



- (51) International Patent Classification:
B23K 26/08 (2014.01) *B41M 5/24* (2006.01)
B21D 43/02 (2006.01)
- (21) International Application Number:
PCT/US2013/054471
- (22) International Filing Date:
12 August 2013 (12.08.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/584,521 13 August 2012 (13.08.2012) US
- (71) Applicant: CROWN PACKAGING TECHNOLOGY, INC. [US/US]; 11535 South Central Avenue, Alsip, IL 60803 (US).
- (72) Inventors: BOISVERT, Clifford, J.; 1432 Morgan Avenue, La Grange Park, IL 60526 (US). MEJIA-QUINCHIA, Carlos, Andres; 434 Redwood Lane, Schaumburg, IL

60193 (US). GOLDING, Richard, Mark, Orlando; 2 N Maple Street, Mount Prospect, IL 60056 (US).

- (74) Agents: FULLMER, Harold, H. et al.; WOODCOCK WASHBURN LLP, Cira Centre, 12th Floor, 2929 Arch Street, Philadelphia, PA 19104 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

[Continued on next page]

- (54) Title: LASER MARKING SYSTEM AND METHOD

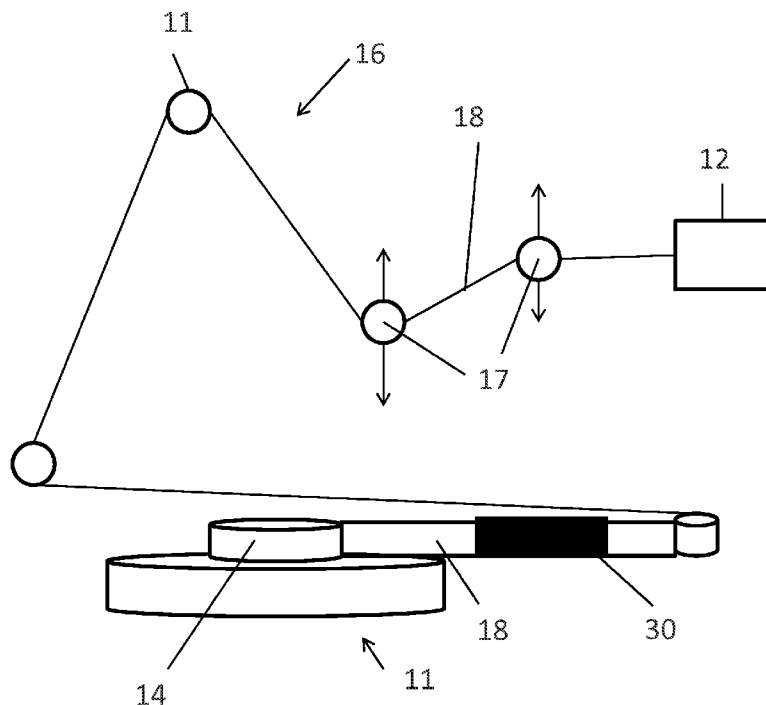


Fig. 3

(57) Abstract: A system for creating marked can tabs may include an isolation mechanism located in the path of the tab material strip between a tab material dereeler and a tab forming press and a system suitable for marking the tab material strip. The isolation mechanism may be configured to convert discontinuous motion of the tab material strip proximate the tab forming press into continuous motion of the tab material strip at the dereeler. The system may be suitable for marking the tab material strip. The marking system may be located between the dereeler and the isolation mechanism such that the laser system acts on the tab material strip while it is moving at a relatively constant speed.



UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*