



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :
H01P 7/06, 1/211

A2

(11) International Publication Number:

WO 98/54783

(43) International Publication Date:

3 December 1998 (03.12.98)

(21) International Application Number: PCT/SE98/00918

(22) International Filing Date: 15 May 1998 (15.05.98)

(30) Priority Data:
9702063-0 30 May 1997 (30.05.97) SE(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON
[SE/SE]; S-126 25 Stockholm (SE).(72) Inventors: HENNINGSSON, Bo, Uno, Egon; Bragevägen
5, S-149 30 Nynäshamn (SE). LINDELL, Sven, Patrik;
Smedvägen 7, S-176 71 Järfälla (SE).(74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent
Dept., S-164 80 Stockholm (SE).(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW,
MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ,
TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent
(GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI,
CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished
upon receipt of that report.


162162



G00002

DCS
COPY

(54) Title: FILTER TUNING DEVICE AND TUNING PLATE INCLUDING A NUMBER OF SUCH DEVICES

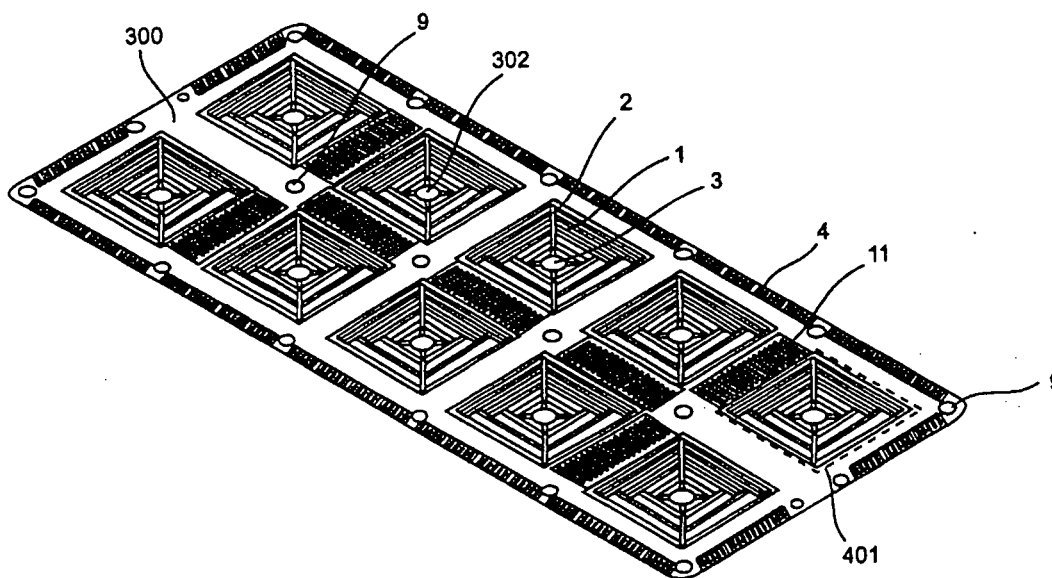

(57) Abstract

The present invention relates to a tuning device in a radio filter equipment for mobile telephony in which one or more cavities in the equipment should be tuned to the right frequency. The invention also relates to a tuning plate including a number of such tuning devices. The tuning device (401) consists of preferably regular or square formed depressed parts (1, 6) in the tuning plate (300) of the filter equipment. The depressed part converges each to a square formed central plate (5) which is provided with an elevation or bulb (3) upwards. By turning a tuning screw on the equipment will then develop a force on the plate and the surrounding depressed parts. This implies that the tuning can be made automatically, more secure and with less risk for intermodulation. Different embodiments of the depressed parts are described.