



- (51) International Patent Classification:
B02C 2/04 (2006.01)
- (21) International Application Number:
PCT/IL2012/050268
- (22) International Filing Date:
24 July 2012 (24.07.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/195,039 1 August 2011 (01.08.2011) US
- (71) Applicant (for all designated States except US): **OLIVE X-PRESS LTD** [IL/IL]; 44A Hashikmin Street, 45201 Hod Hasharon (IL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **TURGEMAN, Eric** [IL/IL]; 16 David Yellin Street ap. 11, 62964 Tel-Aviv (IL). **GERSHONY, Yariv** [IL/IL]; 44A Hashikmin Street, 45201 Hod Hasharon (IL).
- (74) Agent: **AGMON, Jonathan**; Soroker - Agmon Advocates and Patent, Attorneys Nolton House 14 Shenkar Street, 46725 Herzeliya Pituach (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR PREPARING OLIVE PASTE FOR OIL EXTRACTION

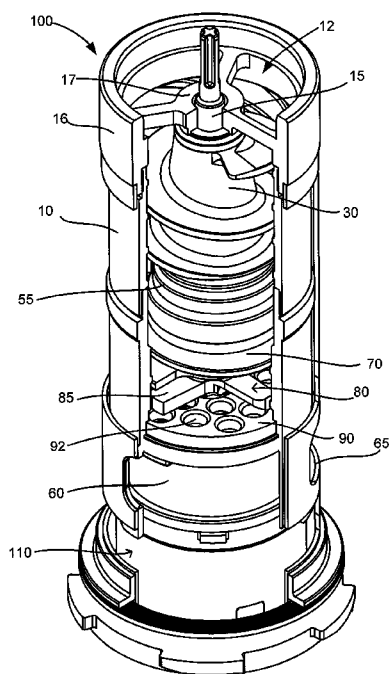


FIG. 2B

(57) Abstract: A device and method for processing aggregate material, in particular for preparing olive paste for the extraction of oil. The device comprises a housing having an inlet for receiving aggregate material, a driving shaft coinciding with the central longitudinal axis of the housing, a crushing drum mounted on an eccentric segment of the driving shaft, free to rotate thereabout, and a final grinder located downstream the crushing drum.



MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, **Published:**

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, ML, MR, NE, SN, TD, TG).

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*