PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : C09G 1/02 | A1

(11) International Publication Number: **WO 00/17282**

(43) International Publication Date: 30 March 2000 (30.03.00)

(21) International Application Number: PCT/KR99/00123

(22) International Filing Date: 19 March 1999 (19.03.99)

(30) Priority Data:
98/39212 22 September 1998 (22.09.98) KR

(71) Applicant *(for all designated States except US)*: SAMSUNG GENERAL CHEMICALS CO., LTD. [KR/KR]; San 222–2, Dokgot–ri, Daesan–eup, Susan–shi, Chungnam–do 356–711 (KR).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: LEE, Kil, Sung [KR/KR]; Boramae Samsung Apt. 103–1007, 1698–1, Bongchun–1dong, Kwanak–ku, Seoul 151–751 (KR). LEE, Jae, Seok [KR/KR]; Dongbaek Apt., 103–1502, Ojun–dong, Euiwang–shi, Kyongki–do 437–070 (KR). KIM, Seok, Jin [KR/KR]; 7–8, Sinsa–dong, Eunpyung–ku, Seoul 122–081 (KR). CHANG, Tu, Won [KR/KR]; Sejong Apt., 103–1103, Chunmin–dong, Yusung–ku, Taejon–shi 305–390 (KR).

(74) Agent: KIM, Hak, Je; Phoenix International, Kwangwhamoon, P.O. Box 1828, Seoul 110–618 (KR).

(81) Designated States: CN, JP, SG, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: PROCESS FOR PREPARING METAL OXIDE SLURRY SUITABLE FOR SEMICONDUCTOR CHEMICAL MECHANICAL POLISHING

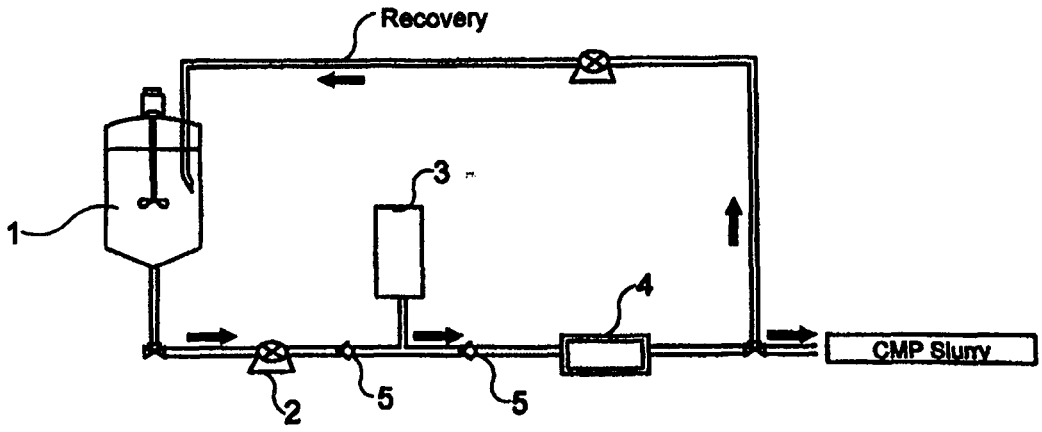

(57) Abstract

There is disclosed a process for preparing a metal oxide CMP slurry suitable for semiconductor devices, wherein a mixture comprising 1 to 50 weight % of a metal oxide and 50 to 99 weight % of water is mixed in a pre–mixing tank, transferred to a dispersion chamber with the aid of a transfer pump, allowed to have a flow rate of not less than 100 m/sec by pressurization with a high pressure pump, and subjected to counter collision for dispersion through two orifices in the dispersion chamber. The slurry has particles which are narrow in particle size distribution, showing an ultrafine size ranging from 30 to 500 nm. Also, the slurry is not polluted at all during its preparation and shows no tailing phenomena, so that it is preventive of μ–scratching. Therefore, it can be used in the planarization for shallow trench isolation, interlayer dielectrics and intermetal dielectrics through a CMP process.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	**ES**	Spain	**LS**	Lesotho	**SI**	Slovenia
AM	Armenia	**FI**	Finland	**LT**	Lithuania	**SK**	Slovakia
AT	Austria	**FR**	France	**LU**	Luxembourg	**SN**	Senegal
AU	Australia	**GA**	Gabon	**LV**	Latvia	**SZ**	Swaziland
AZ	Azerbaijan	**GB**	United Kingdom	**MC**	Monaco	**TD**	Chad
BA	Bosnia and Herzegovina	**GE**	Georgia	**MD**	Republic of Moldova	**TG**	Togo
BB	Barbados	**GH**	Ghana	**MG**	Madagascar	**TJ**	Tajikistan
BE	Belgium	**GN**	Guinea	**MK**	The former Yugoslav Republic of Macedonia	**TM**	Turkmenistan
BF	Burkina Faso	**GR**	Greece			**TR**	Turkey
BG	Bulgaria	**HU**	Hungary	**ML**	Mali	**TT**	Trinidad and Tobago
BJ	Benin	**IE**	Ireland	**MN**	Mongolia	**UA**	Ukraine
BR	Brazil	**IL**	Israel	**MR**	Mauritania	**UG**	Uganda
BY	Belarus	**IS**	Iceland	**MW**	Malawi	**US**	United States of America
CA	Canada	**IT**	Italy	**MX**	Mexico	**UZ**	Uzbekistan
CF	Central African Republic	**JP**	Japan	**NE**	Niger	**VN**	Viet Nam
CG	Congo	**KE**	Kenya	**NL**	Netherlands	**YU**	Yugoslavia
CH	Switzerland	**KG**	Kyrgyzstan	**NO**	Norway	**ZW**	Zimbabwe
CI	Côte d'Ivoire	**KP**	Democratic People's Republic of Korea	**NZ**	New Zealand		
CM	Cameroon			**PL**	Poland		
CN	China	**KR**	Republic of Korea	**PT**	Portugal		
CU	Cuba	**KZ**	Kazakstan	**RO**	Romania		
CZ	Czech Republic	**LC**	Saint Lucia	**RU**	Russian Federation		
DE	Germany	**LI**	Liechtenstein	**SD**	Sudan		
DK	Denmark	**LK**	Sri Lanka	**SE**	Sweden		
EE	Estonia	**LR**	Liberia	**SG**	Singapore		