PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification [7]: G11B 5/48	A1	(11) International Publication Number: WO 00/30078
		(43) International Publication Date: 25 May 2000 (25.05.00)

(21) International Application Number: PCT/US99/27320

(22) International Filing Date: 17 November 1999 (17.11.99)

(30) Priority Data:
60/109,226 18 November 1998 (18.11.98) US

(71) Applicant: SEAGATE TECHNOLOGY, INC. [US/US]; 920 Disc Drive, Scotts Valley, CA 95067 (US).


(72) Inventors: MURPHY, James, Morgan; 3322 Hickok Place, Boulder, CO 80301 (US). HARRISON, Joshua, Charles; Building 58, Apt. D, Escondido Village, Stanford, CA 94305-7169 (US).

(74) Agents: DAIGNAULT, Ronald, A. et al.; Merchant & Gould P.C., 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402-4131 (US).

(81) Designated States: CN, DE, DB (Utility model), GB, JP, KR, KR (Utility model), SG.

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: DISC DRIVE ANTI-SHOCK SUSPENSION CUSHIONS

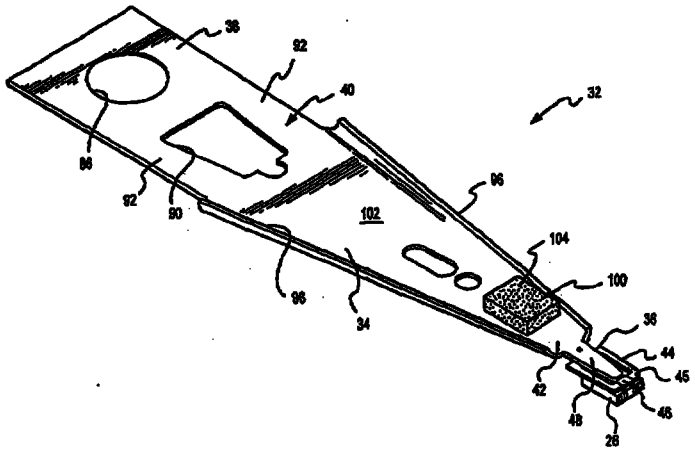

(57) Abstract

A suspension for connecting a slider to an actuator arm of a disc drive includes a cushion extending vertically from the suspension. The cushion limits vertical excursions and dampens motion of the suspension during a shock event to better maintain the slider in contact with a disc surface in the disc drive. The cushion can be formed as an external feature attached to the suspension, such as a foam or plastic cushion, or as an integral feature of the suspension. A disc drive assembly having a plurality of discs includes a first suspension and a first cushion extending vertically downward toward a second suspension. The second suspension may include a second cushion extending vertically upward toward the first suspension. The first cushion and one of the second suspension or the second cushion are spaced apart by a predetermined distance under normal operating conditions and engage one another to limit vertical excursions and dampen motion of the first and second suspensions when the disc drive undergoes a shock event.