

CATALYSTS FOR MAKING
ETHANOL FROM ACETIC ACID

PRIORITY CLAIM

[0001] This application claims the priority of U.S. Application Number 12/588,727, filed October 26, 2009, entitled "Tunable Catalyst Gas Phase Hydrogenation of Carboxylic Acids," the entirety of which is incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates generally to catalysts for use in processes for hydrogenating acetic acid to form ethanol, the catalysts having high selectivities for ethanol.

BACKGROUND OF THE INVENTION

[0003] There is a long felt need for an economically viable processes and catalysts to convert acetic acid to ethanol which may be used in its own right or subsequently converted to ethylene which is an important commodity feedstock as it can be converted to vinyl acetate and/or ethyl acetate or any of a wide variety of other chemical products. For example, ethylene can also be converted to numerous polymer and monomer products. Fluctuating natural gas and crude oil prices contribute to fluctuations in the cost of conventionally produced, petroleum or natural gas-sourced ethylene, making the need for alternative sources of ethylene all the greater when oil prices rise.

[0004] Catalytic processes for reducing alkanolic acids and other carbonyl group containing compounds have been widely studied, and a variety of combinations of catalysts, supports and operating conditions have been mentioned in the literature. The reduction of various carboxylic acids over metal oxides is reviewed by T. Yokoyama et al. in "Fine chemicals through heterogeneous catalysis. Carboxylic acids and derivatives." Chapter 8.3.1, summarizes some of the developmental efforts for hydrogenation catalysts for various carboxylic acids. (Yokoyama, T.; Setoyama, T. "Carboxylic acids and derivatives." in: "Fine chemicals through heterogeneous catalysis." 2001, 370-379.)

[0005] A series of studies by M. A. Vannice et al. concern the conversion of acetic acid over a variety of heterogeneous catalysts (Rachmady W.; Vannice, M. A.; *J. Catal.* (2002) Vol. 207,

pg. 317-330.) The vapor-phase reduction of acetic acid by H₂ over both supported and unsupported iron was reported in a separate study. (Rachmady, W.; Vannice, M. A. *J. Catal.* (2002) Vol. 208, pg. 158-169.) Further information on catalyst surface species and organic intermediates is set forth in Rachmady, W.; Vannice, M. A., *J. Catal.* (2002) Vol. 208, pg. 170-179). Vapor-phase acetic acid hydrogenation was studied further over a family of supported Pt-Fe catalysts in Rachmady, W.; Vannice, M. A. *J. Catal.* (2002) Vol. 209, pg. 87-98) and Rachmady, W.; Vannice, M. A. *J. Catal.* (2000) Vol. 192, pg. 322-334).

[0006] Various related publications concerning the selective hydrogenation of unsaturated aldehydes may be found in (Djeboua, F.; Benachour, D.; Touroude, R. *Applied Catalysis A: General* 2005, 282, 123-133.; Liberkova, K.; Touroude, R.J. *Mol. Catal.* 2002, 180, 221-230.; Rodrigues, E. L.; Bueno, J. M. C. *Applied Catalysis A: General* 2004, 257, 210-211.; Ammari, F.; Lamotte, J.; Touroude, R. *J. Catal.* 2004, 221, 32-42; Ammari, F.; Milone, C.; Touroude, R. *J. Catal.* 2005, 235, 1-9.; Consonni, M.; Jokic, D.; Murzin, D. Y.; Touroude, R.J. *Catal.* 1999, 188, 165-175.; Nitta, Y.; Ueno, K.; Imanaka, T.; *Applied Catal.* 1989, 56, 9-22.)

[0007] Studies reporting activity and selectivity over cobalt, platinum and tin-containing catalysts in the selective hydrogenation of crotonaldehyde to the unsaturated alcohol are found in R. Touroude et al. (Djeboua, F.; Benachour, D.; Touroude, R. *Applied Catalysis A: General* 2005, 282, 123-133 as well as Liberkova, K.; Touroude, R.; *J. Mol. Catal.* 2002, 180, 221-230) as well as K. Lazar et al. (Lazar, K.; Rhodes, W. D.; Borbath, I.; Hegedues, M.; Margitfalvi, I. L. *Hyperfine Interactions* 2002, 1391140, 87-96.)

[0008] M. Santiago et al. (Santiago, M. A. N.; Sanchez-Castillo, M. A.; Cortright, R. D.; Dumesic, J. A. *J. Catal.* 2000, 193, 16-28.) discuss microcalorimetric, infrared spectroscopic, and reaction kinetics measurements combined with quantum-chemical calculations.

[0009] Catalytic activity in for the acetic acid hydrogenation has also been reported for heterogeneous systems with rhenium and ruthenium. (Ryashentseva, M. A.; Minachev, K. M.; Buiychev, B. M.; Ishchenko, V. M. *Bull. Acad Sci. USSR* 1988, 2436-2439).

[0010] United States Patent No. 5,149,680 to Kitson et al. describes a process for the catalytic hydrogenation of carboxylic acids and their anhydrides to alcohols and/or esters utilizing platinum group metal alloy catalysts. United States Patent No. 4,777,303 to Kitson et al. describes a process for the productions of alcohols by the hydrogenation of carboxylic acids. United States Patent No. 4,804,791 to Kitson et al. describes another process for the production

of alcohols by the hydrogenation of carboxylic acids. See also USP 5,061,671; USP 4, 990,655; USP 4,985,572; and USP 4,826,795.

[0011] Malinowski et al. (*Bull. Soc. Chim. Belg.* (1985), 94(2), 93-5), discuss reaction catalysis of acetic acid on low-valent titanium heterogenized on support materials such as silica (SiO_2) or titania (TiO_2).

[0012] Bimetallic ruthenium-tin/silica catalysts have been prepared by reaction of tetrabutyl tin with ruthenium dioxide supported on silica. (*Loessard et al., Studies in Surface Science and Catalysis* (1989), Volume Date 1988, 48 (*Struct. React. Surf.*), 591-600.)

[0013] The catalytic reduction of acetic acid has also been studied in, for instance, Hindermann et al., (*Hindermann et al., J. Chem. Res., Synopses* (1980), (11), 373), disclosing catalytic reduction of acetic acid on iron and on alkali-promoted iron.

[0014] Existing processes suffer from a variety of issues impeding commercial viability including: (i) catalysts without requisite selectivity to ethanol; (ii) catalysts which are possibly prohibitively expensive and/or nonselective for the formation of ethanol and that produce undesirable by-products; and/or (iii) insufficient catalyst life. Thus, the need exists for novel hydrogenation catalysts that have high selectivity, conversion, and productivity to ethanol having catalyst lifetimes that are suitable for commercial hydrogenation processes.

SUMMARY OF THE INVENTION

[0015] The present invention is directed to catalysts and processes for making catalysts that are suitable for use in processes for hydrogenating acetic acid to ethanol at high selectivities.

[0016] In one embodiment, for example, the invention relates to a catalyst comprising a first metal, a siliceous support, at least one metasilicate support modifier, and optionally, a second metal. In another embodiment, the catalyst comprises a first metal, a second metal, a siliceous support, and at least one support modifier. The first metal may be selected from the group consisting of Group IB, IIB, IIIB, IVB, VB, VIB, VIIB, or VIII transitional metal, a lanthanide metal, an actinide metal or a metal from any of Groups IIIA, IVA, VA, or VIA. More preferably, the first metal may be selected from the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten, and the second metal being selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten,

palladium, platinum, lanthanum, cerium, manganese, rhenium, and nickel. The first metal may be present in an amount of from 0.1 to 25 wt.%, based on the total weight of the catalyst.

[0017] The second metal may be selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, ruthenium, rhenium, gold, and nickel. The first metal may be present in an amount of from 0.1 to 10 wt.% and the second metal may be present in an amount of from 0.1 to 10 wt.%, based on the total weight of the catalyst. In one aspect, the catalyst may comprise a third metal, which may be selected from the group consisting of cobalt, palladium, ruthenium, copper, zinc, platinum, tin, and rhenium and/or which may be present in an amount of 0.05 and 4 wt.%, based on the total weight of the catalyst.

[0018] Preferably, the first metal is platinum and the second metal is tin having a molar ratio of platinum to tin being from 0.4:0.6 to 0.6:0.4. In another preferred combination, the first metal is palladium and the second metal is rhenium having molar ratio of rhenium to palladium being from 0.7:0.3 to 0.85:0.15. As noted above, the catalysts may be suitable for use as a hydrogenation catalyst in converting acetic acid to ethanol and yields an acetic acid conversion of at least 10%. Also, the catalysts may have a selectivity to ethanol of at least 80% and/or a selectivity to methane, ethane, and carbon dioxide of less than 4%. In one embodiment, the catalyst has a productivity that decreases less than 6% per 100 hours of catalyst usage.

[0019] The siliceous support may optionally be selected from the group consisting of silica, silica/alumina, calcium metasilicate, pyrogenic silica, high purity silica, and mixtures thereof and may be present in an amount of 25 wt.% to 99 wt.%, based on the total weight of the catalyst. The siliceous support has a surface area of from 50 m²/g to 600 m²/g.

[0020] The support modifier, e.g., metasilicate support modifier, may optionally be selected from the group consisting of (i) alkaline earth metal metasilicates, (ii) alkali metal metasilicates, (iii) Group IIB metal metasilicates, (iv) Group IIIB metal metasilicates, and mixtures thereof. As one option, the support modifier may be selected from metasilicates of a metal selected from the group consisting of sodium, potassium, magnesium, scandium, yttrium, and zinc, preferably being CaSiO₃. The support modifier may be present in an amount of 0.1 wt.% to 50 wt.%, based on the total weight of the catalyst.

[0021] In another embodiment, the catalyst satisfies the formula:



wherein: (i) the ratio of $v:y$ is between 3:2 and 2:3, and/or (ii) the ratio of $w:x$ is between 1:3 and 1:5; and p and q are selected such that $p:q$ is from 1:20 to 1:200 with r being selected to satisfy valence requirements and v and w being selected such that:

$$0.005 \leq \frac{(3.25v + 1.75w)}{q} \leq 0.05.$$

[0022] As another option, the catalyst may satisfy the formula:



wherein: (i) v and y are between 3:2 and 2:3; and/or (ii) w and x are between 1:3 and 1:5; and p and z and the relative locations of aluminum and calcium atoms present are controlled such that Brønsted acid sites present upon the surface thereof are balanced by a support modifier; and p and q are selected such that $p:q$ is from 1:20 to 1:200 with r being selected to satisfy valence requirements, and v and w are selected such that:

$$0.005 \leq \frac{(3.25v + 1.75w)}{q} \leq 0.05.$$

[0023] In addition to catalysts, the invention also relates to processes for preparing catalysts. A preferred embodiment relates to a process for preparing a catalyst, the process comprising the steps of (a) contacting a first metal precursor to a first metal with a modified siliceous support to form an impregnated support, wherein the modified siliceous support comprises a siliceous material and at least one metasilicate support modifier; and (b) heating the impregnated support under conditions effective to reduce the first metal and form the catalyst. Preferably, the heating occurs under a reducing atmosphere, at least in part. Optionally, the process may further comprise the steps of (c) contacting the at least one metasilicate support modifier or a precursor thereof with the siliceous material to form a modified support precursor; and (d) heating the modified support precursor under conditions effective to form the modified support, and also may further comprise calcining the catalyst. In one aspect, the process further comprises the steps of impregnating and reducing a second metal precursor to a second metal different from the first metal on the support either before, after, or concurrently with steps (a) and (b). In yet another aspect, the process further comprises the steps of

impregnating and reducing a third metal precursor to a third metal different from the first metal and the second metal on the support either before, after, or concurrently with steps (a) and (b).

[0024] In addition, another embodiment of the invention relates to a process comprising the steps of (a) contacting a first metal precursor to a first metal with a modified siliceous support comprising at least one support modifier, wherein the first metal is selected from the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten; (b) contacting a second metal precursor to a second metal, different from the first metal, with the modified siliceous support, wherein the second metal is selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, rhenium, and nickel; and (c) heating the modified siliceous support under conditions effective to reduce the first metal and the second metal and form the catalyst. In one aspect, the heating occurs after steps (a) and (b). Alternatively, the heating occurs (optionally under a reducing atmosphere, at least in part) between steps (a) and (b) to reduce the first metal and after steps (a) and (b) to reduce the second metal. Optionally, the process may further comprise the steps of (c) contacting the at least one metasilicate support modifier or a precursor thereof with the siliceous material to form a modified support precursor; and (d) heating the modified support precursor under conditions effective to form the modified support, and also may further comprise calcining the catalyst. The calcining may occur after steps (a) and (b) or between steps (a) and (b). In yet another aspect, the processes further comprise the steps of impregnating and reducing a third metal precursor to a third metal different from the first metal and the second metal on the support either before, after, or concurrently with steps (a) and (b).

[0025] Regarding the inventive processes, the catalyst and components thereof, e.g., the first metal, the second metal, the third metal (optional), the (siliceous) support, and the (metasilicate) support modifier, utilized in the inventive processes may be as are described above in relation to the inventive catalysts.

BRIEF DESCRIPTION OF DRAWINGS

[0026] The invention is described in detail below with reference to the appended drawings, wherein like numerals designate similar parts.

[0027] FIG. 1A is a graph of the selectivity to ethanol and ethyl acetate using a $\text{SiO}_2\text{-Pt}_m\text{Sn}_{1-m}$ catalyst;

[0028] FIG. 1B is a graph of the productivity to ethanol and ethyl acetate of the catalyst of FIG. 1A;

[0029] FIG. 1C is a graph of the conversion of the acetic acid of the catalyst of FIG. 1A;

[0030] FIG. 2A is a graph of the selectivity to ethanol and ethyl acetate using a $\text{SiO}_2\text{-Re}_n\text{Pd}_{1-n}$ catalyst;

[0031] FIG. 2B is a graph of the productivity to ethanol and ethyl acetate of the catalyst of FIG. 2A;

[0032] FIG. 2C is a graph of the conversion of the acetic acid of the catalyst of FIG. 2A;

[0033] FIG. 3A is a graph of the productivity of a catalyst to ethanol at 15 hours of testing;

[0034] FIG. 3B is a graph of the selectivity of the catalyst of FIG. 3A to ethanol;

[0035] FIG. 4A is a graph of the productivity of a catalyst to ethanol over 100 hours of testing according to another embodiment of the invention;

[0036] FIG. 4B is a graph of the selectivity of the catalyst of FIG. 4A to ethanol;

[0037] FIG. 5A is a graph of productivity of a catalyst to ethanol over 20 hours of testing according to another embodiment of the invention;

[0038] FIG. 5B is a graph of the selectivity of the catalyst of FIG. 5A to ethanol;

[0039] FIG. 6A is a graph of the conversion of the catalysts of Example 18;

[0040] FIG. 6B is a graph of the productivity of the catalysts of Example 18;

[0041] FIG. 6C is a graph of the selectivity at 250°C of the catalysts of Example 18; and


[0042] FIG. 6D is a graph of the selectivity at 275°C of the catalysts of Example 18.

DETAILED DESCRIPTION OF THE INVENTION

[0043] The present invention relates to catalysts for use in processes for producing ethanol by hydrogenating acetic acid in the presence of a catalyst. The catalyst employed comprises at least one metal, a siliceous support, and at least one support modifier, preferably a

metasilicate support modifier. The present invention also relates to processes for making these catalysts.

[0044] The hydrogenation of acetic acid to form ethanol may be represented by the following reaction:

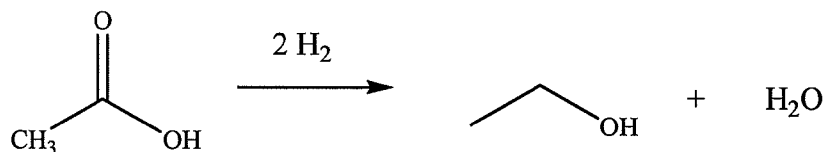

[0045] It has surprisingly and unexpectedly been discovered that the catalysts of the present invention provide high selectivities to ethoxylates, such as ethanol and ethyl acetate, and in particular to ethanol, when employed in the hydrogenation of acetic acid. Embodiments of the present invention beneficially may be used in industrial applications to produce ethanol on an economically feasible scale.

[0046] The catalyst of the invention comprises a first metal and optionally one or more of a second metal, a third metal or additional metals on the support. In this context, the numerical terms “first,” “second,” “third,” etc., when used to modify the word “metal,” are meant to indicate that the respective metals are different from one another. The total weight of all supported metals present in the catalyst preferably is from 0.1 to 25 wt.%, e.g., from 0.1 to 15 wt.%, or from 0.1 wt.% to 10 wt.%. For purposes of the present specification, unless otherwise indicated, weight percent is based on the total weight the catalyst including metal and support. The metal(s) in the catalyst may be present in the form of one or more metal oxides. For purposes of determining the weight percent of the metal(s) in the catalyst, the weight of any oxygen that is bound to the metal is ignored.

[0047] The first metal may be a Group IB, IIB, IIIB, IVB, VB, VIB, VIIB, or VIII transitional metal, a lanthanide metal, an actinide metal or a metal from any of Groups IIIA, IVA, VA, or VIA. In a preferred embodiment, the first metal is selected the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten. Preferably, the first metal is selected from the group consisting of platinum, palladium, cobalt, nickel, and ruthenium. More preferably, the first metal is selected from platinum and palladium. When the first metal comprises platinum, it is preferred that the catalyst comprises platinum in an amount less than 5 wt.%, e.g., less than 3 wt.% or less than 1 wt.%, due to the availability of platinum.

[0048] As indicated above, the catalyst optionally further comprises a second metal, which typically would function as a promoter. If present, the second metal preferably is selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, ruthenium, rhenium, gold, and nickel. More preferably, the second metal is selected from the group consisting of copper, tin, cobalt, rhenium, and nickel. More preferably, the second metal is selected from tin and rhenium.

[0049] Where the catalyst includes two or more metals, one metal may act as a promoter metal and the other metal is the main metal. For instance, with a platinum/tin catalyst, platinum may be considered to be the main metal and tin may be considered the promoter metal. For convenience, the present specification refers to the first metal as the primary catalyst and the second metal (and optional metals) as the promoter(s). This should not be taken as an indication of the underlying mechanism of the catalytic activity.

[0050] If the catalyst includes two or more metals, e.g., a first metal and a second metal, the first metal optionally is present in the catalyst in an amount from 0.1 to 10 wt.%, e.g., from 0.1 to 5 wt.%, or from 0.1 to 3 wt.%. The second metal preferably is present in an amount from 0.1 and 20 wt.%, e.g., from 0.1 to 10 wt.%, or from 0.1 to 5 wt.%. For catalysts comprising two or more metals, the two or more metals may be alloyed with one another or may comprise a non-alloyed metal solution or mixture.

[0051] The preferred metal ratios may vary somewhat depending on the metals used in the catalyst. In some embodiments, the mole ratio of the first metal to the second metal preferably is from 10:1 to 1:10, e.g., from 4:1 to 1:4, from 2:1 to 1:2, from 1.5:1 to 1:1.5 or from 1.1:1 to 1:1.1. It has now surprisingly and unexpectedly been discovered that for platinum/tin catalysts, platinum to tin molar ratios on the order of from 0.4:0.6 to 0.6:0.4 (or about 1:1) are particularly preferred in order to form ethanol from acetic acid at high selectivity, conversion and productivity, as shown in FIGS. 1A, 1B and 1C. Selectivity to ethanol may be further improved by incorporating modified supports as described herein.

[0052] Molar ratios other than 1:1 may be preferred for catalysts comprising different metals. With rhenium/palladium catalysts, for example, higher ethanol selectivities may be achieved at higher rhenium loadings than palladium loadings. As shown in FIGS. 2A, 2B and 2C, preferred rhenium to palladium molar ratios for forming ethanol in terms of selectivity, conversion and production are on the order of 0.7:0.3 to 0.85:0.15, or about 0.75:0.25 (3:1).

Again, selectivity to ethanol may be further improved by incorporating modified supports as described herein.

[0053] In embodiments when the catalyst comprises a third metal, the third metal may be selected from any of the metals listed above in connection with the first or second metal, so long as the third metal is different from the first and second metals. In preferred aspects, the third metal is selected from the group consisting of cobalt, palladium, ruthenium, copper, zinc, platinum, tin, and rhenium. More preferably, the third metal is selected from cobalt, palladium, and ruthenium. When present, the total weight of the third metal preferably is from 0.05 and 4 wt.%, e.g., from 0.1 to 3 wt.%, or from 0.1 to 2 wt.%.

[0054] In one embodiment, the catalyst comprises a first metal and no additional metals (no second metal, etc.). In this embodiment, the first metal preferably is present in an amount from 0.1 to 10 wt. %. In another embodiment, the catalyst comprises a combination of two or more metals on a support. Specific preferred metal compositions for various catalysts of this embodiment of the invention are provided below in Table 1. Where the catalyst comprises a first metal and a second metal, the first metal preferably is present in an amount from 0.1 to 5 wt.% and the second metal preferably is present in an amount from 0.1 to 5 wt.%. Where the catalyst comprises a first metal, a second metal and a third metal, the first metal preferably is present in an amount from 0.1 to 5 wt.%, the second metal preferably is present in an amount from 0.1 to 5 wt.%, and the third metal preferably is present in an amount from 0.1 to 2 wt.%. In one exemplary embodiment, the first metal is platinum and is present in an amount from 0.1 to 5 wt.%, the second metal is present in an amount from 0.1 to 5 wt.%, and the third metal, if present, preferably is present in an amount from 0.05 to 2 wt.%.

TABLE 1
EXEMPLARY METAL COMBINATIONS FOR CATALYSTS

First Metal	Second Metal	Third Metal
Cu	Ag	
Cu	Cr	
Cu	V	
Cu	W	
Cu	Zn	
Ni	Au	
Ni	Re	
Ni	V	
Ni	W	
Pd	Co	
Pd	Cr	
Pd	Cu	
Pd	Fe	
Pd	La	
Pd	Mo	
Pd	Ni	
Pd	Re	
Pd	Sn	
Pd	V	
Pd	W	
Pt	Co	
Pt	Cr	
Pt	Cu	
Pt	Fe	
Pt	Mo	
Pt	Sn	
Pt	Sn	Co
Pt	Sn	Re
Pt	Sn	Ru
Pt	Sn	Pd
Rh	Cu	
Rh	Ni	
Ru	Co	
Ru	Cr	
Ru	Cu	
Ru	Fe	
Ru	La	
Ru	Mo	
Ru	Ni	
Ru	Sn	

[0055] Depending primarily on how the catalyst is manufactured, the metals of the catalysts of the present invention may be dispersed throughout the support, coated on the outer surface of the support (egg shell) or decorated on the surface of the support.

[0056] In addition to one or more metals, the catalysts of the present invention further comprise a modified support, meaning a support that includes a support material and a support modifier, which adjusts the acidity of the support material. For example, the acid sites, e.g. Brønsted acid sites, on the support material may be adjusted by the support modifier to favor selectivity to ethanol during the hydrogenation of acetic acid. The acidity of the support material may be adjusted by reducing the number or reducing the availability of Brønsted acid sites on the support material. The support material may also be adjusted by having the support modifier change the pKa of the support material. Unless the context indicates otherwise, the acidity of a surface or the number of acid sites thereupon may be determined by the technique described in F. Delannay, Ed., "Characterization of Heterogeneous Catalysts"; Chapter III: Measurement of Acidity of Surfaces, p. 370-404; Marcel Dekker, Inc., N.Y. 1984, the entirety of which is incorporated herein by reference. It has now been discovered that in addition to the metal precursors and preparation conditions employed, metal-support interactions may have a strong impact on selectivity to ethanol. In particular, the use of modified supports that adjust the acidity of the support to make the support less acidic or more basic surprisingly and unexpectedly has now been demonstrated to favor formation of ethanol over other hydrogenation products.

[0057] As will be appreciated by those of ordinary skill in the art, support materials are selected such that the catalyst system is suitably active, selective and robust under the process conditions employed for the formation of ethanol. Suitable support materials may include, for example, stable metal oxide-based supports or ceramic-based supports. Preferred supports include siliceous supports, such as silica, silica/alumina, a Group IIA silicate such as calcium metasilicate, pyrogenic silica, high purity silica and mixtures thereof. Other supports may be used in some embodiments of the present invention, including without limitation, iron oxide, alumina, titania, zirconia, magnesium oxide, carbon, graphite, high surface area graphitized carbon, activated carbons, and mixtures thereof.

[0058] In preferred embodiments, the support comprises a basic support modifier having a low volatility or that is non-volatile. Low volatility modifiers have a rate of loss that is low

enough such that the acidity of the support modifier is not reversed during the life of the catalyst. Such basic modifiers, for example, may be selected from the group consisting of: (i) alkaline earth oxides, (ii) alkali metal oxides, (iii) alkaline earth metal metasilicates, (iv) alkali metal metasilicates, (v) Group IIB metal oxides, (vi) Group IIB metal metasilicates, (vii) Group IIIB metal oxides, (viii) Group IIIB metal metasilicates, and mixtures thereof. In addition to oxides and metasilicates, other types of modifiers including nitrates, nitrites, acetates, and lactates may be used in embodiments of the present invention. Preferably, the support modifier is selected from the group consisting of oxides and metasilicates of any of sodium, potassium, magnesium, calcium, scandium, yttrium, and zinc, and mixtures of any of the foregoing. Preferably, the support modifier is a calcium silicate, more preferably calcium metasilicate (CaSiO_3). If the support modifier comprises calcium metasilicate, it is preferred that at least a portion of the calcium metasilicate is in crystalline form.

[0059] The total weight of the modified support, which includes the support material and the support modifier, based on the total weight of the catalyst, preferably is from 75 wt.% to 99.9 wt.%, e.g., from 78 wt.% to 97 wt.%, or from 80 wt.% to 95 wt.%. The support modifier preferably is provided in an amount sufficient to adjust the acidity, e.g., by reducing the number or reducing the availability of active Brønsted acid sites, and more preferably to ensure that the surface of the support is substantially free of active Brønsted acid sites. In preferred embodiments, the support modifier is present in an amount from 0.1 wt.% to 50 wt.%, e.g., from 0.2 wt.% to 25 wt.%, from 0.5 wt.% to 15 wt.%, or from 1 wt.% to 8 wt.%, based on the total weight of the catalyst. In preferred embodiments, the support material is present in an amount from 25 wt.% to 99 wt.%, e.g., from 30 wt.% to 97 wt.% or from 35 wt.% to 95 wt.%.

[0060] In one embodiment, the support material is a siliceous support material selected from the group consisting of silica, silica/alumina, a Group IIA silicate such as calcium metasilicate, pyrogenic silica, high purity silica and mixtures thereof. In the case where silica is used as the siliceous support, it is beneficial to ensure that the amount of aluminum, which is a common contaminant for silica, is low, preferably under 1 wt.%, e.g., under 0.5 wt.% or under 0.3 wt.%, based on the total weight of the modified support. In this regard, pyrogenic silica is preferred as it commonly is available in purities exceeding 99.7 wt.%. High purity silica, as used throughout the application, refers to silica in which acidic contaminants such as aluminum are present, if at all, at levels of less than 0.3 wt.%, e.g., less than 0.2 wt.% or less

than 0.1 wt.%. When calcium metasilicate is used as a support modifier, it is not necessary to be quite as strict about the purity of the silica used as the support material although aluminum remains undesirable and will not normally be added intentionally. The aluminum content of such silica, for example, may be less than 10 wt.%, e.g., less than 5 wt.% or less than 3 wt.%. In cases where the support comprises a support modifier in the range of from 2 wt.% to 10 wt.%, larger amount of acidic impurities, such as aluminum, can be tolerated so long as they are substantially counter-balanced by an appropriate amount of a support modifier.

[0061] The surface area of the siliceous support material, e.g., silica, preferably is at least about 50 m²/g, e.g., at least about 100 m²/g, at least about 150 m²/g, at least about 200 m²/g or most preferably at least about 250 m²/g. In terms of ranges, the siliceous support material, e.g., silica, preferably has a surface area of from 50 to 600 m²/g, e.g., from 100 to 500 m²/g or from 100 to 300 m²/g. High surface area silica, as used throughout the application, refers to silica having a surface area of at least about 250 m²/g. For purposes of the present specification, surface area refers to BET nitrogen surface area, meaning the surface area as determined by ASTM D6556-04, the entirety of which is incorporated herein by reference.

[0062] The siliceous support material also preferably has an average pore diameter of from 5 to 100 nm, e.g., from 5 to 30 nm, from 5 to 25 nm or from about 5 to 10 nm, as determined by mercury intrusion porosimetry, and an average pore volume of from 0.5 to 2.0 cm³/g, e.g., from 0.7 to 1.5 cm³/g or from about 0.8 to 1.3 cm³/g, as determined by mercury intrusion porosimetry.

[0063] The morphology of the support material, and hence of the resulting catalyst composition, may vary widely. In some exemplary embodiments, the morphology of the support material and/or of the catalyst composition may be pellets, extrudates, spheres, spray dried microspheres, rings, pentarings, trilobes, quadrilobes, multi-lobal shapes, or flakes although cylindrical pellets are preferred. Preferably, the siliceous support material has a morphology that allows for a packing density of from 0.1 to 1.0 g/cm³, e.g., from 0.2 to 0.9 g/cm³ or from 0.5 to 0.8 g/cm³. In terms of size, the silica support material preferably has an average particle size, e.g., meaning the diameter for spherical particles or equivalent spherical diameter for non-spherical particles, of from 0.01 to 1.0 cm, e.g., from 0.1 to 0.5 cm or from 0.2 to 0.4 cm. Since the one or more metal(s) that are disposed on or within the modified support are generally very small in size, they should not substantially impact the size of the

overall catalyst particles. Thus, the above particle sizes generally apply to both the size of the modified supports as well as to the final catalyst particles.

[0064] A preferred silica support material is SS61138 High Surface Area (HSA) Silica Catalyst Carrier from Saint Gobain NorPro. The Saint-Gobain NorPro SS61138 silica contains approximately 95 wt.% high surface area silica; a surface area of about 250 m²/g; a median pore diameter of about 12 nm; an average pore volume of about 1.0 cm³/g as measured by mercury intrusion porosimetry and a packing density of about 0.352 g/cm³ (22 lb/ft³).

[0065] A preferred silica/alumina support material is KA-160 (Sud Chemie) silica spheres having a nominal diameter of about 5 mm, a density of about 0.562 g/ml, in absorptivity of about 0.583 g H₂O/g support, a surface area of about 160 to 175 m²/g, and a pore volume of about 0.68 ml/g.


[0066] In embodiments where it is desired for the catalyst to produce ethanol at high selectivity, as indicated above, controlling the Brønsted acidity of the support material by incorporating a support modifier can be quite beneficial. One possible byproduct of the hydrogenation of acetic acid is ethyl acetate. According to the present invention, the support preferably includes a support modifier that is effective to suppress production of ethyl acetate, rendering the catalyst composition highly selective to ethanol. Thus, the catalyst composition preferably has a low selectivity toward conversion of acetic acid to ethyl acetate and highly undesirable by-products such as alkanes. The acidity of the support preferably is controlled such that less than 4%, preferably less than 2% and most preferably less than about 1% of the acetic acid is converted to methane, ethane and carbon dioxide. In addition, the acidity of the support may be controlled by using a pyrogenic silica or high purity silica as discussed above.

[0067] In one embodiment, the modified support comprises a support material and calcium metasilicate as support modifier in an amount effective to balance Brønsted acid sites resulting, for example, from residual alumina in the silica. Preferably, the calcium metasilicate is present in an amount from 1 wt.% to 10 wt.%, based on the total weight of the catalyst, in order to ensure that the support is essentially neutral or basic in character.

[0068] As the support modifier, e.g., calcium metasilicate, may tend to have a lower surface area than the support material, e.g., siliceous support material, in one embodiment the support material comprises a siliceous support material that includes at least about 80 wt.%,

e.g., at least about 85 wt.% or at least about 90 wt.%, high surface area silica in order to counteract this effect of including a support modifier.

[0069] In another aspect, the catalyst composition may be represented by the formula:



wherein: (i) the ratio of $v:y$ is between 3:2 and 2:3; and/or (ii) the ratio of $w:x$ is between 1:3 and 1:5. Thus, in this embodiment, the catalyst may comprise (i) platinum and tin; (ii) palladium and rhenium; or (iii) platinum, tin, palladium and rhenium. p and q preferably are selected such that $p:q$ is from 1:20 to 1:200 with r being selected to satisfy valence requirements and v and w being selected such that:

$$0.005 \leq \frac{(3.25v + 1.75w)}{q} \leq 0.05$$

[0070] In this aspect, the process conditions and values of v , w , x , y , p , q , and r are preferably chosen such that at least 70% of the acetic acid, e.g., at least 80% or at least 90%, that is converted is converted to a compound selected from the group consisting of ethanol and ethyl acetate while less than 4% of the acetic acid is converted to alkanes. More preferably, the process conditions and values of v , w , x , y , p , q , and r are preferably chosen such that at least 70% of the acetic acid, e.g., at least 80% or at least 90%, that is converted is converted to ethanol, while less than 4% of the acetic acid is converted to alkanes. In many embodiments of the present invention, p is selected, in view of any minor impurities present, to ensure that the surface of the support is essentially free of active Brønsted acid sites.

[0071] In another aspect, the composition of the catalyst comprises:



wherein: (i) v and y are between 3:2 and 2:3; and/or (ii) w and x are between 1:3 and 1:5. p and z and the relative locations of aluminum and calcium atoms present preferably are controlled such that Brønsted acid sites present upon the surface thereof are balanced by the support modifier, e.g., calcium metasilicate; p and q are selected such that $p:q$ is from 1:20 to 1:200 with r being selected to satisfy valence requirements and v and w are selected such that:

$$0.005 \leq \frac{(3.25v + 1.75w)}{q} \leq 0.05$$

[0072] Preferably, in this aspect, the catalyst has a surface area of at least about 100 m²/g, e.g., at least about 150 m²/g, at least about 200 m²/g or most preferably at least about 250 m²/g,

and z and $p \geq z$. In many embodiments of the present invention, p is selected, in view of any minor impurities present, to also ensure that the surface of the support is substantially free of active Brønsted acid sites which seem to facilitate conversion of ethanol into ethyl acetate. Thus, as with the previous embodiment, the process conditions and values of v , w , x , y , p , q , and r preferably are chosen such that at least 70% of the acetic acid, e.g., at least 80% or at least 90%, that is converted is converted to ethanol, while less than 4% of the acetic acid is converted to alkanes.

[0073] Accordingly, without being bound by theory, modification and stabilization of oxidic support materials for the catalysts of the present invention by incorporation of non-volatile support modifiers having either the effect of: counteracting acid sites present upon the support surface or the effect of thermally stabilizing the surface makes it possible to achieve desirable improvements in selectivity to ethanol, prolonged catalyst life, or both. In general, support modifiers based on oxides in their most stable valence state will have low vapor pressures and thus have low volatility or are rather non-volatile. Accordingly, it is preferred that the support modifiers are provided in amounts sufficient to: (i) counteract acidic sites present on the surface of the support material; (ii) impart resistance to shape change under hydrogenation temperatures; or (iii) both. Without being bound by theory, imparting resistance to shape change refers to imparting resistance, for example, to sintering, grain growth, grain boundary migration, migration of defects and dislocations, plastic deformation and/or other temperature induced changes in microstructure.

[0074] Catalysts of the present invention are particulate catalysts in the sense that, rather than being impregnated in a wash coat onto a monolithic carrier similar to automotive catalysts and diesel soot trap devices, the catalysts of the invention preferably are formed into particles, sometimes also referred to as beads or pellets, having any of a variety of shapes and the catalytic metals are provided to the reaction zone by placing a large number of these shaped catalysts in the reactor. Commonly encountered shapes include extrudates of arbitrary cross-section taking the form of a generalized cylinder in the sense that the generators defining the surface of the extrudate are parallel lines. As indicated above, any convenient particle shape including pellets, extrudates, spheres, spray dried microspheres, rings, pentarings, trilobes, quadrilobes and multi-lobal shapes may be used, although cylindrical pellets are preferred.

Typically, the shapes are chosen empirically based upon perceived ability to contact the vapor phase with the catalytic agents effectively.

[0075] One advantage of catalysts of the present invention is the stability or activity of the catalyst for producing ethanol. Accordingly, it can be appreciated that the catalysts of the present invention are fully capable of being used in commercial scale industrial applications for hydrogenation of acetic acid, particularly in the production of ethanol. In particular, it is possible to achieve such a degree of stability such that catalyst activity will have rate of productivity decline that is less than 6% per 100 hours of catalyst usage, e.g., less than 3% per 100 hours or less than 1.5% per 100 hours. Preferably, the rate of productivity decline is determined once the catalyst has achieved steady-state conditions.

[0076] In one embodiment, when the catalyst support comprises high purity silica, with calcium metasilicate as a support modifier, the catalyst activity may extend or stabilize, the productivity and selectivity of the catalyst for prolonged periods extending into over one week, over two weeks, and even months, of commercially viable operation in the presence of acetic acid vapor at temperatures of 125°C to 350°C at space velocities of greater than 2500 hr⁻¹.

[0077] The catalyst compositions of the invention preferably are formed through metal impregnation of the modified support, although other processes such as chemical vapor deposition may also be employed. Before the metals are impregnated, it typically is desired to form the modified support, for example, through a step of impregnating the support material with the support modifier. A precursor to the support modifier, such as an acetate or a nitrate, may be used. In one aspect, the support modifier, e.g., CaSiO₃, is added to the support material, e.g., SiO₂. For example, an aqueous suspension of the support modifier may be formed by adding the solid support modifier to deionized water, followed by the addition of colloidal support material thereto. The resulting mixture may be stirred and added to additional support material using, for example, incipient wetness techniques in which the support modifier is added to a support material having the same pore volume as the volume of the support modifier solution. Capillary action then draws the support modifier into the pores in the support material. The modified support can then be formed by drying and calcining to drive off water and any volatile components within the support modifier solution and depositing the support modifier on the support material. Drying may occur, for example, at a temperature of from 50°C to 300°C, e.g., from 100°C to 200°C or about 120°C, optionally for a period of from 1 to

24 hours, e.g., from 3 to 15 hours or from 6 to 12 hours. Once formed, the modified supports may be shaped into particles having the desired size distribution, e.g., to form particles having an average particle size in the range of from 0.2 to 0.4 cm. The supports may be extruded, pelletized, tabletized, pressed, crushed or sieved to the desired size distribution. Any of the known methods to shape the support materials into desired size distribution can be employed. Calcining of the shaped modified support may occur, for example, at a temperature of from 250°C to 800°C, e.g., from 300 to 700°C or about 500°C, optionally for a period of from 1 to 12 hours, e.g., from 2 to 10 hours, from 4 to 8 hours or about 6 hours.

[0078] In a preferred method of preparing the catalyst, the metals are impregnated onto the modified support. A precursor of the first metal (first metal precursor) preferably is used in the metal impregnation step, such as a water soluble compound or water dispersible compound/complex that includes the first metal of interest. Depending on the metal precursor employed, the use of a solvent, such as water, glacial acetic acid or an organic solvent, may be preferred. The second metal also preferably is impregnated into the modified support from a second metal precursor. If desired, a third metal or third metal precursor may also be impregnated into the modified support.

[0079] Impregnation occurs by adding, optionally drop wise, either or both the first metal precursor and/or the second metal precursor and/or additional metal precursors, preferably in suspension or solution, to the dry modified support. The resulting mixture may then be heated, e.g., optionally under vacuum, in order to remove the solvent. Additional drying and calcining may then be performed, optionally with ramped heating to form the final catalyst composition. Upon heating and/or the application of vacuum, the metal(s) of the metal precursor(s) preferably decompose into their elemental (or oxide) form. In some cases, the completion of removal of the liquid carrier, e.g., water, may not take place until the catalyst is placed into use and calcined, e.g., subjected to the high temperatures encountered during operation. During the calcination step, or at least during the initial phase of use of the catalyst, such compounds are converted into a catalytically active form of the metal or a catalytically active oxide thereof.

[0080] Impregnation of the first and second metals (and optional additional metals) into the modified support may occur simultaneously (co-impregnation) or sequentially. In simultaneous impregnation, the first and second metal precursors (and optionally additional metal precursors) are mixed together and added to the modified support together, followed by

drying and calcination to form the final catalyst composition. With simultaneous impregnation, it may be desired to employ a dispersion agent, surfactant, or solubilizing agent, e.g., ammonium oxalate, to facilitate the dispersing or solubilizing of the first and second metal precursors in the event the two precursors are incompatible with the desired solvent, e.g., water.

[0081] In sequential impregnation, the first metal precursor is first added to the modified support followed by drying and calcining, and the resulting material is then impregnated with the second metal precursor followed by an additional drying and calcining step to form the final catalyst composition. Additional metal precursors (e.g., a third metal precursor) may be added either with the first and/or second metal precursor or in a separate third impregnation step, followed by drying and calcination. Of course, combinations of sequential and simultaneous impregnation may be employed if desired.

[0082] Suitable metal precursors include, for example, metal halides, amine solubilized metal hydroxides, metal nitrates or metal oxalates. For example, suitable compounds for platinum precursors and palladium precursors include chloroplatinic acid, ammonium chloroplatinate, amine solubilized platinum hydroxide, platinum nitrate, platinum tetra ammonium nitrate, platinum chloride, platinum oxalate, palladium nitrate, palladium tetra ammonium nitrate, palladium chloride, palladium oxalate, sodium palladium chloride, and sodium platinum chloride. Generally, both from the point of view of economics and environmental aspects, aqueous solutions of soluble compounds of platinum are preferred. In one embodiment, the first metal precursor is not a metal halide and is substantially free of metal halides. Without being bound to theory, such non-(metal halide) precursors are believed to increase selectivity to ethanol. A particularly preferred precursor to platinum is platinum ammonium nitrate, $\text{Pt}(\text{NH}_3)_4(\text{NO}_3)_2$.

[0083] In one aspect, the “promoter” metal or metal precursor is first added to the modified support, followed by the “main” or “primary” metal or metal precursor. Of course the reverse order of addition is also possible. Exemplary precursors for promoter metals include metal halides, amine solubilized metal hydroxides, metal nitrates or metal oxalates. As indicated above, in the sequential embodiment, each impregnation step preferably is followed by drying and calcination. In the case of promoted bimetallic catalysts as described above, a sequential impregnation may be used, starting with the addition of the promoter metal followed by a

second impregnation step involving co-impregnation of the two principal metals, e.g., Pt and Sn.

[0084] As an example, PtSn/CaSiO₃ on SiO₂ may be prepared by a first impregnation of CaSiO₃ onto the SiO₂, followed by the co-impregnation with Pt(NH₃)₄(NO₃)₂ and Sn(AcO)₂. Again, each impregnation step may be followed by drying and calcination steps. In most cases, the impregnation may be carried out using metal nitrate solutions. However, various other soluble salts, which upon calcination release metal ions, can also be used. Examples of other suitable metal salts for impregnation include, metal acids, such as perrhenic acid solution, metal oxalates, and the like. In those cases where substantially pure ethanol is to be produced, it is generally preferable to avoid the use of halogenated precursors for the platinum group metals, using the nitrogenous amine and/or nitrate based precursors instead.

[0085] The process of hydrogenating acetic acid to form ethanol according to one embodiment of the invention may be conducted in a variety of configurations using a fixed bed reactor or a fluidized bed reactor as one of skill in the art will readily appreciate. In many embodiments of the present invention, an “adiabatic” reactor can be used; that is, there is little or no need for internal plumbing through the reaction zone to add or remove heat.

Alternatively, a shell and tube reactor provided with a heat transfer medium can be used. In many cases, the reaction zone may be housed in a single vessel or in a series of vessels with heat exchangers therebetween. It is considered significant that acetic acid reduction processes using the catalysts of the present invention may be carried out in adiabatic reactors as this reactor configuration is typically far less capital intensive than tube and shell configurations.

[0086] Typically, the catalyst is employed in a fixed bed reactor, e.g., in the shape of an elongated pipe or tube where the reactants, typically in the vapor form, are passed over or through the catalyst. Other reactors, such as fluid or ebullient bed reactors, can be employed, if desired. In some instances, the hydrogenation catalysts may be used in conjunction with an inert material to regulate the pressure drop of the reactant stream through the catalyst bed and the contact time of the reactant compounds with the catalyst particles.

[0087] The hydrogenation reaction may be carried out in either the liquid phase or vapor phase. Preferably the reaction is carried out in the vapor phase under the following conditions. The reaction temperature may be in the range from 125°C to 350°C, e.g., from 200°C to 325°C, from 225°C to about 300°C, or from 250°C to about 300°C. The pressure may range from 10

KPa to 3000 KPa (about 0.1 to 30 atmospheres), e.g., from 50 KPa to 2300 KPa, or from 100 KPa to 1500 KPa. The reactants may be fed to the reactor at a gas hourly space velocities (GHSV) of greater than 500 hr^{-1} , e.g., greater than 1000 hr^{-1} , greater than 2500 hr^{-1} and even greater than 5000 hr^{-1} . In terms of ranges the GHSV may range from 50 hr^{-1} to $50,000 \text{ hr}^{-1}$, e.g., from 500 hr^{-1} to $30,000 \text{ hr}^{-1}$, from 1000 hr^{-1} to $10,000 \text{ hr}^{-1}$, or from 1000 hr^{-1} to 6500 hr^{-1} .

[0088] The hydrogenation optionally is carried out at a pressure just sufficient to overcome the pressure drop across the catalytic bed at the GHSV selected, although there is no bar to the use of higher pressures, it being understood that considerable pressure drop through the reactor bed may be experienced at high space velocities, e.g., 5000 hr^{-1} or $6,500 \text{ hr}^{-1}$.

[0089] Although the reaction consumes two moles of hydrogen per mole of acetic acid to produce one mole of ethanol, the actual molar ratio of hydrogen to acetic acid in the feed stream may vary from about 100:1 to 1:100, e.g., from 50:1 to 1:50, from 20:1 to 1:2, or from 12:1 to 1:1. Most preferably, the molar ratio of hydrogen to acetic acid is greater than 4:1, e.g., greater than 5:1 or greater than 10:1.

[0090] Contact or residence time can also vary widely, depending upon such variables as amount of acetic acid, catalyst, reactor, temperature and pressure. Typical contact times range from a fraction of a second to more than several hours when a catalyst system other than a fixed bed is used, with preferred contact times, at least for vapor phase reactions, from 0.1 to 100 seconds, e.g., from 0.3 to 80 seconds or from 0.4 to 30 seconds.

[0091] The acetic acid may be vaporized at the reaction temperature, and then the vaporized acetic acid can be fed along with hydrogen in undiluted state or diluted with a relatively inert carrier gas, such as nitrogen, argon, helium, carbon dioxide and the like. For reactions run in the vapor phase, the temperature should be controlled in the system such that it does not fall below the dew point of acetic acid.

[0092] In particular, using catalysts of the present invention may achieve favorable conversion of acetic acid and favorable selectivity and productivity to ethanol. For purposes of the present invention, the term conversion refers to the amount of acetic acid in the feed that is convert to a compound other than acetic acid. Conversion is expressed as a mole percentage based on acetic acid in the feed.

[0093] The conversion of acetic acid (AcOH) is calculated from gas chromatography (GC) data using the following equation:

$$AcOH\ Conv. (\%) = 100 * \frac{mmol\ AcOH\ (feed\ stream) - mmol\ AcOH\ (GC)}{mmol\ AcOH\ (feed\ stream)}$$

[0094] For purposes of the present invention, the conversion may be at least 10%, e.g., at least 20%, at least 40%, at least 50%, at least 60%, at least 70% or at least 80%. Although catalysts that have high conversions are desirable, such as at least 80% or at least 90%, a low conversion may be acceptable at high selectivity for ethanol. It is, of course, well understood that in many cases, it is possible to compensate for conversion by appropriate recycle streams or use of larger reactors, but it is more difficult to compensate for poor selectivity.

[0095] “Selectivity” is expressed as a mole percent based on converted acetic acid. It should be understood that each compound converted from acetic acid has an independent selectivity and that selectivity is independent from conversion. For example, if 50 mole % of the converted acetic acid is converted to ethanol, we refer to the ethanol selectivity as 50%. Selectivity to ethanol (EtOH) is calculated from gas chromatography (GC) data using the following equation:

$$EtOH\ Sel. (\%) = 100 * \frac{mmol\ EtOH\ (GC)}{\frac{Total\ mmol\ C\ (GC)}{2} - mmol\ AcOH\ (feed\ stream)}$$

[0096] wherein “Total mmol C (GC)” refers to total mmols of carbon from all of the products analyzed by gas chromatograph.

[0097] For purposes of the present invention, the selectivity to ethoxylates of the catalyst is at least 60%, e.g., at least 70%, or at least 80%. As used herein, the term “ethoxylates” refers specifically to the compounds ethanol, acetaldehyde, and ethyl acetate. Preferably, the selectivity to ethanol is at least 80%, e.g., at least 85% or at least 88%. In embodiments of the present invention is also desirable to have low selectivity to undesirable products, such as methane, ethane, and carbon dioxide. The selectivity to these undesirable products is less than 4%, e.g., less than 2% or less than 1%. Preferably, no detectable amounts of these undesirable products are formed during hydrogenation. In several embodiments of the present invention, formation of alkanes is low, usually under 2%, often under 1%, and in many cases under 0.5%

of the acetic acid passed over the catalyst is converted to alkanes, which have little value other than as fuel.

[0098] Productivity refers to the grams of a specified product, e.g., ethanol, formed during the hydrogenation based on the kilogram of catalyst used per hour. In one embodiment of the present invention, a productivity of at least 200 grams of ethanol per kilogram catalyst per hour, e.g., at least 400 grams of ethanol or least 600 grams of ethanol, is preferred. In terms of ranges, the productivity preferably is from 200 to 3,000 grams of ethanol per kilogram catalyst per hour, e.g., from 400 to 2,500 or from 600 to 2,000.

[0099] Some catalysts of the present invention may achieve a conversion of acetic acid of at least 10%, a selectivity to ethanol of at least 80%, and a productivity of at least 200 g of ethanol per kg of catalyst per hour. A subset of catalysts of the invention may achieve a conversion of acetic acid of at least 50%, a selectivity to ethanol of at least 80%, a selectivity to undesirable compounds of less than 4%, and a productivity of at least 600 g of ethanol per kg of catalyst per hour.

[0100] The crude ethanol product produced by hydrogenation processes employing the catalysts of the present invention, before any subsequent processing, such as purification and separation, typically will comprise primarily unreacted acetic acid and ethanol. In some exemplary embodiments, the crude ethanol product comprises ethanol in an amount from 15 wt.% to 70 wt.%, e.g., from 20 wt.% to 50 wt.%, or from 25 wt.% to 50 wt.%, based on the total weight of the crude ethanol product. Preferably, the crude ethanol product contains at least 22 wt.% ethanol, at least 28 wt.% ethanol or at least 44 wt.% ethanol. The crude ethanol product typically will further comprise unreacted acetic acid, depending on conversion, for example, in an amount from 0 to 80 wt.%, e.g., from 5 to 80 wt.%, from 20 to 70 wt.%, from 28 to 70 wt.% or from 44 to 65 wt.%. Since water is formed in the reaction process, water will also be present in the crude ethanol product, for example, in amounts ranging from 5 to 30 wt.%, e.g., from 10 to 30 wt.% or from 10 to 26 wt.%. Other components, such as, for example, esters, ethers, aldehydes, ketones, alkanes, and carbon dioxide, if detectable, collectively may be present in amounts less than 10 wt.%, e.g., less than 6 or less than 4 wt.%. In terms of ranges other components may be present in an amount from 0.1 to 10 wt.%, e.g., from 0.1 to 6 wt.%, or from 0.1 to 4 wt.%. Thus, exemplary crude ethanol compositional ranges are provided below in Table 2.

TABLE 2
CRUDE ETHANOL PRODUCT COMPOSITIONS

Component	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
Ethanol	15-70	15-70	20-50	25-50
Acetic Acid	5-80	20-70	28-70	44-65
Water	5-30	5-30	10-30	10-26
Other	<10	<10	<6	<4

[0101] In one aspect, the crude ethanol product is formed over a platinum/tin catalyst on a modified silica support, e.g., modified with CaSiO_3 . Depending on the specific catalyst and process conditions employed, the crude ethanol product may have any of the compositions indicated below in Table 3.

TABLE 3
CRUDE ETHANOL PRODUCT COMPOSITIONS

Component	Comp. A Conc. (wt.%)	Comp. B Conc. (wt.%)	Comp. C Conc. (wt.%)
Ethanol	17	26	45
Acetic Acid	74	53	20
Water	7	13	25
Other	2	8	10


[0102] The raw materials used in the hydrogenation process may be derived from any suitable source including natural gas, petroleum, coal, biomass and so forth. It is well known to produce acetic acid through methanol carbonylation, acetaldehyde oxidation, ethylene oxidation, oxidative fermentation, and anaerobic fermentation. As petroleum and natural gas prices fluctuate becoming either more or less expensive, methods for producing acetic acid and intermediates such as methanol and carbon monoxide from alternate carbon sources have drawn increasing interest. In particular, when petroleum is relatively expensive compared to natural gas, it may become advantageous to produce acetic acid from synthesis gas ("syn gas") that is derived from any available carbon source. United States Patent No. 6,232,352 to *Vidalin*, the disclosure of which is incorporated herein by reference, for example, teaches a method of retrofitting a methanol plant for the manufacture of acetic acid. By retrofitting a methanol plant, the large capital costs associated with CO generation for a new acetic acid plant

are significantly reduced or largely eliminated. All or part of the syn gas is diverted from the methanol synthesis loop and supplied to a separator unit to recover CO and hydrogen, which are then used to produce acetic acid. In addition to acetic acid, the process can also be used to make hydrogen which may be utilized in connection with this invention.

[0103] United States Patent No. RE 35,377 to *Steinberg et al.*, also incorporated herein by reference, provides a method for the production of methanol by conversion of carbonaceous materials such as oil, coal, natural gas and biomass materials. The process includes hydrogasification of solid and/or liquid carbonaceous materials to obtain a process gas which is steam pyrolyzed with additional natural gas to form synthesis gas. The syn gas is converted to methanol which may be carbonylated to acetic acid. The method likewise produces hydrogen which may be used in connection with this invention as noted above. *See also*, United States Patent No. 5,821,111 to *Grady et al.*, which discloses a process for converting waste biomass through gasification into synthesis gas as well as United States Patent No. 6,685,754 to *Kindig et al.*, the disclosures of which are incorporated herein by reference.

[0104] Alternatively, acetic acid in vapor form may be taken directly as crude product from the flash vessel of a methanol carbonylation unit of the class described in United States Patent No. 6,657,078 to *Scates et al.*, the entirety of which is incorporated herein by reference. The crude vapor product, for example, may be fed directly to the ethanol synthesis reaction zones of the present invention without the need for condensing the acetic acid and light ends or removing water, saving overall processing costs.

[0105] Ethanol obtained from hydrogenation processes using the catalysts of the invention may be used in its own right as a fuel or subsequently converted to ethylene which is an important commodity feedstock as it can be converted to polyethylene, vinyl acetate and/or ethyl acetate or any of a wide variety of other chemical products. For example, ethylene can also be converted to numerous polymer and monomer products. The dehydration of ethanol to ethylene is shown below.



[0106] Any of known dehydration catalysts can be employed in to dehydrate ethanol, such as those described in copending applications U.S. Application No. 12/221,137 and U.S. Application No. 12/221,138, the entire contents and disclosures of which are hereby

incorporated by reference. A zeolite catalyst, for example, may be employed as the dehydration catalyst. While any zeolite having a pore diameter of at least about 0.6 nm can be used, preferred zeolites include dehydration catalysts selected from the group consisting of mordenites, ZSM-5, a zeolite X and a zeolite Y. Zeolite X is described, for example, in U.S. Pat. No. 2,882,244 and zeolite Y in U.S. Pat. No. 3,130,007, the entireties of which are hereby incorporated by reference.

[0107] Ethanol may also be used as a fuel, in pharmaceutical products, cleansers, sanitizers, hydrogenation transport or consumption. Ethanol may also be used as a source material for making ethyl acetate, aldehydes, and higher alcohols, especially butanol. In addition, any ester, such as ethyl acetate, formed during the process of making ethanol according to the present invention may be further reacted with an acid catalyst to form additional ethanol as well as acetic acid, which may be recycled to the hydrogenation process.

[0108] The invention is described in detail below with reference to numerous embodiments for purposes of exemplification and illustration only. Modifications to particular embodiments within the spirit and scope of the present invention, set forth in the appended claims, will be readily apparent to those of skill in the art.

[0109] The following examples describe the procedures used for the preparation of various catalysts employed in the process of this invention.

Examples

Catalyst Preparations (general)

[0110] The catalyst supports were dried at 120°C overnight under circulating air prior to use. All commercial supports (i.e., SiO₂, ZrO₂) were used as a 14/30 mesh, or in its original shape (1/16 inch or 1/8 inch pellets) unless mentioned otherwise. Powdered materials (i.e., CaSiO₃) were pelletized, crushed and sieved after the metals had been added. The individual catalyst preparations are described in detail below.

Example 1 – SiO₂-CaSiO₃(5)-Pt(3)-Sn(1.8) Catalyst

[0111] The catalyst was prepared by first adding CaSiO₃ (Aldrich) to the SiO₂ catalyst support, followed by the addition of Pt/Sn. First, an aqueous suspension of CaSiO₃ (≤ 200 mesh) was prepared by adding 0.52 g of the solid to 13 ml of deionized H₂O, followed by the addition of 1.0 ml of colloidal SiO₂ (15 wt.% solution, NALCO). The suspension was stirred for 2 hours at room temperature and then added to 10.0 g of SiO₂ catalyst support (14/30 mesh)

using incipient wetness technique. After standing for 2 hours, the material was evaporated to dryness, followed by drying at 120°C overnight under circulating air and calcination at 500°C for 6 hours. All of the SiO₂-CaSiO₃ material was then used for Pt/Sn metal impregnation.

[0112] The catalysts were prepared by first adding Sn(OAc)₂ (tin acetate, Sn(OAc)₂ from Aldrich) (0.4104 g, 1.73 mmol) to a vial containing 6.75 ml of 1:1 diluted glacial acetic acid (Fisher). The mixture was stirred for 15 min at room temperature, and then, 0.6711 g (1.73 mmol) of solid Pt(NH₃)₄(NO₃)₂ (Aldrich) were added. The mixture was stirred for another 15 min at room temperature, and then added drop wise to 5.0 g of SiO₂-CaSiO₃ support, in a 100 ml round-bottomed flask. The metal solution was stirred continuously until all of the Pt/Sn mixture had been added to the SiO₂-CaSiO₃ support while rotating the flask after every addition of metal solution. After completing the addition of the metal solution, the flask containing the impregnated catalyst was left standing at room temperature for two hours. The flask was then attached to a rotor evaporator (bath temperature 80°C), and evacuated until dried while slowly rotating the flask. The material was then dried further overnight at 120°C, and then calcined using the following temperature program: 25→160°C/ramp 5.0 deg/min; hold for 2.0 hours; 160→500°C/ramp 2.0 deg/min; hold for 4 hours. Yield: 11.21 g of dark grey material.

Example 2 – KA160-CaSiO₃(8)-Pt(3)-Sn(1.8)

[0113] The material was prepared by first adding CaSiO₃ to the KA160 catalyst support (SiO₂-(0.05) Al₂O₃, Sud Chemie, 14/30 mesh), followed by the addition of Pt/Sn. First, an aqueous suspension of CaSiO₃ (≤ 200 mesh) was prepared by adding 0.42 g of the solid to 3.85 ml of deionized H₂O, followed by the addition of 0.8 ml of colloidal SiO₂ (15 wt.% solution, NALCO). The suspension was stirred for 2 hours at room temperature and then added to 5.0 g of KA160 catalyst support (14/30 mesh) using incipient wetness technique. After standing for 2 hours, the material was evaporated to dryness, followed by drying at 120°C overnight under circulating air and calcinations at 500°C for 6 hours. All of the KA160-CaSiO₃ material was then used for Pt/Sn metal impregnation.

[0114] The catalysts were prepared by first adding Sn(OAc)₂ (tin acetate, Sn(OAc)₂ from Aldrich) (0.2040 g, 0.86 mmol) to a vial containing 6.75 ml of 1:1 diluted glacial acetic acid (Fisher). The mixture was stirred for 15 min at room temperature, and then, 0.3350 g (0.86 mmol) of solid Pt(NH₃)₄(NO₃)₂ (Aldrich) were added. The mixture was stirred for another 15 min at room temperature, and then added drop wise to 5.0 g of SiO₂-CaSiO₃ support, in a 100

ml round-bottomed flask. After completing the addition of the metal solution, the flask containing the impregnated catalyst was left standing at room temperature for two hours. The flask was then attached to a rotor evaporator (bath temperature 80°C), and evacuated until dried while slowly rotating the flask. The material was then dried further overnight at 120°C, and then calcined using the following temperature program: 25→160°C/ramp 5.0 deg/min; hold for 2.0 hours; 160→500°C/ramp 2.0 deg/min; hold for 4 hours. Yield: 5.19 g of tan-colored material.

Example 3 - SiO₂-CaSiO₃(2.5)-Pt(1.5)-Sn(0.9)

[0115] This catalyst was prepared in the same manner as Example 1, with the following starting materials: 0.26 g of CaSiO₃ as a support modifier; 0.5 ml of colloidal SiO₂ (15 wt.% solution, NALCO), 0.3355 g (0.86 mmol) of Pt(NH₃)₄(NO₃)₂; and 0.2052 g (0.86 mmol) of Sn(OAc)₂. Yield: 10.90 g of dark grey material.

Example 4 - SiO₂ + MgSiO₃-Pt(1.0)-Sn(1.0)

[0116] This catalyst was prepared in the same manner as Example 1, with the following starting materials: 0.69 g of Mg(AcO) as a support modifier; 1.3 g of colloidal SiO₂ (15 wt.% solution, NALCO), 0.2680 g (0.86 mmol) of Pt(NH₃)₄(NO₃)₂; and 0.1640 g (0.86 mmol) of Sn(OAc)₂. Yield: 8.35 g. The SiO₂ support was impregnated with a solution of Mg(AcO) and colloidal SiO₂. The support was dried and then calcined to 700°C.

Example 5 - SiO₂-CaSiO₃(5)-Re(4.5)-Pd(1)

[0117] The SiO₂-CaSiO₃(5) modified catalyst support was prepared as described in Example 1. The Re/Pd catalyst was prepared then by impregnating the SiO₂-CaSiO₃(5) (1/16 inch extrudates) with an aqueous solution containing NH₄ReO₄ and Pd(NO₃)₂. The metal solutions were prepared by first adding NH₄ReO₄ (0.7237 g, 2.70 mmol) to a vial containing 12.0 ml of deionized H₂O. The mixture was stirred for 15 min at room temperature, and 0.1756 g (0.76 mmol) of solid Pd(NO₃)₂ was then added. The mixture was stirred for another 15 min at room temperature, and then added drop wise to 10.0 g of dry SiO₂-(0.05)CaSiO₃ catalyst support in a 100 ml round-bottomed flask. After completing the addition of the metal solution, the flask containing the impregnated catalyst was left standing at room temperature for two hours. All other manipulations (drying, calcination) were carried out as described in Example 1. Yield: 10.9 g of brown material.

Example 6 – SiO₂-ZnO(5)-Pt(1)-Sn(1)

[0118] Powdered and meshed high surface area silica NPSG SS61138 (100 g) of uniform particle size distribution of about 0.2 mm was dried at 120°C in a circulating air oven atmosphere overnight and then cooled to room temperature. To this was added a solution of zinc nitrate hexahydrate. The resulting slurry was dried in an oven gradually heated to 110°C (>2 hours, 10°C/min.) then calcined. To this was added a solution of platinum nitrate (Chempur) in distilled water and a solution of tin oxalate (Alfa Aesar) (1.74 g) in dilute nitric acid (1N, 8.5 ml) The resulting slurry was dried in an oven gradually heated to 110°C (>2 hours, 10°C/min.). The impregnated catalyst mixture was then calcined at 500°C (6 hours, 1°C/min).

[0119] In addition, the following comparative catalysts were also prepared.

Example 7 – Comparative

[0120] TiO₂-CaSiO₃(5)-Pt(3)-Sn(1.8). The material was prepared by first adding CaSiO₃ to the TiO₂ catalyst (Anatase, 14/30 mesh) support, followed by the addition of Pt/Sn as described in Example 1. First, an aqueous suspension of CaSiO₃ (≤ 200 mesh) was prepared by adding 0.52 g of the solid to 7.0 ml of deionized H₂O, followed by the addition of 1.0 ml of colloidal SiO₂ (15 wt.% solution, NALCO). The suspension was stirred for 2 h at room temperature and then added to 10.0 g of TiO₂ catalyst support (14/30 mesh) using incipient wetness technique. After standing for 2 hours, the material was evaporated to dryness, followed by drying at 120°C overnight under circulating air and calcination at 500°C for 6 hours. All of the TiO₂-CaSiO₃ material was then used for Pt/Sn metal impregnation using 0.6711 g (1.73 mmol) of Pt(NH₃)₄(NO₃)₂ and 0.4104 g (1.73 mmol) of Sn(OAc)₂ following the procedure described in Example 1. Yield: 11.5 g of light grey material.

Example 8 – Comparative

[0121] Sn(0.5) on High Purity Low Surface Area Silica. Powdered and meshed high purity low surface area silica (100 g) of uniform particle size distribution of about 0.2 mm was dried at 120°C in an oven under nitrogen atmosphere overnight and then cooled to room temperature. To this was added a solution of tin oxalate (Alfa Aesar) (1.74 g) in dilute nitric acid (1N, 8.5 ml). The resulting slurry was dried in an oven gradually heated to 110°C (>2 hours, 10°C/min.). The impregnated catalyst mixture was then calcined at 500°C (6 hours, 1°C/min).

Example 9 – Comparative

[0122] Pt(2)-Sn(2) on High Surface Area Silica. Powdered and meshed high surface area silica NPSG SS61138 (100 g) of uniform particle size distribution of about 0.2 mm was dried at 120°C in a circulating air oven atmosphere overnight and then cooled to room temperature. To this was added a solution of nitrate hexahydrate (Chempur). The resulting slurry was dried in an oven gradually heated to 110°C (>2 hours, 10°C/min.) then calcined. To this was added a solution of platinum nitrate (Chempur) in distilled water and a solution of tin oxalate (Alfa Aesar) in dilute nitric acid. The resulting slurry was dried in an oven gradually heated to 110°C (>2 hours, 10°C/min.). The impregnated catalyst mixture was then calcined at 500°C (6 hours, 1°C/min).

Example 10 – Comparative

[0123] KA160-Pt(3)-Sn(1.8). The material was prepared by incipient wetness impregnation of KA160 catalyst support (SiO_2 -(0.05) Al_2O_3 , Sud Chemie, 14/30 mesh) as described in Example 16. The metal solutions were prepared by first adding $\text{Sn}(\text{OAc})_2$ (0.2040 g, 0.86 mmol) to a vial containing 4.75 mL of 1:1 diluted glacial acetic acid. The mixture was stirred for 15 min at room temperature, and then, 0.3350 g (0.86 mmol) of solid $\text{Pt}(\text{NH}_3)_4(\text{NO}_3)_2$ were added. The mixture was stirred for another 15 min at room temperature, and then added drop wise to 5.0 g of dry KA160 catalyst support (14/30 mesh) in a 100 ml round-bottomed flask. All other manipulations, drying and calcination was carried out as described in Example 16. Yield: 5.23 g of tan-colored material.

Example 11 – Comparative

[0124] SiO_2 - SnO_2 (5)-Pt(1)-Zn(1). Powdered and meshed high surface area silica NPSG SS61138 (100 g) of uniform particle size distribution of about 0.2 mm was dried at 120°C in a circulating air oven atmosphere overnight and then cooled to room temperature. To this was added a solution of tin acetate ($\text{Sn}(\text{OAc})_2$). The resulting slurry was dried in an oven gradually heated to 110°C (>2 hours, 10°C/min.) then calcined. To this was added a solution of platinum nitrate (Chempur) in distilled water and a solution of tin oxalate (Alfa Aesar) in dilute nitric acid. The resulting slurry was dried in an oven gradually heated to 110°C (>2 hours, 10°C/min.). The impregnated catalyst mixture was then calcined at 500°C (6 hours, 1°C/min).

Example 12 – Comparative

[0125] SiO₂-TiO₂(10)-Pt(3)-Sn(1.8). The TiO₂-modified silica support was prepared as follows. A solution of 4.15 g (14.6 mmol) of Ti{OCH(CH₃)₂}₄ in 2-propanol (14 ml) was added dropwise to 10.0 g of SiO₂ catalyst support (1/16 inch extrudates) in a 100 ml round-bottomed flask. The flask was left standing for two hours at room temperature, and then evacuated to dryness using a rotor evaporator (bath temperature 80°C). Next, 20 ml of deionized H₂O was slowly added to the flask, and the material was left standing for 15 min. The resulting water/2-propanol was then removed by filtration, and the addition of H₂O was repeated two more times. The final material was dried at 120°C overnight under circulation air, followed by calcination at 500°C for 6 hours. All of the SiO₂-TiO₂ material was then used for Pt/Sn metal impregnation using 0.6711 g (1.73 mmol) of Pt(NH₃)₄(NO₃)₂ and 0.4104 g (1.73 mmol) of Sn(OAc)₂ following the procedure described above for Example 1. Yield: 11.98 g of dark grey 1/16 inch extrudates.

Example 13 – Comparative

[0126] SiO₂-WO₃(10)-Pt(3)-Sn(1.8). The WO₃-modified silica support was prepared as follows. A solution of 1.24 g (0.42 mmol) of (NH₄)₆H₂W₁₂O₄₀ · n H₂O, (AMT) in deionized H₂O (14 ml) was added dropwise to 10.0 g of SiO₂ NPSGSS 61138 catalyst support (SA = 250 m²/g, 1/16 inch extrudates) in a 100 ml round-bottomed flask. The flask was left standing for two hours at room temperature, and then evacuated to dryness using a rotor evaporator (bath temperature 80°C). The resulting material was dried at 120°C overnight under circulation air, followed by calcination at 500°C for 6 hours. All of the (light yellow) SiO₂-WO₃ material was then used for Pt/Sn metal impregnation using 0.6711 g (1.73 mmol) of Pt(NH₃)₄(NO₃)₂ and 0.4104 g (1.73 mmol) of Sn(OAc)₂ following the procedure described above for Example 1. Yield: 12.10 g of dark grey 1/16 inch extrudates.

Example 14 – Hydrogenation of Acetic Acid over Catalysts from Examples 1-13 and Gas Chromatographic (GC) Analysis of the Crude Ethanol Product

[0127] Catalyst of Examples 1-13 were tested to determine the selectivity and productivity to ethanol as shown in Table 4.

[0128] The reaction feed liquid of acetic acid was evaporated and charged to the reactor along with hydrogen and helium as a carrier gas with an average combined gas hourly space

velocity (GHSV), temperature, and pressure as indicated in Table 4. The feed stream contained a mole ratio hydrogen to acetic acid as indicated in Table 4.

[0129] The analysis of the products (crude ethanol composition) was carried out by online GC. A three channel compact GC equipped with one flame ionization detector (FID) and 2 thermal conducting detectors (TCDs) was used to analyze the reactants and products. The front channel was equipped with an FID and a CP-Sil 5 (20 m) + WaxFFap (5 m) column and was used to quantify: Acetaldehyde; Ethanol; Acetone; Methyl acetate; Vinyl acetate; Ethyl acetate; Acetic acid; Ethylene glycol diacetate; Ethylene glycol; Ethylidene diacetate; and Paraldehyde. The middle channel was equipped with a TCD and Porabond Q column and was used to quantify: CO₂; ethylene; and ethane. The back channel was equipped with a TCD and Molsieve 5A column and was used to quantify: Helium; Hydrogen; Nitrogen; Methane; and Carbon monoxide.

[0130] Prior to reactions, the retention times of the different components were determined by spiking with individual compounds and the GCs were calibrated either with a calibration gas of known composition or with liquid solutions of known compositions. This allowed the determination of the response factors for the various components.

Table 4

Table 4								
Cat. Ex.	Cat.	Reaction Conditions			GHSV (hr ⁻¹)	Conv. of AcOH (%)	Selectivity (%)	
		Ratio of H ₂ :AcOH	Press. (KPa)	Temp. (°C)			EtOAc	EtOH
Inventive								
1	SiO ₂ -CaSiO ₃ (5)-Pt(3)-Sn(1.8)	5:1	2200	250	2500	24	6	92
2	KA160-CaSiO ₃ (8)-Pt(3)-Sn(1.8)	5:1	2200	250	2500	43	13	84
3	SiO ₂ -CaSiO ₃ (2.5)-Pt(1.5)-Sn(0.9)	10:1	1400	250	2500	26	8	86
4	SiO ₂ + MgSiO ₃ -Pt(1.0)-Sn(1.0)	4:1	1400	250	6570	22	10	88
5	SiO ₂ -CaSiO ₃ (5)-Re(4.5)-Pd(1)	5:1	1400	250	6570	8	17	83
6	SiO ₂ -ZnO(5)-Pt(1)-Sn(1)	4:1	1400	275	6570	22	21	76
Comparative								
7	TiO ₂ -CaSiO ₃ (5)-Pt(3)-Sn(1.8)	5:1	1400	250	6570	38	78	22
8	Sn(0.5) on SiO ₂	9:1~8:1	2200	250	2500	10		1
9	Pt(2)-Sn(2) on SiO ₂	5:1	1400	296	6570	34	64	33
9	Pt(2)-Sn(2) on SiO ₂	5:1	1400	280	6570	37	62	36
9	Pt(2)-Sn(2) on SiO ₂	5:1	1400	250	6570	26	63	36
9	Pt(2)-Sn(2) on SiO ₂	5:1	1400	225	6570	11	57	42
10	KA160-Pt(3)-Sn(1.8)	5:1	2200	250	2500	61	50	47
11	SiO ₂ -SnO ₂ (5)-Pt(1)-Zn(1)	4:1	1400	275	6570	13	44	48
12	SiO ₂ -TiO ₂ (10)-Pt(3)-Sn(1.8)	5:1	1400	250	6570	73	53	47
13	SiO ₂ -WO ₃ (10)-Pt(3)-Sn(1.8)	5:1	1400	250	6570	17	23	77

Example 15 – Catalyst Stability (15 hours)

[0131] Vaporized acetic acid and hydrogen were passed over a hydrogenation catalyst of the present invention comprising 3 wt.% Pt, 1.5 wt.% Sn and 5 wt.% CaSiO_3 , as a promoter on high purity, high surface area silica having a surface area of approximately $250 \text{ m}^2/\text{g}$ at a molar ratio of hydrogen to acetic acid of about 5:1 (feed rate of 0.09 g/min HOAc ; 160 sccm/min H_2 ; 60 sccm/min N_2) at a temperature of about 225°C , pressure of 200 psig (about 1400 KPag), and $\text{GHSV} = 6570 \text{ h}^{-1}$. SiO_2 stabilized with 5% CaSiO_3 in hydrogenation of acetic acid was studied in a run of 15 hours duration at 225°C using a fixed bed continuous reactor system to produce mainly ethanol, acetaldehyde, and ethyl acetate through hydrogenation and esterification reactions in a typical range of operating conditions employing 2.5 ml solid catalyst (14/30 mesh, diluted 1:1 (v/v, with quartz chips, 14/30 mesh). FIG. 3A illustrates the selectivity, and FIG. 3B illustrates the productivity of the catalysts as a function of time on-stream during the initial portion of the catalysts life. From the results of this example as reported in FIG. 3A and FIG. 3B, it can be appreciated that it is possible to attain a selectivity of over 90% and productivity of over 500 g of ethanol per kilogram of catalyst per hour.

Example 16 – Catalyst Stability (over 100 hours)

[0132] Catalyst Stability: $\text{SiO}_2\text{-CaSiO}_3(5)\text{-Pt}(3)\text{-Sn}(1.8)$. The catalytic performance and initial stability of $\text{SiO}_2\text{-CaSiO}_3(5)\text{-Pt}(3)\text{-Sn}(1.8)$ was evaluated at constant temperature (260°C) over 100 hrs of reaction time. Only small changes in catalyst performance and selectivity were observed over the 100 hrs of total reaction time. Acetaldehyde appeared to be the only side product, and its concentration ($\sim 3 \text{ wt.}\%$) remained largely unchanged over the course of the experiment. A summary of catalyst productivity and selectivity is provided in FIGS. 4A and 4B.

Example 17 – Catalyst Stability

[0133] The procedure of Example 16 was repeated at a temperature of about 250°C . FIGS. 5A and 5B illustrate the productivity and selectivity of the catalysts as a function of time on-stream during the initial portion of the catalysts life. From the results of this example, as reported in FIGS. 5A and 5B, it can be appreciated, that it is still possible to attain a selectivity activity of over 90% but with productivity of over 800 g of ethanol per kilogram of catalyst per hour at this temperature.

Example 18

[0134] The catalyst of Example 3 was prepared with different loadings of support modifier, CaSiO_3 , and produced the following catalysts: (i) $\text{SiO}_2\text{-Pt(1.5)-Sn(0.9)}$; (ii) $\text{SiO}_2\text{-CaSiO}_3(2.5)\text{-Pt(1.5)-Sn(0.9)}$; (iii) $\text{SiO}_2\text{-CaSiO}_3(5.0)\text{-Pt(1.5)-Sn(0.9)}$; (iv) $\text{SiO}_2\text{-CaSiO}_3(7.5)\text{-Pt(1.5)-Sn(0.9)}$; and (v) $\text{SiO}_2\text{-CaSiO}_3(10)\text{-Pt(1.5)-Sn(0.9)}$. Each catalyst was used in hydrogenating acetic acid at 250°C and 275°C under similar conditions, i.e., 1400 bar (200 psig) and a 10:1 hydrogen to acetic acid molar feed ratio, (683 sccm/min of H_2 to 0.183 g/min AcOH). The conversion is shown in FIG. 6A, productivity in FIG. 6B, selectivity at 250°C in FIG. 6C and selectivity at 275°C in FIG. 6D.

[0135] As shown in FIG. 6A, the conversion of acetic acid at 250°C and 275°C surprisingly increased at CaSiO_3 loadings greater than 2.5 wt.%. The initial drop in conversion exhibited from 0 to 2.5 wt.% CaSiO_3 would suggest that conversion would be expected to decrease as more CaSiO_3 is added. This trend, however, surprisingly reserves as more support modifier is added. Increasing conversion also results in increased productivity, as shown in FIG. 6B. The selectivities in FIG. 6C and 6C show a slight increase as the amount of support modifier increases.

[0136] While the invention has been described in detail, modifications within the spirit and scope of the invention will be readily apparent to those of skill in the art. In view of the foregoing discussion, relevant knowledge in the art and references discussed above in connection with the Background and Detailed Description, the disclosures of which are all incorporated herein by reference. In addition, it should be understood that aspects of the invention and portions of various embodiments and various features recited below and/or in the appended claims may be combined or interchanged either in whole or in part. In the foregoing descriptions of the various embodiments, those embodiments which refer to another embodiment may be appropriately combined with other embodiments as will be appreciated by one of skill in the art. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention.

We claim:

1. A catalyst comprising a first metal, a siliceous support, and at least one metasilicate support modifier.
2. The catalyst of claim 1, wherein the at least one metasilicate support modifier is selected from the group consisting of (i) alkaline earth metal metasilicates, (ii) alkali metal metasilicates, (iii) Group IIB metal metasilicates, (iv) Group IIIB metal metasilicates, and mixtures thereof.
3. The catalyst of claim 1, wherein the first metal is selected from the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten.
4. The catalyst of claim 1, wherein the first metal is present in an amount of from 0.1 to 25 wt.%, based on the total weight of the catalyst.
5. The catalyst of claim 1, wherein the at least one metasilicate support modifier is selected from metasilicates of a metal selected from the group consisting of sodium, potassium, magnesium, scandium, yttrium, and zinc.
6. The catalyst of claim 1, wherein the at least one metasilicate support modifier comprises CaSiO_3 .
7. The catalyst of claim 1, wherein the at least one metasilicate support modifier is present in an amount of 0.1 wt.% to 50 wt.%, based on the total weight of the catalyst.
8. The catalyst of claim 1, wherein the siliceous support is present in an amount of 25 wt.% to 99 wt.%, based on the total weight of the catalyst.
9. The catalyst of claim 1, wherein the siliceous support has a surface area of from 50 m^2/g to 600 m^2/g .

10. The catalyst of claim 1, wherein the siliceous support is selected from the group consisting of silica, silica/alumina, calcium metasilicate, pyrogenic silica, high purity silica and mixtures thereof.
11. The catalyst of claim 10, wherein the siliceous support contains less than 1 wt.% of aluminum, based on the total weight of the catalyst.
12. The catalyst of claim 1, wherein the first metal is selected from the group consisting of Group IB, IIB, IIIB, IVB, VB, VIB, VIIB, or VIII transitional metal, a lanthanide metal, an actinide metal or a metal from any of Groups IIIA, IVA, VA, or VIA.
13. The catalyst of claim 12, further comprising a second metal different from the first metal.
14. The catalyst of claim 13, wherein the first metal is platinum and the second metal is tin.
15. The catalyst of claim 14, wherein the molar ratio of platinum to tin is from 0.4:0.6 to 0.6:0.4.
16. The catalyst of claim 13, wherein the first metal is palladium and the second metal is rhenium.
17. The catalyst of claim 16, wherein the molar ratio of rhenium to palladium is from 0.7:0.3 to 0.85:0.15.
18. The catalyst of claim 13, wherein the second metal is selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, ruthenium, rhenium, gold, and nickel.

19. The catalyst of claim 13, wherein the second metal is present in an amount of from 0.1 to 10 wt.%, based on the total weight of the catalyst.
20. The catalyst of claim 13, wherein the catalyst further comprises a third metal different from the first metal and the second metal.
21. The catalyst of claim 20, wherein the third metal is selected from the group consisting of cobalt, palladium, ruthenium, copper, zinc, platinum, tin, and rhenium.
22. The catalyst of claim 20, wherein the third metal is present in an amount of 0.05 and 4 wt.%, based on the total weight of the catalyst.
23. The catalyst of claim 1, wherein the catalyst is suitable for use as a hydrogenation catalyst in converting acetic acid to ethanol and yields an acetic acid conversion of at least 10%.
24. The catalyst of claim 23, wherein the catalyst has a selectivity to ethanol of at least 80%.
25. The catalyst of claim 24, wherein the catalyst has a selectivity to methane, ethane, and carbon dioxide of less than 4%.
26. The catalyst of claim 24, wherein the catalyst has a productivity that decreases less than 6% per 100 hours of catalyst usage.
27. A catalyst satisfying the formula:



wherein:

- (i) the ratio of $v:y$ is between 3:2 and 2:3, and/or (ii) the ratio of $w:x$ is between 1:3 and 1:5; and

p and q are selected such that $p:q$ is from 1:20 to 1:200 with r being selected to satisfy valence requirements and v and w being selected such that:

$$0.005 \leq \frac{(3.25v + 1.75w)}{q} \leq 0.05.$$

28. The catalyst of claim 27, wherein the ratio of $v:y$ is between 3:2 and 2:3.

29. The catalyst of claim 27, wherein the ratio of $w:x$ is between 1:3 and 1:5.

30. A catalyst satisfying the formula:



wherein:

(i) v and y are between 3:2 and 2:3; and/or (ii) w and x are between 1:3 and 1:5;

and

p and z and the relative locations of aluminum and calcium atoms present are controlled such that Brønsted acid sites present upon the surface thereof are balanced by a support modifier; and

p and q are selected such that $p:q$ is from 1:20 to 1:200 with r being selected to satisfy valence requirements, and

v and w are selected such that:

$$0.005 \leq \frac{(3.25v + 1.75w)}{q} \leq 0.05.$$

31. The catalyst of claim 30, wherein the ratio of $v:y$ is between 3:2 and 2:3.

32. The catalyst of claim 30, wherein the ratio of $w:x$ is between 1:3 and 1:5.

33. The catalyst of claim 30, wherein the at least one support modifier is selected from the group consisting of (i) alkaline earth metal oxides, (ii) alkali metal oxides, (iii) alkaline earth metal metasilicates, (iv) alkali metal metasilicates, (v) Group IIB metal oxides,

- (vi) Group IIB metal metasilicates, (vii) Group IIIB metal oxides, (viii) Group IIIB metal metasilicates, and mixtures thereof.
34. A catalyst, comprising a first metal, a second metal, a siliceous support, and at least one support modifier, the first metal being selected from the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten, and the second metal being selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, rhenium, and nickel, wherein the second metal is different than the first metal.
35. The catalyst of claim 34, wherein the at least one support modifier is selected from the group consisting of (i) alkaline earth metal metasilicates, (ii) alkali metal metasilicates, (iii) Group IIB metal metasilicates, (iv) Group IIIB metal metasilicates, and mixtures thereof.
36. The catalyst of claim 34, wherein the first metal is present in an amount of from 0.1 to 25 wt.%, based on the total weight of the catalyst.
37. The catalyst of claim 34, wherein the at least one support modifier is selected from metasilicates of a metal selected from the group consisting of sodium, potassium, magnesium, scandium, yttrium, and zinc.
38. The catalyst of claim 34, wherein the at least one support modifier comprises CaSiO_3 .
39. The catalyst of claim 34, wherein the at least one support modifier is present in an amount of 0.1 wt.% to 50 wt.%, based on the total weight of the catalyst.
40. The catalyst of claim 34, wherein the siliceous support is present in an amount of 25 wt.% to 99 wt.%, based on the total weight of the catalyst.

41. The catalyst of claim 34, wherein the siliceous support has a surface area of from 50 m²/g to 600 m²/g.
42. The catalyst of claim 34, wherein the siliceous support is selected from the group consisting of silica, silica/alumina, calcium metasilicate, pyrogenic silica, high purity silica and mixtures thereof.
43. The catalyst of claim 42, wherein the siliceous support contains less than 1 wt.% of aluminum, based on the total weight of the catalyst.
44. The catalyst of claim 34, wherein the first metal is platinum and the second metal is tin.
45. The catalyst of claim 44, wherein the molar ratio of platinum to tin is from 0.4:0.6 to 0.6:0.4.
46. The catalyst of claim 34, wherein the first metal is palladium and the second metal is rhenium.
47. The catalyst of claim 46, wherein the molar ratio of rhenium to palladium is from 0.7:0.3 to 0.85:0.15.
48. The catalyst of claim 34, wherein the second metal is present in an amount of from 0.1 to 10 wt.%, based on the total weight of the catalyst.
49. The catalyst of claim 34, wherein the catalyst further comprises a third metal different from the first metal and the second metal.
50. The catalyst of claim 49, wherein the third metal is selected from the group consisting of cobalt, palladium, ruthenium, copper, zinc, platinum, tin, and rhenium.

51. The catalyst of claim 49, wherein the third metal is present in an amount of 0.05 and 4 wt.%, based on the total weight of the catalyst.
52. The catalyst of claim 34, wherein the catalyst is suitable for use as a hydrogenation catalyst in converting acetic acid to ethanol and yields an acetic acid conversion of at least 10%.
53. The catalyst of claim 52, wherein the catalyst has a selectivity to ethanol of at least 80%.
54. The catalyst of claim 53, wherein the catalyst has a selectivity to methane, ethane, and carbon dioxide of less than 4%.
55. The catalyst of claim 53, wherein the catalyst has a productivity that decreases less than 6% per 100 hours of catalyst usage.
56. A process for preparing a catalyst, the process comprising the steps of:
 - (a) contacting a first metal precursor to a first metal with a modified siliceous support to form an impregnated support, wherein the modified siliceous support comprises a siliceous material and at least one metasilicate support modifier; and
 - (b) heating the impregnated support under conditions effective to reduce the first metal and form the catalyst.
57. The process of claim 56, further comprising the steps of:
 - (c) contacting the at least one metasilicate support modifier or a precursor thereof with the siliceous material to form a modified support precursor;
 - (d) heating the modified support precursor under conditions effective to form the modified support.
58. The process of claim 56, wherein the heating occurs under a reducing atmosphere, at least in part.

59. The process of claim 56, further comprising the step of calcining the catalyst.
60. The process of claim 56, wherein the at least one metasilicate support modifier is selected from the group consisting of (i) alkaline earth metal metasilicates, (ii) alkali metal metasilicates, (iii) Group IIB metal metasilicates, (iv) Group IIIB metal metasilicates, and mixtures thereof.
61. The process of claim 56, wherein the first metal is selected from the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten.
62. The process of claim 56, wherein the catalyst comprises the first metal is present in an amount of from 0.1 to 25 wt.%, based on the total weight of the catalyst.
63. The process of claim 56, wherein the at least one metasilicate support modifier is selected from metasilicates of a metal selected from the group consisting of sodium, potassium, magnesium, scandium, yttrium, and zinc.
64. The process of claim 56, wherein the at least one metasilicate support modifier comprises CaSiO_3 .
65. The process of claim 56, wherein the at least one metasilicate support modifier is present in the catalyst in an amount of 0.1 wt.% to 50 wt.%, based on the total weight of the catalyst.
66. The process of claim 56, wherein the modified siliceous support is present in the catalyst in an amount from 25 wt.% to 99 wt.%, based on the total weight of the catalyst.

67. The process of claim 56, wherein the siliceous material has a surface area of from 50 m²/g to 600 m²/g.
68. The process of claim 56, wherein the siliceous material is selected from the group consisting of silica, silica/alumina, calcium metasilicate, pyrogenic silica, high purity silica and mixtures thereof.
69. The process of claim 68, wherein the siliceous material contains less than 1 wt.% of aluminum, based on the total weight of the catalyst.
70. The process of claim 56, wherein the first metal is selected from the group consisting of Group IB, IIB, IIIB, IVB, VB, VIB, VIIB, or VIII transitional metal, a lanthanide metal, an actinide metal or a metal from any of Groups IIIA, IVA, VA, or VIA.
71. The process of claim 56, further comprising the steps of impregnating and reducing a second metal precursor to a second metal different from the first metal on the support either before, after, or concurrently with steps (a) and (b).
72. The process of claim 71, wherein the first metal is platinum and the second metal is tin.
73. The process of claim 72, wherein the molar ratio of platinum to tin in the catalyst is from 0.4:0.6 to 0.6:0.4.
74. The process of claim 71, wherein the first metal is palladium and the second metal is rhenium.
75. The process of claim 74, wherein the molar ratio of rhenium to palladium in the catalyst is from 0.7:0.3 to 0.85:0.15.

76. The process of claim 71, wherein the second metal is selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, ruthenium, rhenium, gold, and nickel.
77. The process of claim 71, wherein the second metal is present in the catalyst in an amount of from 0.1 to 10 wt.%, based on the total weight of the catalyst.
78. The process of claim 71, further comprising the steps of impregnating and reducing a third metal precursor to a third metal different from the first metal and the second metal on the support either before, after, or concurrently with steps (a) and (b).
79. The process of claim 78, wherein the third metal is selected from the group consisting of cobalt, palladium, ruthenium, copper, zinc, platinum, tin, and rhenium.
80. The process of claim 78, wherein the third metal is present in the catalyst in an amount from 0.05 and 4 wt.%, based on the total weight of the catalyst.
81. A process for preparing a catalyst, the process comprising the steps of:
- (a) contacting a first metal precursor to a first metal with a modified siliceous support comprising at least one support modifier, wherein the first metal is selected from the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten;
 - (b) contacting a second metal precursor to a second metal, different from the first metal, with the modified siliceous support, wherein the second metal is selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, rhenium, and nickel; and
 - (c) heating the modified siliceous support under conditions effective to reduce the first metal and the second metal and form the catalyst.
82. The process of claim 81, wherein the heating occurs after steps (a) and (b).

83. The process of claim 81, wherein the heating occurs between steps (a) and (b) to reduce the first metal and after steps (a) and (b) to reduce the second metal.
84. The process of claim 81, further comprising the steps of:
- (d) contacting at least one metasilicate support modifier or a precursor thereof with the siliceous material to form a modified support precursor; and
 - (e) heating the modified support precursor under conditions effective to form the modified siliceous support.
85. The process of claim 81, wherein the heating occurs under a reducing atmosphere, at least in part.
86. The process of claim 81, further comprising the step of:
- (d) calcining the catalyst.
87. The process of claim 86, wherein the calcining occurs after steps (a) and (b).
88. The process of claim 86, wherein the calcining occurs between steps (a) and (b) and after steps (a) and (b).
89. The process of claim 81, wherein the at least one support modifier is selected from the group consisting of (i) alkaline earth metal metasilicates, (ii) alkali metal metasilicates, (iii) Group IIB metal metasilicates, (iv) Group IIIB metal metasilicates, and mixtures thereof.
90. The process of claim 81, wherein the first metal is present in an amount of from 0.1 to 25 wt.%, based on the total weight of the catalyst.

91. The process of claim 81, wherein the at least one support modifier is selected from metasilicates of a metal selected from the group consisting of sodium, potassium, magnesium, scandium, yttrium, and zinc.
92. The process of claim 81, wherein the at least one support modifier comprises CaSiO_3 .
93. The process of claim 81, wherein the at least one support modifier is present in an amount of 0.1 wt.% to 50 wt.%, based on the total weight of the catalyst.
94. The process of claim 81, wherein the modified siliceous support is present in an amount of 25 wt.% to 99 wt.%, based on the total weight of the catalyst.
95. The process of claim 81, wherein the modified siliceous support has a surface area of from $50 \text{ m}^2/\text{g}$ to $600 \text{ m}^2/\text{g}$.
96. The process of claim 81, wherein the modified siliceous support further comprises a support material selected from the group consisting of silica, silica/alumina, calcium metasilicate, pyrogenic silica, high purity silica and mixtures thereof.
97. The process of claim 96, wherein the modified siliceous support contains less than 1 wt.% of aluminum, based on the total weight of the catalyst.
98. The process of claim 81, wherein the first metal is platinum and the second metal is tin.
99. The catalyst of claim 98, wherein the molar ratio of platinum to tin is from 0.4:0.6 to 0.6:0.4.
100. The process of claim 81, wherein the first metal is palladium and the second metal is rhenium.

101. The process of claim 100, wherein the molar ratio of rhenium to palladium is from 0.7:0.3 to 0.85:0.15.
102. The process of claim 81, wherein the second metal is present in an amount of from 0.1 to 10 wt.%, based on the total weight of the catalyst.
103. The process of claim 81, further comprising the steps of impregnating and reducing a third metal precursor to a third metal different from the first metal and the second metal on the modified siliceous support.
104. The process of claim 103, wherein the third metal is selected from the group consisting of cobalt, palladium, ruthenium, copper, zinc, platinum, tin, and rhenium.
105. The process of claim 103, wherein the third metal is present in an amount of 0.05 and 4 wt.%, based on the total weight of the catalyst.