

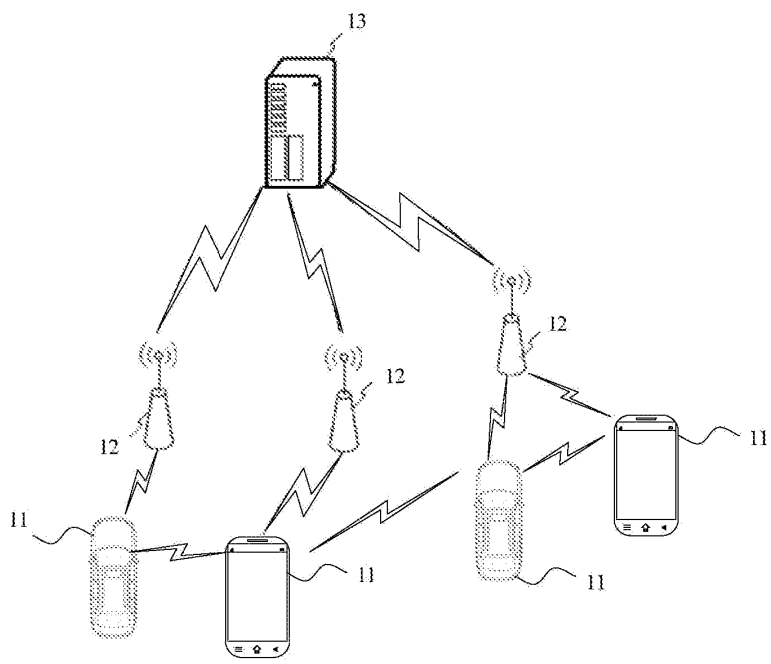


图 1

S110: 向核心网设备
发送与定位节点间上行发送和下行接收的第一
时间间隔信息; 第一时间间隔信息用于确定UE的位置信息

图 2

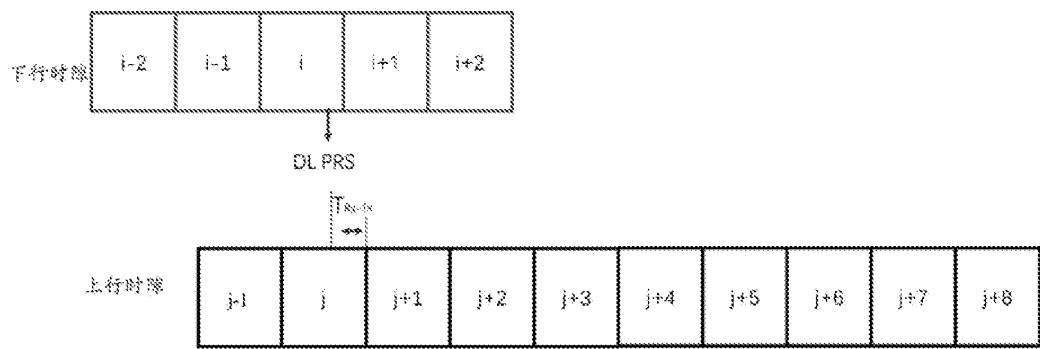


图 3

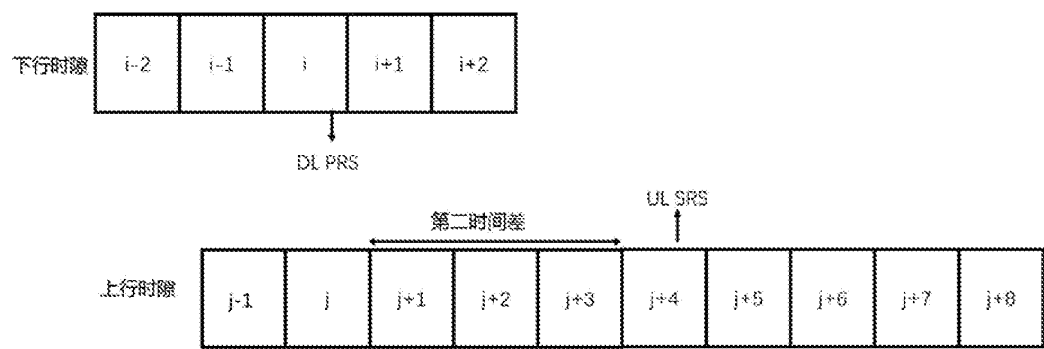


图 4

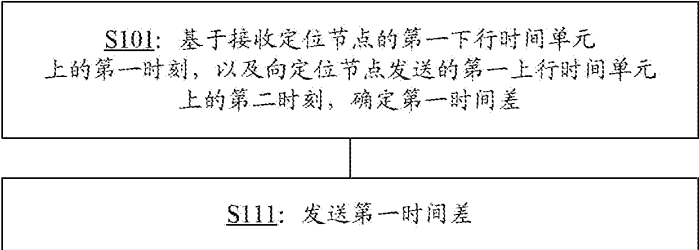


图 5

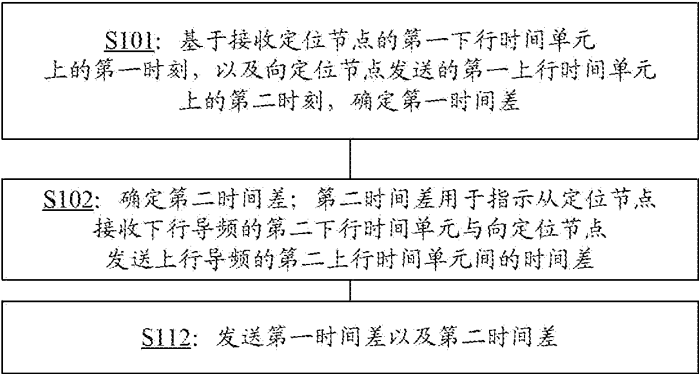


图 6

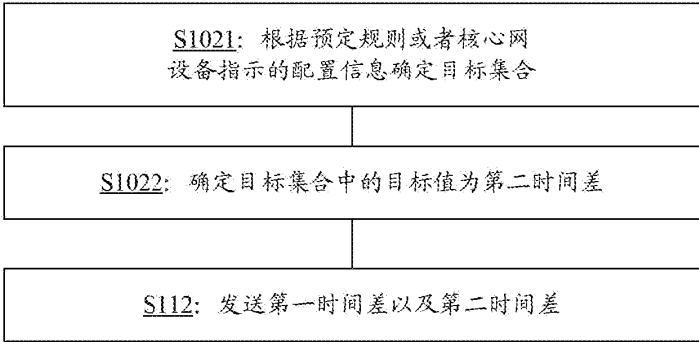


图 7

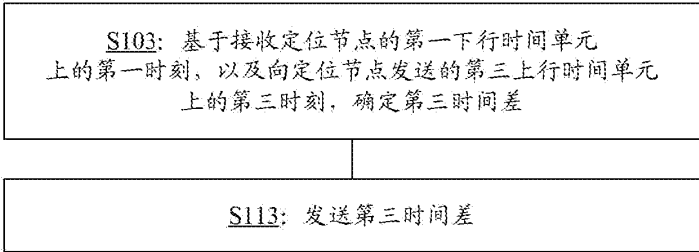


图 8

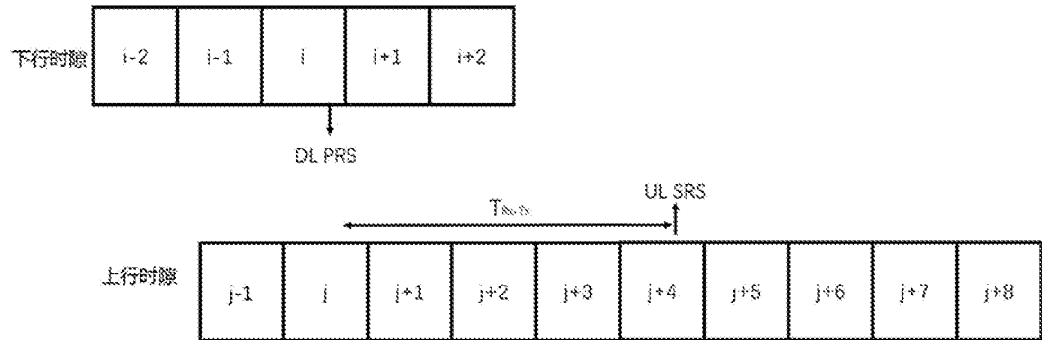


图 9




图 10

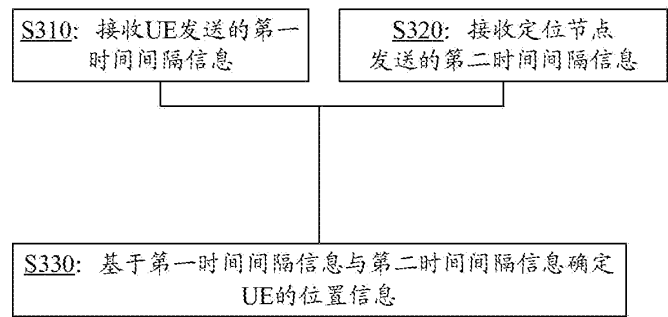


图 11

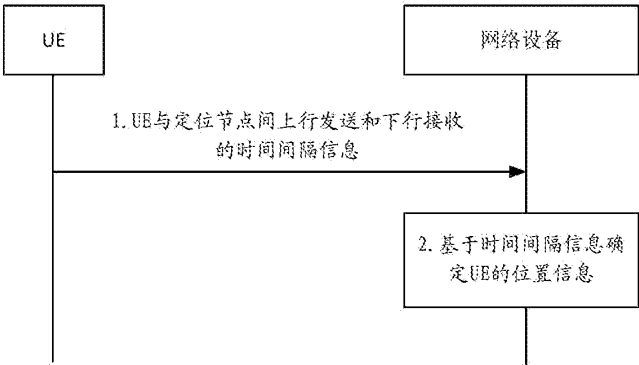


图 12

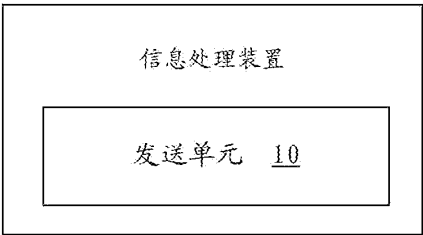


图 13

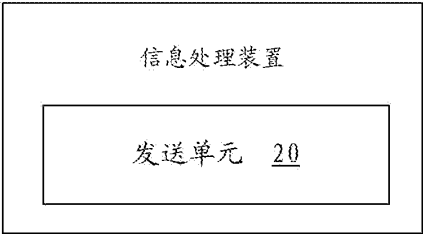


图 14

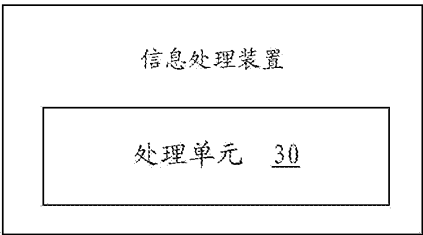


图 15

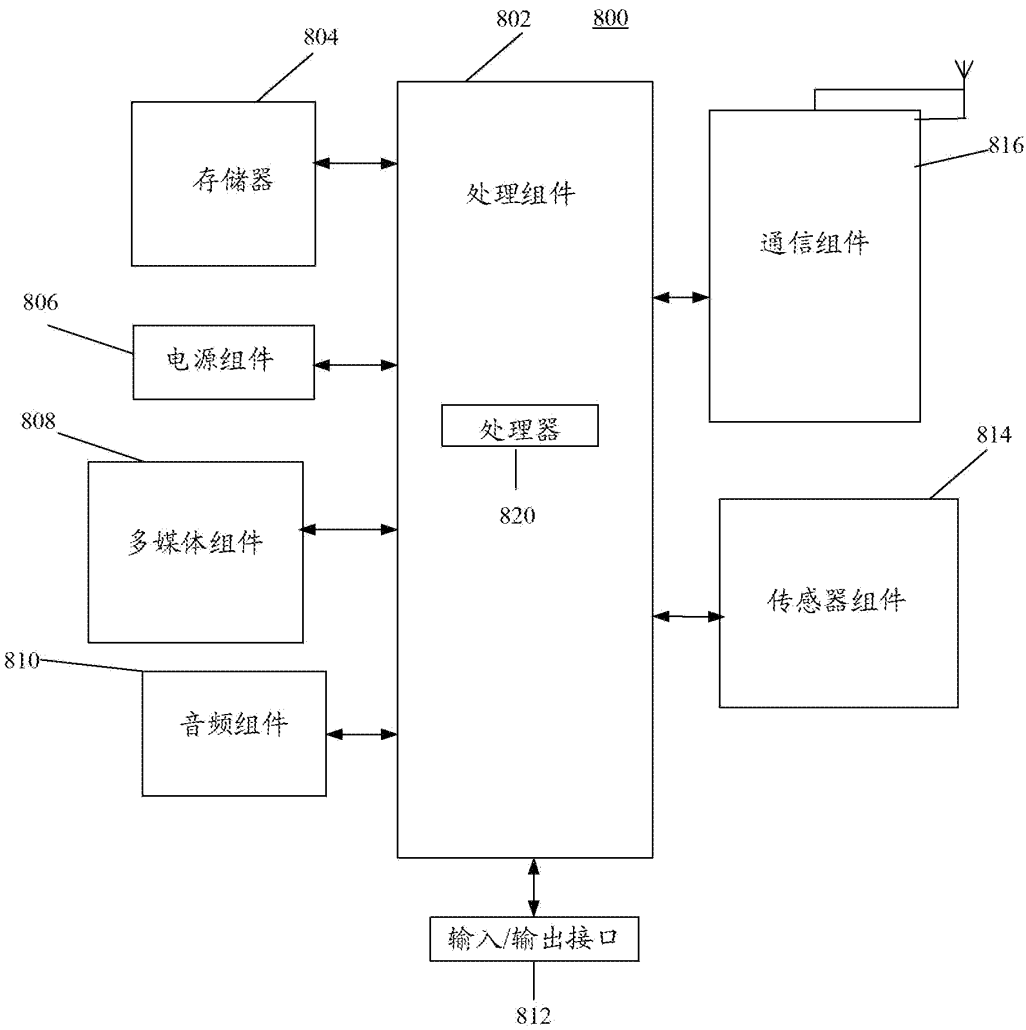


图 16

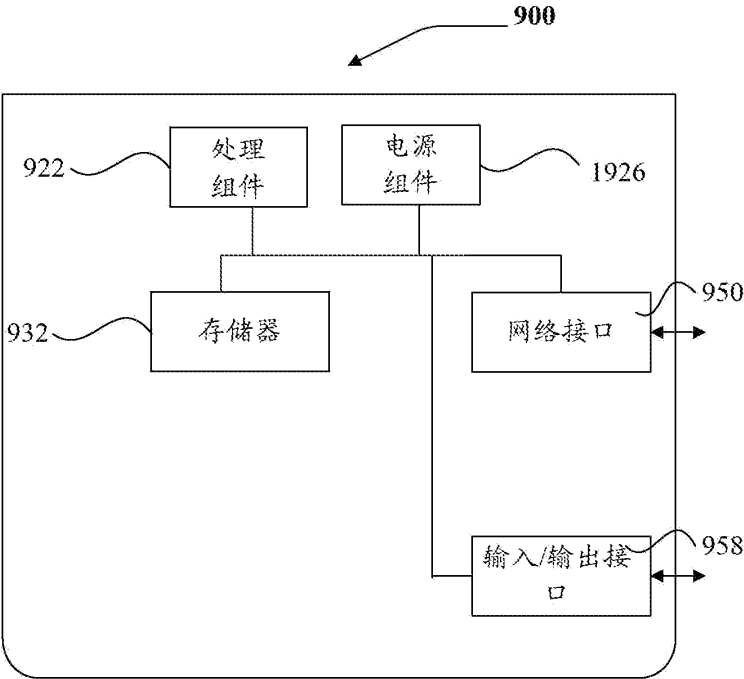


图 17