



(51) International Patent Classification:
A61J 1/14 (2006.01) *B65D 51/22* (2006.01)

(21) International Application Number:
PCT/US2013/069878

(22) International Filing Date:
13 November 2013 (13.11.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/726,272 14 November 2012 (14.11.2012) US

(71) Applicant: ABBOTT LABORATORIES [US/US]; Dept.
377/AP6A-1, 100 Abbott Park Road, Abbott Park, Illinois
60064 (US).

(72) Inventors: KROPCZYNSKI, John; 687 Whispering
Woods, Powell, Ohio 43065 (US). MCBROOM, Jeremy;
1551 Clubview Blvd S, Columbus, Ohio 43235 (US).

WALTER, Meghan; 6151 Craughwell Lane, Dublin,
Ohio 43017 (US).

(74) Agents: ENGLE, Mark R. et al.; Abbott Nutrition a Divi-
sion of, Abbott Laboratories, 3300 Stelzer Road, Dept
108140 RP3-2, Columbus, Ohio 43219 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: CAP SUITABLE FOR USE WITH ENTERAL FEEDING CONTAINER

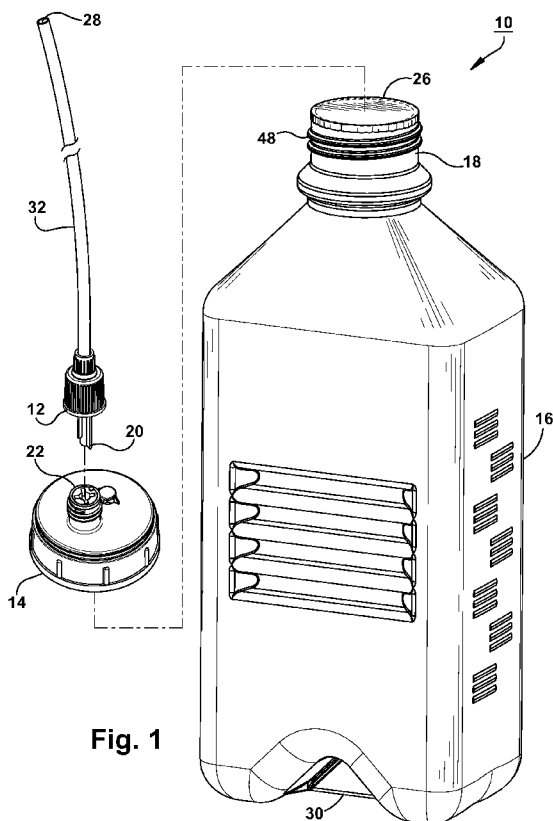


Fig. 1

(57) Abstract: A cap for use in enteral feeding from a container. The cap includes a base and an insert cutter. The base has a top surface, a bottom surface, and an outer ring. The top surface has a protruding port suitable for insertion of a spike connector. The protruding port defines a spike insertion chamber extending from a spike connector insert aperture to a spike connector outlet aperture. The outer ring is configured for attachment to a container having a mouth. The insert cutter has a first end portion attached to the bottom surface of the base and about an edge of the spike connector outlet aperture and a second end portion extending over at least a portion of the spike connector outlet aperture. The insert cutter is capable of flexing in an insertion direction of a spike connector inserted through the spike insertion chamber.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*