



- (51) **International Patent Classification:**
F16G 15/06 (2006.01) *B63C 11/52* (2006.01)
- (21) **International Application Number:**
PCT/NL2012/050873
- (22) **International Filing Date:**
11 December 2012 (11.12.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
2007948 12 December 2011 (12.12.2011) NL
- (71) **Applicant:** IHC HANDLING SYSTEMS V.O.F.
[NL/NL]; Distributieweg 3, NL-2645 EG Delfgauw (NL).
- (72) **Inventors:** VAN STEIJN, Theodorus Gerardus Wil-
helmus; Het Jaagpad 24, NL-3461 HC Linschoten (NL).
MULDERIJ, Klaas-Jan; Distributieweg 3, NL-2645 EG
Delfgauw (NL).
- (74) **Agent:** DE BOER, Henk; Nederlandsch Octrooibureau,
J.W. Frisolaan 13, NL-2517 JS The Hague (NL).
- (81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** SHACKLE ASSEMBLY

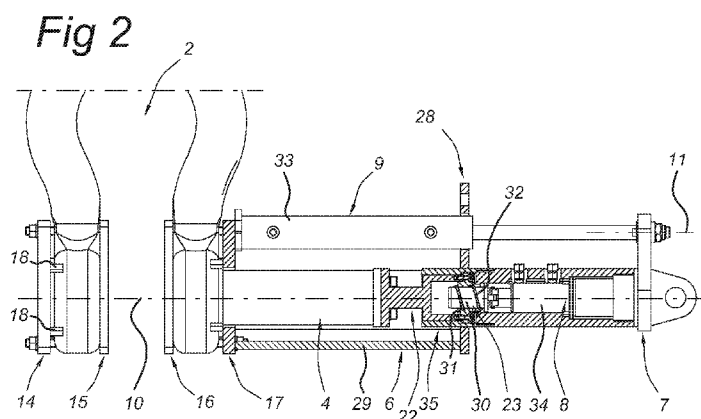

(57) **Abstract:** The invention relates to a shackle assembly (1) comprising a shackle (2) and a driving device (9) coupled with the shackle for driving a bolt system, which driving device (8) is arranged to reciprocate the bolt system along the longitudinal axis of the bolt system between a shackle installing position and a shackle releasing position, wherein the bolt system comprises a locking means (21) for locking the bolt system in its shackle installing position, and wherein the shackle assembly comprises means for transforming reciprocating movement of the bolt system into rotation of the locking means around the longitudinal axis of the bolt system between a bolt locking position and a bolt release position of the locking means.

