(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
8 October 2009 (08.10.2009)

PCT

(10) International Publication Number
WO 2009/123805 A2

(51) International Patent Classification:
E21B 33/068 (2006.01) *E21B 34/02* (2006.01)

(21) International Application Number:
PCT/US2009/035028

(22) International Filing Date:
24 February 2009 (24.02.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/041,154 31 March 2008 (31.03.2008) US

(71) Applicant *(for all designated States except US)*: **CAMERON INTERNATIONAL CORPORATION** [US/US]; 1333 W. Loop N. Suite 1700, Houston, Texas 77027 (US).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **NGUYEN, Dennis P.** [US/US]; 3305 Aspenbrook Ct., Pearland, Texas 77581 (US). **ANDERSON, David** [US/US]; 1660 Lincoln Street #2950, Denver, Colorado 80264 (US). **VANDERFORD, Delbert** [US/US]; 12311 Pine Glen Lane, Cypress, Texas 77429 (US).

(74) Agent: **SWANSON, Tait R.**; 7915 FM 1960 West, Suite 330, Houston, TX 77070 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,

[Continued on next page]

(54) Title: METHODS AND DEVICES FOR ISOLATING WELLHEAD PRESSURE

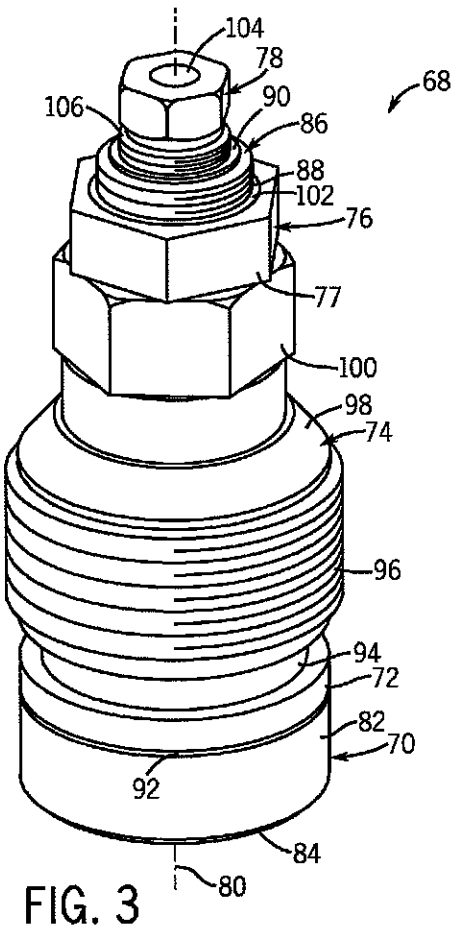


FIG. 3

(57) Abstract: A wellhead is provided. In one embodiment, the wellhead includes a plug for sealing a side passage of the wellhead. The plug may include an outer member, an inner member extending through the outer member and coupled to the outer member with at least one degree of freedom of movement relative to the outer member, and a moveable seal disposed around the outer member. In some embodiments, the moveable seal is configured to seal against the side passage in response to being moved on the outer member by the inner member.

WO 2009/123805 A2

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*