



(51) International Patent Classification:
G02F 1/1335 (2006.01)

(21) International Application Number:
PCT/SG2020/050324

(22) International Filing Date:
10 June 2020 (10.06.2020)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **AGENCY FOR SCIENCE, TECHNOLOGY AND RESEARCH** [SG/SG]; 1 Fusionopolis Way, #20-10 Connexis North Tower, Singapore 138632 (SG).

(72) Inventors: **MANSHA, Shampy**; c/o Institute of Materials Research & Engineering, 2 Fusionopolis Way, Innovis, #08-03, Singapore 138634 (SG). **PANIAGUA DOMINGUEZ, Ramon Jose**; c/o Institute of Materials Research & Engineering, 2 Fusionopolis Way, Innovis, #08-03, Singapore 138634 (SG). **KUZNETSOV, Arseniy**;

c/o Institute of Materials Research & Engineering, 2 Fusionopolis Way, Innovis, #08-03, Singapore 138634 (SG).


(74) Agent: **VIERING, JENTSCHURA & PARTNER LLP**; P.O. Box 1088, Rochor Post Office, Rochor Road, Singapore 911833 (SG).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: SPATIAL LIGHT MODULATOR AND METHOD OF FORMING THE SAME

FIG. 3

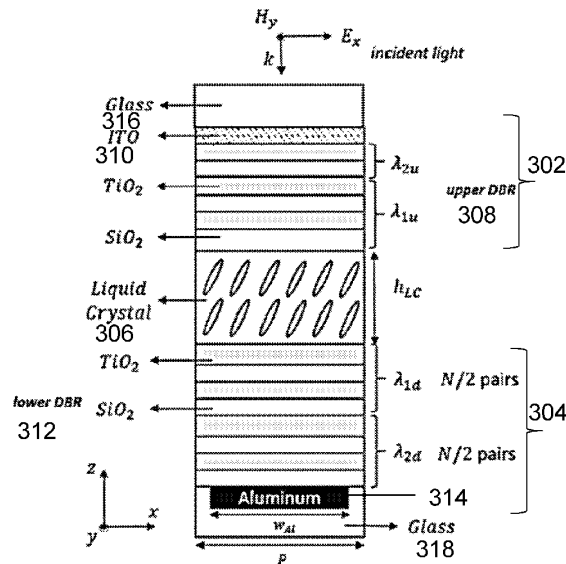

(57) Abstract: Various embodiments may provide a spatial light modulator (SLM). The spatial light modulator may include a first reflector. The spatial light modulator may also include a second reflector. The spatial light modulator may further include a liquid crystal layer between the first reflector and the second reflector. The first reflector may include a first electrode. The second reflector may include a second electrode. At least one reflector selected from the first reflector and the second reflector may be or may include a distributed Bragg reflector (DBR). The first reflector and the second reflector may form a Fabry-Perot (FP) cavity.

[Continued on next page]

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*