



(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2011/052205(22) International Filing Date:
19 September 2011 (19.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/909,283 21 October 2010 (21.10.2010) US(71) Applicant (for all designated States except US): **THE BOEING COMPANY** [US/US]; 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CARRALERO, Michael A.** [US/US]; 4682 Warner Ave, Unit B201, Huntington Beach, California 92649 (US). **QUIAMBAO, Jimmy M.** [US/US]; 21724 Winners Circle, Walnut, California 91789 (US). **POUNDS, Dale K.** [US/US]; 834 Joachim St, Festus, Missouri 63028 (US).(74) Agent: **QUAN, John A.**; The Boeing Company, 100 North Riverside Plaza, Chicago, Illinois 60606-2016 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: MICROGRID CONTROL SYSTEM

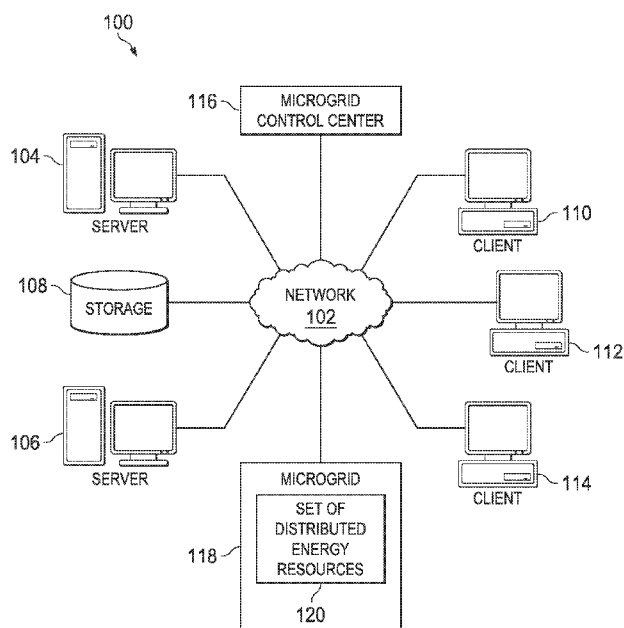


FIG. 1

(57) Abstract: A method, apparatus, and computer program product is provided for configuring a microgrid. A first configuration of the microgrid having a set of microgrid elements is initialized. An address for each element in the set of microgrid elements of the microgrid is verified. In response to receiving status data from the set of microgrid elements connected in a peer-to-peer network indicating a reconfiguration of the microgrid, the set of microgrid elements is re-aligned to form a second grid configuration. The second grid configuration is executed.