


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B28B 1/16, E04C 2/04, 2/30, B28B 7/22, 7/24, 19/00, B32B 13/04		A1	(11) International Publication Number: WO 99/11442
			(43) International Publication Date: 11 March 1999 (11.03.99)
(21) International Application Number: PCT/AU98/00706		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 28 August 1998 (28.08.98)		Published With international search report.	
(30) Priority Data: PO 8864 29 August 1997 (29.08.97) AU PP 3181 24 April 1998 (24.04.98) AU			
(71) Applicant (for all designated States except US): BORAL RESOURCES (NSW) PTY. LIMITED [AU/AU]; Greystanes Road, South Wentworthville, NSW 2145 (AU).			
(72) Inventors; and			
(75) Inventors/Applicants (for US only): MOSES, Paul, Russell [AU/AU]; 91 Burraneer Bay Road, Cronulla, NSW 2230 (AU). MUNN, Robert Lawrence [AU/AU]; 32 Althone Crescent, Killamey Heights, NSW 2087 (AU). STORY, Robert [GB/AU]; Tarrangaua, Lovett Bay, NSW 2105 (AU).			
(74) Agent: SPRUSON & FERGUSON; G.P.O. Box 3898, Sydney, NSW 2001 (AU).			

(54) Title: BUILDING PANEL AND METHOD AND APPARATUS OF FORMING SAME

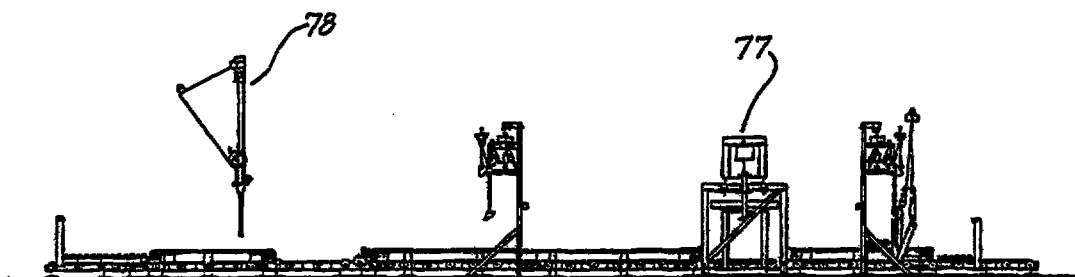

(57) Abstract

A building panel includes a central core and a pair of opposed coating surfaces formed integrally with the core. The method of forming the building panel includes the application of a flowable, settable coating material to respective surfaces of at least two baffles (100), placing the baffles in a substantially parallel, spaced interrelationship, at least substantially filling the space between the two baffles (100) with a settable core material prior to setting of the core material, and allowing the core material and coating material to set.