

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局



(43) 国際公開日
2011 年 4 月 21 日(21.04.2011)

PCT

(10) 国際公開番号
WO 2011/045871 A1

- (51) 国際特許分類:
B60B 17/00 (2006.01) **B61B 13/00** (2006.01)
B60B 37/00 (2006.01)
- (21) 国際出願番号: PCT/JP2009/071385
- (22) 国際出願日: 2009 年 12 月 24 日(24.12.2009)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2009-237048 2009 年 10 月 14 日(14.10.2009) JP
- (71) 出願人 (米国を除く全ての指定国について): 三菱重工業株式会社(MITSUBISHI HEAVY INDUSTRIES, LTD.) [JP/JP]; 〒1088215 東京都港区港南二丁目 1 6 番 5 号 Tokyo (JP).
- (72) 発明者; および
- (75) 発明者/出願人 (米国についてのみ): 前山 寛之(MAEYAMA, Hiroyuki) [JP/JP]; 〒1088215 東京都港区港南二丁目 1 6 番 5 号 三菱重工業株式会社内 Tokyo (JP). 片平 耕介(KATAHIRA,

Kousuke) [JP/JP]; 〒2100824 神奈川県川崎市川崎区日ノ出 2-16-20 三菱重工交通機器エンジニアリング株式会社内 Kanagawa (JP).


- (74) 代理人: 奥山 尚一, 外(OKUYAMA, Shoichi et al.); 〒1000014 東京都千代田区永田町 2 丁目 1 3 番 5 号 赤坂エイトワンビル 7 階 Tokyo (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ

[続葉有]

(54) Title: GUIDED WHEEL DEVICE FOR GUIDE TRACK TYPE VEHICLE

(54) 発明の名称 : 案内軌条式車両の案内輪装置

[図1]

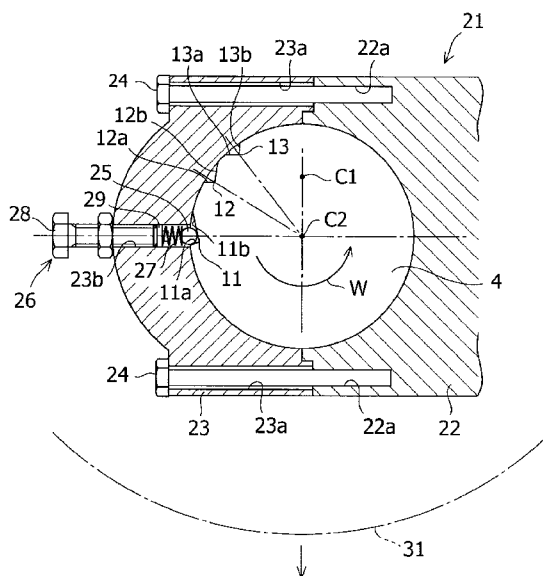

(57) Abstract: Provided is a guided wheel device for a guide track type vehicle, this guided wheel device being such that the structure is simple, that the cost can be reduced, that maintenance work can be easily performed, that the maintenance management cost can also be reduced, and that the wear adjustment position does not change due to vibrations during travel. More specifically, provided is a guided wheel device for a guide track type vehicle, this guided wheel device being equipped with a wheel axle (4) rotatably supported by a bearing (21), a main guided wheel (31) rotatably installed in the upper part of the wheel axle (4), and a branch guided wheel (32) rotatably installed in the lower part of the wheel axle (4). The rotation center (C1) of the main guided wheel (31) is eccentric with respect to the axle center (C2) of the wheel axle (4). The circumferential surface of the wheel axle (4) is provided with a plurality of piece-to-be-fitted receiving recesses (11 - 13) which are circumferentially disposed side by side. The bearing (21) is provided with a piece-to-be-fitted (25) which is to be fitted into the piece-to-be-fitted receiving recesses (11 - 13), and a fit adjustment device (26) which presses the piece-to-be-fitted (25) toward the wheel axle (4) in such a way that the piece-to-be-fitted (25) abuts one of the piece-to-be-fitted receiving recesses (11 - 13) and is capable of releasing the pressing force applied to the piece-to-be-fitted (25).

(57) 要約:

[続葉有]