

KELVIN CONTACT SOCKET

FIELD OF THE INVENTION

The present invention is a test socket for the testing of integrated circuit devices. In particular, the present invention is a test socket provided with
5 "Kelvin" contacts for testing analog integrated circuit devices.

BACKGROUND OF THE INVENTION

Testing of integrated circuit (IC) devices is an essential part of IC device production. For analog or linear products, voltage drop and current flow are two important parameters that need to be determined in the testing of such
10 products. These two parameters are highly affected by the arrangement of the test circuitry, and the quality of the contact points within the tester. For testing systems that use contact fingers, a set of two contact fingers clamping the IC device leads from the top and bottom allows four-terminal circuit for testing. One pair of contact fingers provides the contact for passing
15 the measurement current, while the other contact finger provides the contacts for measuring the voltage drop at the device under test. This allows the testing system to measure any voltage drift or drop due to resistance within the test lead or due to contact resistance, and adjust the voltage accordingly to provide a constant preset voltage for testing to be performed.

20 Although contact finger sets provide a four terminal circuit, recent trends have been to shift from testing by contact fingers to testing by test sockets. One important reason is that for each type of IC packaging, a different set of contact fingers have to be manufactured. Adaptation from standard sets is not possible. On the other hand, test sockets have the advantage that they

can be adapted by the IC manufacturer to be used for testing their IC packages. Therefore, a wide range of standard sockets can be supplied for testing numerous types of IC devices.

There is, however, no test socket in the market that is provided with Kelvin contacts to allow four-terminal measurements. The main difficult is that this feature requires two pairs of contact points for each pair of corresponding leads of the IC device to be tested. In the case of contact finger sets, the two fingers in each pair contact the IC device lead bi-directionally. Therefore, both the top and bottom surface of the lead is utilized, and there is sufficient room for contact to be made effectively. In the case of a contact socket, however, the testing finger contacts the IC device lead in only one direction from the socket side. Due to the short length of the tip and the small diameter of the IC device lead, conventional thinking has been that it is not feasible to provide a Kelvin contact for testing sockets. In addition to the small surface area that is available for contact with the socket finger, friction during testing results in carbon build up at the contact points of the socket fingers, creating further problems with cross contamination. There is therefore a need to provide a testing socket with Kelvin contacts which can avoid the above-stated pitfalls in practical use.

20 OBJECT OF THE INVENTION

It is an object of the present invention to provide a testing socket with Kelvin contacts.

It is a further object of the present invention to provide a testing socket which allows a IC packaging tester to input and sense a stable and constant electrical voltage for IC device testing.

SUMMARY OF THE INVENTION

The present invention is a test socket for facilitating the testing of integrated circuit (IC) devices. The test socket is provided with "Kelvin" contacts to allow four-terminal testing. A series of conducting strip sets are embedded
5 across a non-conducting base and aligned juxtaposed to each other. Each strip set includes two pairs of electrodes. Each electrode is electrically insulated from another electrode. Two pairs of electrodes are designed such that each pair functions to contact one of the two corresponding leads of an IC device. Within the pair of electrodes, the first electrode has a tail section,
10 and neck section and a head section, and the second electrode has a receiving end and a body.

The tail section of the first electrode and one end of the body of the second electrode is adapted for electrical connection with a test jig. In the resting position, the head section and the receiving end protrude out of the
15 base adjacent to each other without coming into contact, with the receiving end positioned between the head and the base. The neck section of the first electrode connects the head section with the tail section, and is adapted to providing a resilience to bias the head section away from the receiving end. During testing, an IC device is positioned close to the socket, with the leads
20 pressed against the head section of the first electrode. This results in the compression of the neck section, causing the head section to contact the receiving end. The connection between the receiving end and the head occurs very close to the point of contact between the IC lead and the head. Consequently, a Kelvin contact is achieved by passing the measurement

voltage in one electrode, and measuring the voltage drop at the IC device on the other electrode.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Figure 1 is a cross sectional view of a test socket in the prior art.

Figure 2 is a cross sectional view of a test socket in the resting position in accordance with the present invention.

Figure 3 is a cross sectional view of a test socket in the test position in accordance with the present invention.

10 Figure 4 is a schematic diagram to show the interconnection between the device under test and the tester.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is a test socket provided with an extra pair of electrodes which allows Kelvin contact to be made to reduce measurement errors during the testing of IC devices. This socket is provided with two pairs of electrodes for each IC device lead. Due to the small surface area available on the lead of an IC device for contact, even if the electrodes could be made small enough to provide two separate contact points per lead, the distance separating the contact surfaces of the electrodes would have to be very short if both electrodes were to be able to maintain sufficient contact with the lead during testing. Friction occurring during contact with the lead causes the lead soldering on the lead to scrape off, contaminating the contact points. This results in at least three problems. The first problem is that different levels of carbon build up would occur on the two contact surfaces, resulting in different resistance build up. As a result, the pair of pins, which needs to be equivalent to provide an effective Kelvin contact, would be unequally contaminated soon after use, and would no longer serve their intended function. Another problem, caused by the short distance between the two contact points, is that carbon build up might actually cause the two surfaces to be connected with an unknown surface area, causing instability in the electrical parameters. A third important problem is that scratching of the lead surface is aggravated if the lead is pressed against two very small electrodes, as the pressure is concentrated on a small surface area. As a result, producing a socket with Kelvin contact has been considered impractical.

The solution to the problem lies in designing a pair of electrodes such that only the first electrode actually touches the lead, while the second electrode is allowed to connect to the first electrode during testing at a point very close to the contact point between the IC device lead and the first electrode. One embodiment of achieving this configuration is to provide a flat head in the first electrode, with one side of the flat surface adapted for contact with the lead, and the opposite side adapted for contact with the receiving end of the second electrode.

While the present invention has been described particularly with references to Figs 1 to 3 , it should be understood that the figures are for illustration only and should not be taken as limitation on the invention. It is contemplated that many changes and modifications may be made by one of ordinary skill in the art without departing from the spirit and the scope of the invention described.

Figure 1 shows a cross-sectional view of a test socket found in the prior art. The socket includes a series of metallic strips embedded in a non-conducting base 20. The strips act as electrodes and are arranged in two rows such that the contact surface 24 of each electrode 22 is aligned with the lead 26 of the IC device 28 to be tested. the other end of the strip is adapted for connection with the test jig. There is only a single electrode for each lead, with no Kelvin contact.

Figure 2 shows a socket in accordance with the present invention. This socket is provided with a non-conducting base 30 and a pair of metallic electrodes for contact with each lead of a IC device 31. the first electrode 32 and the second electrode 34 are both embedded in the base. In Figure

2, only a portion of the base is shown to allow clearer illustration of the configuration of the electrodes. Another pair of electrodes are found in a mirror image configuration opposite the first pair for connection with the corresponding lead on the other side of the IC device. Each electrode is
5 electrically insulated from each other.

The first electrode **32** in Figure 2 includes a head section **36**, a neck section **38** and a tail section **40**. The second electrode **34** contains a body section **42** connected to a receiving end **44**. The tail section **40** of the first electrode is formed into a thin rod to facilitate connection with the test jig **43**.
10 The body of the second pin also comprises a tail, and has a structure and function similar to the tail section of the first electrode. The head section of the first electrode is preferably formed into a flat tongue shape to provide maximum surface area for contact with the lead of the IC device to be tested. The head section is joined to the tail section of the first electrode via the
15 neck section **38**. The neck section is shaped to provide a spring force to bias the head section away from the receiving end of the second electrode. This allows the first and second electrode to be electrically disconnected and an open circuit is maintained in the resting position. This is an important feature as it is a standard testing requirement to do pin-to-pin short circuit
20 testing.

In the testing mode as shown in Figure 3, an IC device is placed next to the test socket with each lead **33** of the IC device in contact with one head section **36** of one lead. A gentle pressure is applied on the lead to press the lead into firm contact with the head section of the first electrode as shown in
25 the direction of the arrows in Figure 3. This pressure also compresses the

springy neck section **38**, and causes the head to come into effective contact with the receiving end **44** of the second electrode at surface **46**. These contact surfaces are adapted to form good electrical contacts. The head section and the receiving end are preferably gold plated to prevent oxidation. The head section is preferably formed into a flat tongue structure to minimize the distance between the lead and the receiving end when testing is in progress, and to maximize the area of the contact surface.

Figure 4 shows one embodiment in which the socket is used for IC device testing. In this example, the electrodes are connected to the tester **39** via electrical conducting wires **41**. When a current is sent across the IC device through the first electrode, resistance between the first electrode and the electrical conductor wire from tester can be measured reliably using this test socket with Kelvin contacts.

CLAIMS**I Claim:**

- 1 1. A contact socket with Kelvin contact for facilitating the testing of
2 integrated circuit devices comprising :
- 3 a base of non-conducting material for attachment of said contact socket
4 to a test jig;
- 5 a plurality of conducting strip sets, each strip set embedded across said
6 base and aligned juxtaposed with other strip sets, each said strip set further
7 having two pair of electrodes being electrically insulated from each other
8 and adapted for connecting with one lead of said integrated device, said
9 pair of electrodes further comprising a first electrode and a second
10 electrode, said first electrode having a tail section, a neck section and a
11 head section, said second electrode, having a receiving end and a body;
- 12 said tail section of said first electrode adapted for electrical connection
13 with said test jig, said head section protruding from said base and adapted
14 for contact with a lead of said integrated circuit device, said neck section
15 connecting said tail section with said head section, said neck section
16 providing a resilience to bias said head section away from said receiving
17 end, whereby said head section and said receiving end are separated by a
18 narrow space in the resting position; and
- 19 said body of said second electrode adapted for electrical connection with
20 said testing rig; said receiving end connected to said body and mounted
21 between said head section and said base,

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced




22 such that applying pressure on said lead of said integrated circuit device
23 to maintain electrical contact with said head section result in the
24 compression of said neck section and an effective electrical contact
25 between said head section and said receiving end occurs at a position
26 close to the connection between said lead and said head, whereby Kelvin
27 contact is maintained and the testing of said integrated circuit device is
28 accomplished reliably.

1 2. A contact socket according to claim 1 wherein said conducting strip set
2 comprises a first pair of electrodes and a second pair of electrodes, said first
3 pair embedded into said base as mirror images of said second pair,
4 whereby aid first pair of electrodes is used for measuring one lead on one
5 side of said integrated circuit device, and said second pair of electrodes is
6 used for measuring a corresponding lead on the opposite side of said
7 integrated circuit device.

1 3. A contact socket according to claim 1 or 2 wherein said head section of
2 said first electrode and said receiving end of said second electrode are gold
3 plated.

1 4. A contact socket according to claim 1 or 2 wherein said integrated circuit
2 device is of the linear type.

This Sheet Has Been Replaced




ABSTRACT**KELVIN CONTACT SOCKET**

A test socket with Kelvin contact for the testing of IC devices comprising a plurality of conducting strip sets embedded across a non-conducting strip and aligned juxtaposed to each other. Each strip set includes two pairs of electrodes. Two pairs of electrodes are designed such that each pair functions to contact one of the two corresponding leads of an IC device. Within the pair of electrodes, one electrode forms a connection between the IC lead and the tester, and the other electrode provides a Kelvin contact whereby testing of the IC device is accomplished reliably.

FIGURE 3

This Sheet Has Been Replaced



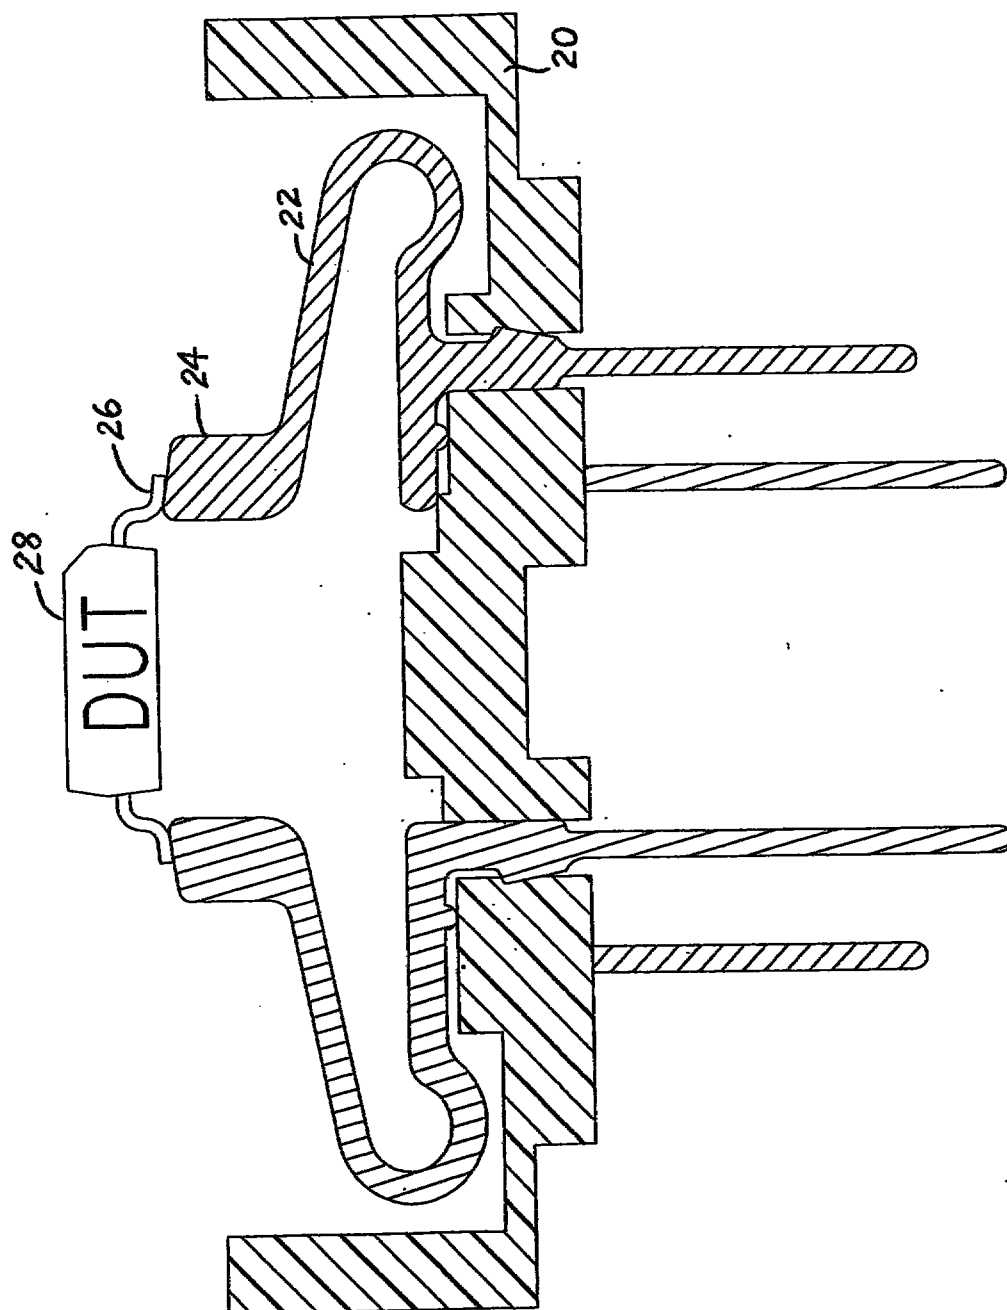


FIG. 1

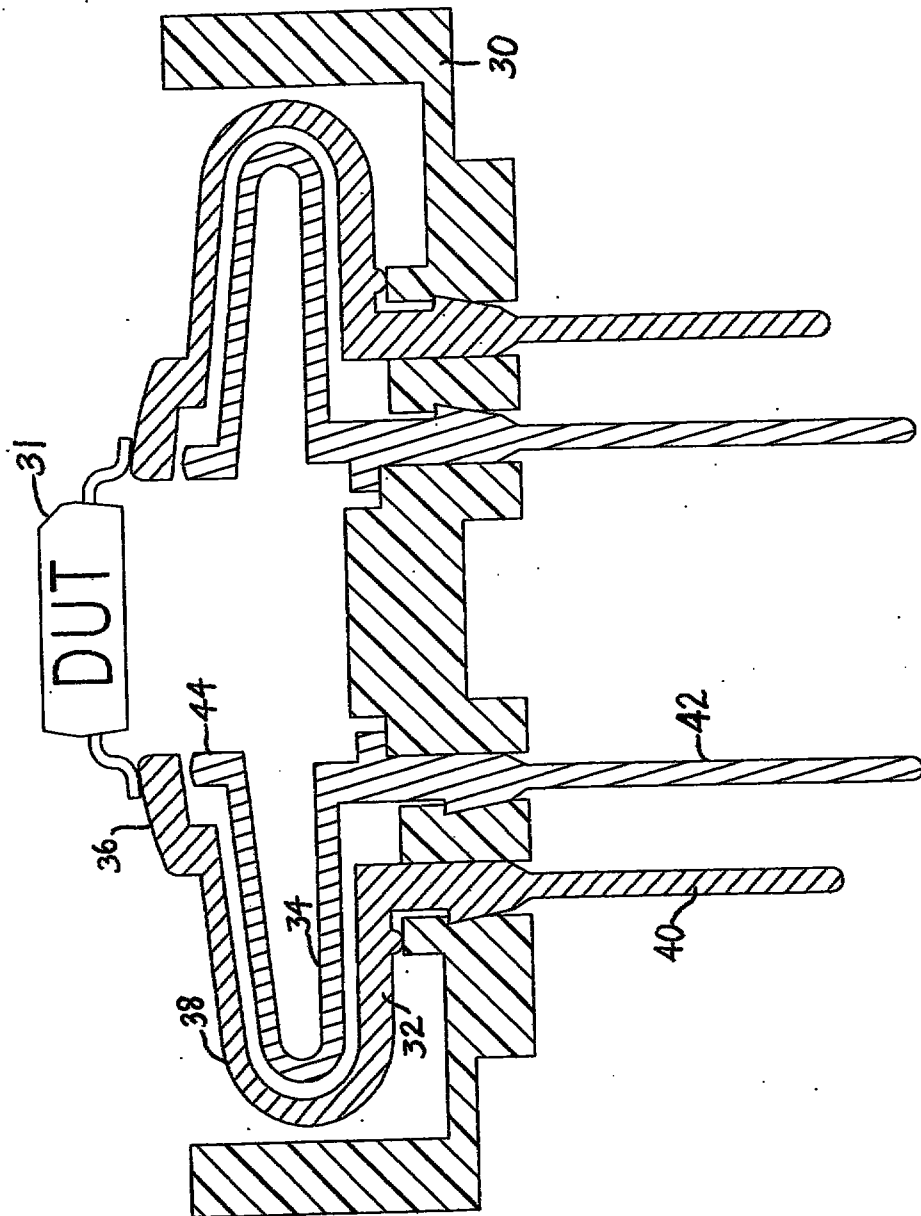


FIG. 2

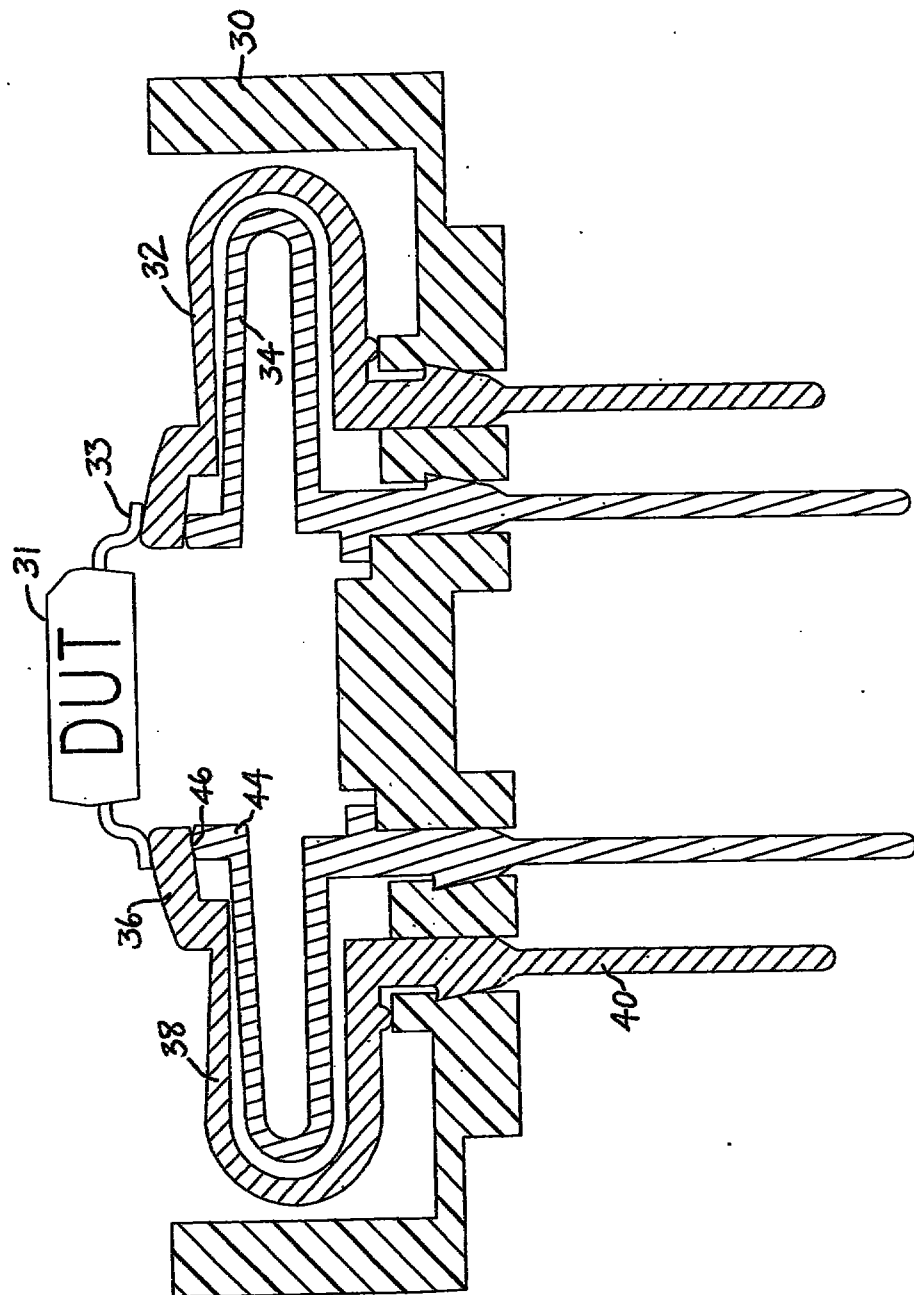


FIG. 3


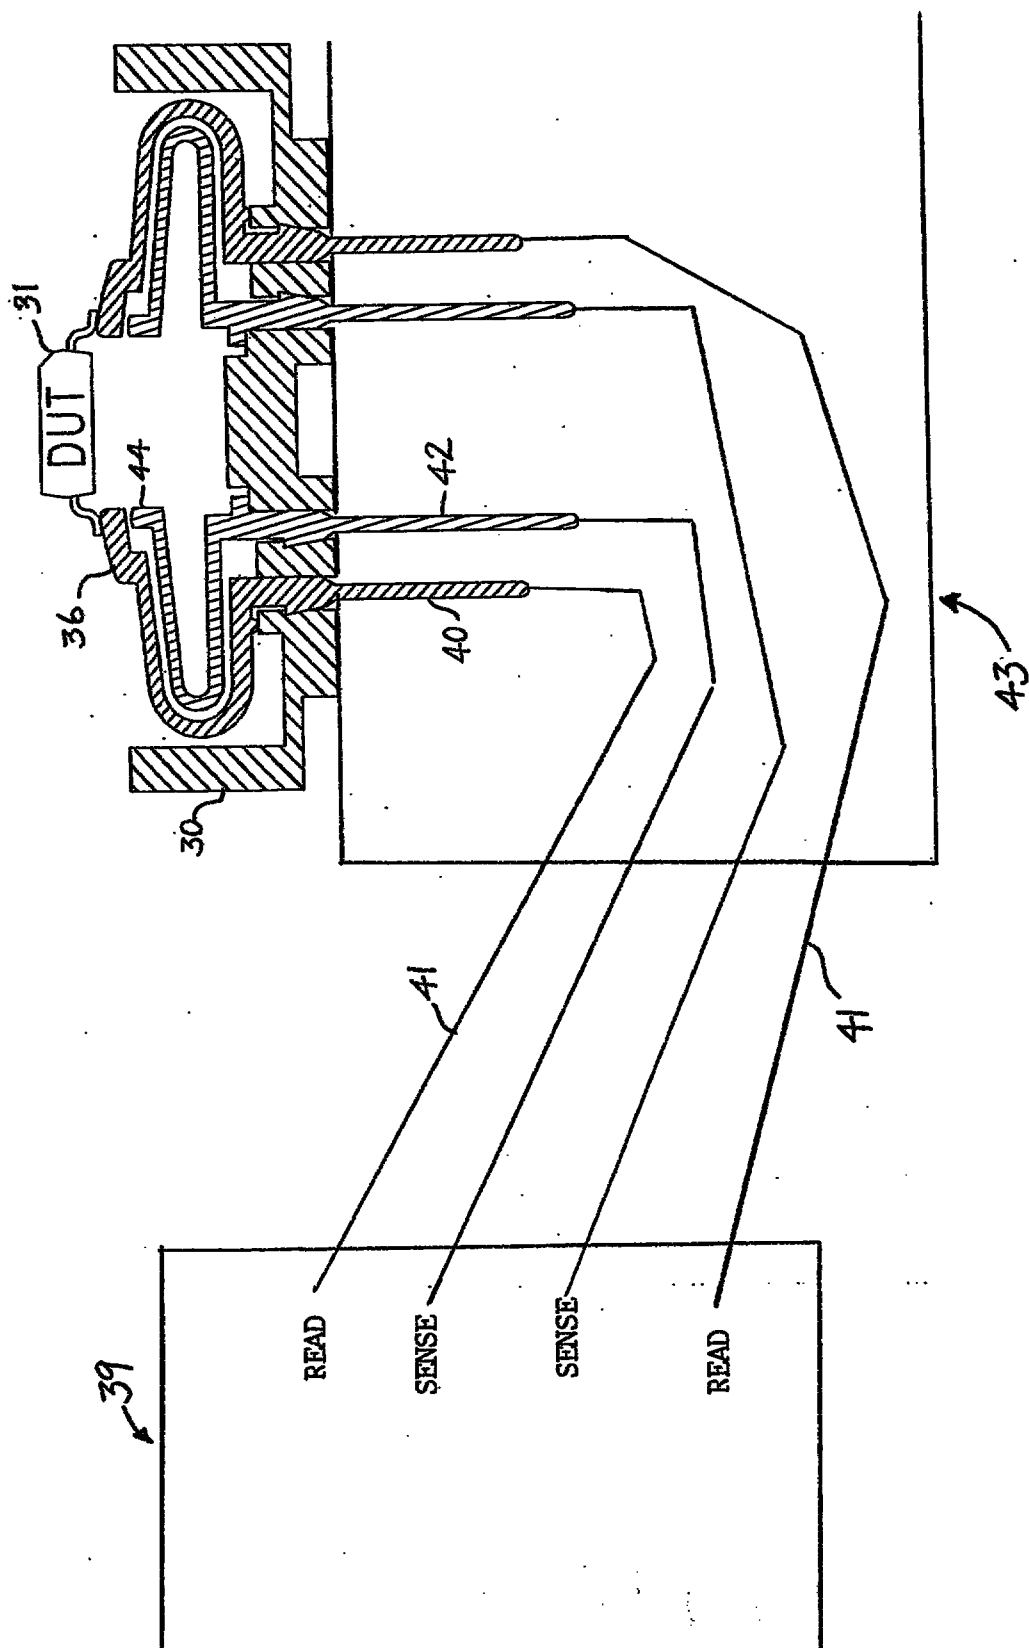


FIG. 4

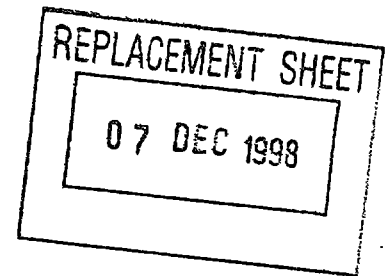

CLAIMS

I Claim:

- 1 1. A contact socket with Kelvin contact for facilitating the testing of
2 integrated circuit devices comprising :
3 a base of non-conducting material for attachment of said contact
4 socket to a test jig;
5 a plurality of electrically conducting strip sets, each strip set
6 embedded across said base and aligned juxtaposed with other strip
7 sets, each strip set further having a pair of electrodes adapted for
8 electrical connection with a corresponding lead of said integrated
9 device in the testing position, said pair of electrodes having
10 a first electrode with a tail section, a neck section and a head
11 section; and
12 a second electrode, having a body connected to a receiving end
13 movable between a resting position and a testing position;
14 said tail section of said first electrode adapted for electrical
15 connection with said test jig, said head section protruding from
16 said base and adapted for contact with a lead of said integrated
17 circuit device, said neck section connecting said tail section with
18 said head section;
19 said body of said second electrode adapted for electrical
20 connection with said testing rig;



21 said receiving end electrically disconnected from said head
22 section in the resting position and movable to the testing position
23 to form an electrical connection with said head section and said
24 device during testing.

1 2. A contact socket according to claim 1 wherein said neck section is
2 made of a resilient material to bias said head section away from said
3 receiving end, such that said head section and said receiving end are
4 separated by a narrow space in the resting position, and applying
5 pressure on said lead of said integrated circuit device to maintain
6 electrical contact with said head section result in the compression of
7 said neck section to form an effective electrical contact between said
8 head section and said receiving end at a position close to the
9 connection between said lead and said head.

1 3. A contact socket according to claim 1 or 2 wherein said plurality of
2 conducting strip sets comprises a set of first pair of electrodes and a
3 set of second pair of electrodes, each of said first pair embedded into
4 said base as mirror images of each of said second pair, whereby said
5 first pair of electrodes is used for measuring one lead on one side of
6 said integrated circuit device, and said second pair of electrodes is
7 used for measuring a corresponding lead on the opposite side of said
8 integrated circuit device.

1 4. A contact socket according to claim 1 or 2 wherein said head section
2 of said first electrode and said receiving end of said second electrode
3 are gold plated.



07 DEC 1998

- 1 5. A contact socket according to claim 1 or 2 wherein said head section
2 and said receiving end are flat, such that the distance between the
3 lead of the device under testing and the receiving end is minimized.
- 1 6. A contact socket according to claim 1 or 2 wherein said integrated
2 circuit device is of the linear type.



ABSTRACT**KELVIN CONTACT SOCKET**

A test socket with Kelvin contact for the testing of IC devices comprising a plurality of conducting strip sets embedded across a non-conducting strip and aligned juxtaposed to each other. Each strip set includes two pairs of electrodes. Two pairs of electrodes are designed such that each pair functions to contact one of the two corresponding leads of an IC device. Within the pair of electrodes, one electrode forms a connection between the IC lead and the tester, and the other electrode provides a Kelvin contact whereby testing of the IC device is accomplished reliably.

FIGURE 3