

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



G00002

(43) International Publication Date
14 March 2002 (14.03.2002)


PCT

(10) International Publication Number
WO 02/20356 A3

- (51) International Patent Classification⁷: **B65D 51/28**, 51/20, 81/32, 47/26 (72) Inventors; and
(75) Inventors/Applicants (for US only): **SMITH, Rhonda, Kerry** [AU/AU]; 17 Gerro Street, Sunnibank Hills, QLD 4109 (AU). **REDMOND, Colin** [AU/AU]; 58 Cairns Terrace, Red Hill, QLD 4059 (AU).
- (21) International Application Number: PCT/AU01/01138
- (22) International Filing Date: 11 September 2001 (11.09.2001) (74) Agent: **CULLEN & CO.**; Level 26, 239 George Street, Brisbane, QLD 4000 (AU).
- (25) Filing Language: English (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (26) Publication Language: English
- (30) Priority Data:
PR 5007 11 September 2000 (11.09.2000) AU
PR 7336 29 August 2001 (29.08.2001) AU
- (71) Applicant (for all designated States except US): **INTEGRATED MARKETING AUSTRALIA PTY LTD** [AU/AU]; 8 Zambia Street, Sunnybank, QLD 4109 (AU). (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: A DISPENSING CAP

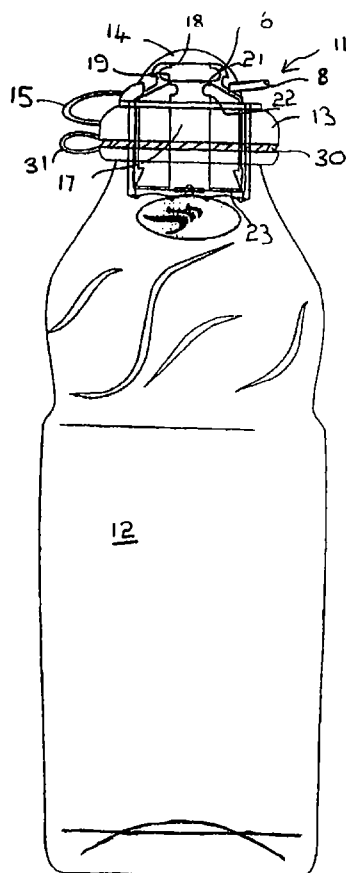

(57) Abstract: A dispensing cap (11) for a container, the cap having a closure member (16) movable from a first closed position to an open position in which fluid can pass through the cap, the closure member also being movable between the open position and a second closed position; and a chamber (24) for holding material to be dispensed from the cap, whereby the closure member is initially in the first closed position and when the closure member is moved to the second closed position, the material is released from the chamber.



162162

WO 02/20356 A3