



(51) International Patent Classification:
E05F 3/10 (2006.01)

(21) International Application Number:
PCT/EP2011/065380

(22) International Filing Date:
6 September 2011 (06.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10175479.4 6 September 2010 (06.09.2010) EP
10187458.4 13 October 2010 (13.10.2010) EP

(71) Applicant (for all designated States except US): **DIANO-
RA GOSIO** [IT/IT]; Via della Fonte, 9/C, I-25075 Nave
(BS) (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BACCHETTI, Lu-
ciano** [IT/IT]; Via della fonte, 9/C, I-25075 Nave (BS)
(IT).

(74) Agents: **AUTUORI, Angelo** et al.; c/o Eureka IP Con-
sulting, Borgo Santa Lucia 31, I-36100 Vicenza (IT).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DOOR CLOSER, PARTICULARLY FOR GLASS DOORS

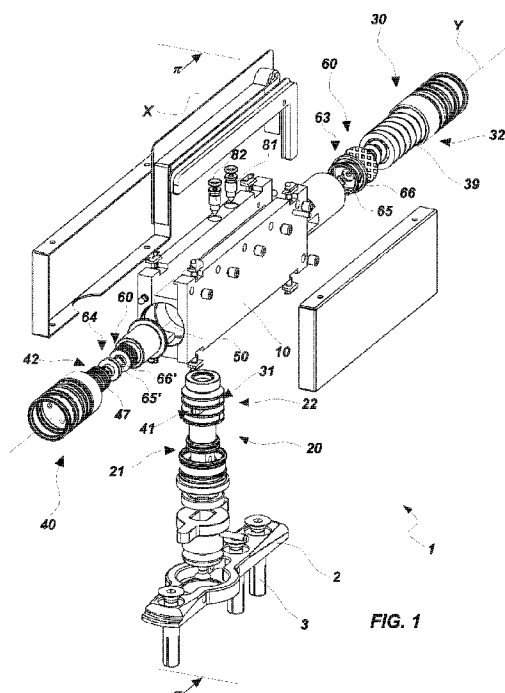

(57) Abstract: A door closer for doors, particularly glass doors, which are supported by a stationary support structure (S) and are movable between an open door position and a closed door position. The door closer comprises a box-like body (10) and a pin (20) reciprocally rotatably coupled to rotate around a first axis (x) between the open door position and the closed door position. Closing means are provided (30) to automatically return the door, as well as a braking means (40) acting thereon to counteract their action. First and second cam elements (31, 41) unitary with the pin (20) and interposed between a first and second plunger elements (32, 42) are provided.