

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
17 October 2024 (17.10.2024)



(10) International Publication Number
WO 2024/215210 A1

(51) International Patent Classification:

A61C 3/00 (2006.01) F24F 7/00 (2021.01)
A47B 96/00 (2006.01) F24F 11/00 (2018.01)
A47B 96/02 (2006.01)

(21) International Application Number:

PCT/NZ2024/050038

(22) International Filing Date:

12 April 2024 (12.04.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2023901080 13 April 2023 (13.04.2023) AU

(72) Inventor; and

(71) Applicant: WATKINS, Bruce Neil [NZ/NZ]; 32 Wai-iti
Terrace, Burnside, Christchurch, 8052 (NZ).

(74) Agent: MURPHY, Simon John; PO Box 9466, Hamilton,
3240 (NZ).


(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,

(54) Title: HAZARD MITIGATION CABINET

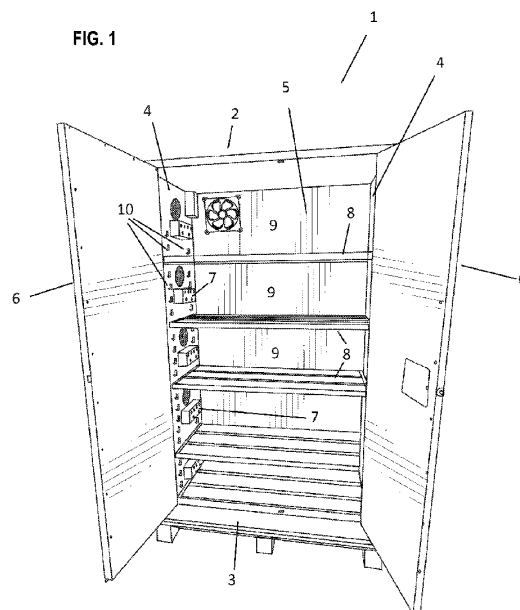

(57) Abstract: In one aspect the invention provides a hazard mitigation cabinet which defines a base, a roof, and at least one side wall or walls extending between the base and the roof. An access door is also located by at least one side wall or walls, with the side wall(s), door, base, and roof enclosing a secured volume and the door providing access to the secured volume. The cabinet also includes include at least one partition shelf extending between one or more side walls and the access door to divide the secured volume into two or more thermally isolated horizontal partitions.

[Continued on next page]

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE*