

TITLE OF INVENTION
TRACER-CONTAINING COMPOSITIONS

CROSS REFERENCE(S) TO RELATED APPLICATION(S)

- 5 This application claims the priority benefit of U.S. Provisional Patent Application 60/548,085, filed February 26, 2004, which is hereby incorporated herein by reference.

BACKGROUND OF THE INVENTION

10 1. Field of the Invention.

 The present invention relates to the field of compression refrigeration and air conditioning. Specifically, the present invention relates to a composition comprising refrigerant and tracer compound(s). Additionally, the present invention relates to a method for the identification
15 of refrigerant gases after leaving the custody of the original manufacturer and the verification of refrigerant authenticity. The aforementioned method provides for the detection of tracer compounds, which in turn, may alert the refrigeration industry to the occurrence of dilution, adulteration, contamination or other unauthorized modification of refrigeration products.

20

2. Description of Related Art.

 Environmental concerns have led the refrigeration industry to high levels of consciousness around the responsible use of refrigerants. The refrigeration industry, as well as the society at large, benefits when
25 everyone who manufactures, distributes, uses refrigerants, or services refrigeration and air conditioning equipment uses all applicable measures to keep equipment operating at the highest achievable level of energy efficiency. This reduces the amount of energy consumed by the equipment. Higher than necessary energy consumption, as well as
30 leakage of refrigerants, can contribute to unnecessary pollution of our atmosphere and waste of existing resources. This unnecessary waste also comes at a cost to the consumer for replacement of leaked refrigerant.

 In response to environmental concerns, manufacturers of
35 refrigerants have developed new refrigerant products that allow higher levels of energy efficiency when used in properly designed equipment. The new generation HFC refrigerants have less impact on the

environment than older generation chlorinated refrigerants in the event that they inadvertently leak into the atmosphere. The HFC refrigerants have zero ozone depletion potential, and in general have less tropospheric climate change potential than the refrigerants they replace. In addition, industry practices now mandate the elimination of leaks from most types of operating equipment, and require that refrigerant gas be recovered from equipment when that equipment is taken out of service or is opened to allow service work to be performed.

While the new high efficiency refrigerants and new responsible use policies are benefiting the environment, the benefit is not as great as it could be. In some instances, the recovered refrigerant gases are not properly reclaimed or recycled. The recovered refrigerant may be re-installed back into other pieces of equipment without being properly reclaimed and cleaned to remove any harmful or energy efficiency reducing impurities which may have been introduced in handling or as a result of poorly performing or damaged equipment. The equipment into which this refrigerant is introduced will then not operate at peak efficiency, and will consume more energy than necessary.

In addition, used refrigerant can be blended with virgin refrigerant, which generally results in a non-standard refrigerant gas composition. Similarly, used refrigerant can be re-packaged and sold as virgin refrigerant, without certification of purity and quality. These practices may result in increased atmospheric pollution and increased energy use, and places expensive refrigeration hardware at risk of being damaged.

In addition to negative environmental and equipment impact, there are economic losses to the refrigerant manufacturers and distributors. Refrigerant manufacturers make significant investments into the development of the quality new refrigerants products. Refrigerant distributors similarly have invested in equipment for the proper protection of refrigerants from contamination during packaging, storage, and distribution of refrigerants. When refrigerants are diluted or blended with recovered refrigerants, and sold as virgin refrigerant, manufacturers and distributors do not receive the benefit of their investment.

For the foregoing reasons, there has been a need for the ability to positively determine when a refrigerant composition is diluted or altered in any way, in a manner that does not compromise performance or the product properties to any measurable extent.

The present invention addresses this need by providing a highly secure way to label virgin refrigerant product.

BRIEF SUMMARY OF THE INVENTION

In a first aspect, there is provided a tracer-containing composition, said composition comprising a refrigeration/heating fluid and at least one tracer compound, said tracer compound being analytically detectable and selected from the group consisting of hydrofluorocarbons, deuterated hydrofluorocarbons, perfluorocarbons, fluoroethers, brominated compounds, iodated compounds, alcohols, aldehydes and ketones, nitrous oxide and combinations thereof with the proviso that said refrigeration/heating fluid is different from said tracer compound. Additionally, a composition as stated above wherein at least one of said tracer compound is present as a single pre-determined isomer.

In a second aspect, there is provided a method of using the tracer-containing composition as defined above, said method comprising combining said tracer compound with said refrigeration/heating fluid to make a tracer-containing refrigerant composition, and detecting said tracer compound in said tracer-containing refrigerant composition. Said method may comprise detecting the occurrence of dilution, adulteration or contamination of said composition.

In a third aspect, there is provided a method of producing refrigeration using the tracer-containing composition as defined above, said method comprising: evaporating the tracer-containing composition in the vicinity of a body to be cooled and thereafter condensing said composition.

In a fourth aspect, there is provided a method of producing refrigeration using the tracer-containing composition as defined above, said method comprising: condensing the tracer-containing composition in the vicinity of the body to be heated and thereafter evaporating said composition.

In a fifth aspect, there is provided a method for making the tracer-containing composition as defined above, said method comprising: combining a refrigeration/heating fluid with a tracer compound selected from the group consisting

of hydrofluorocarbons, deuterated hydrofluorocarbons, perfluorocarbons, fluoroethers, brominated compounds, iodated compounds, alcohols, aldehydes, ketones, nitrous oxide and combinations thereof.

Disclosed is the use of the tracer-containing composition in a method for producing refrigeration comprising evaporating said composition in the vicinity of a body to be cooled and thereafter condensing said composition. Also disclosed is a method of using the tracer-containing refrigerant composition for producing heat comprising condensing said composition in the vicinity of a body to be heated and thereafter evaporating said composition.

DETAILED DESCRIPTION OF THE INVENTION

Applicants specifically incorporate the entire contents of all cited references in this disclosure. Further, when an amount, concentration, or other value or parameter is given as either a range, preferred range, or a list of upper preferable values and lower preferable values, this is to be understood as specifically disclosing all ranges formed from any pair of upper range limit or preferred value and any lower range limit are preferred

value, regardless of whether such ranges are separately disclosed. Where a range of numerical values is recited herein, unless otherwise stated, the range is intended to include the endpoints thereof, and all integers and fractions within the range. It is not intended that the scope of the present invention be limited to the specific values recited when defining a range.

The refrigeration/heating fluid of the present invention may be any common refrigeration/heating fluid used in the refrigeration industry. Such refrigeration/heating fluids may be hydrofluorocarbons (HFCs), hydrochlorofluorocarbons (HCFCs), perfluorocarbons (PFCs), fluorocarbon ethers (HFEs), hydrocarbons, carbon dioxide (CO₂), ammonia (NH₃), or mixtures thereof. The fluorinated refrigeration/heating fluids, HFCs, HCFCs, HFEs and PFCs may be referred to as fluorocarbon refrigerants.

The fluorocarbon refrigerants of the present invention may have 1-8 carbon atoms, contain at least one fluorine atom, optionally contain chlorine and oxygen atoms, and have a normal boiling point of from -90°C to 80°C. These fluorocarbons may be represented by the general formula C_wF_{2w+2-x-y}H_xCl_yO_z, wherein w is 1-6, x is 0-9, y is 0-3, and z is 0-2, and wherein 2w+2-x-y is a positive integer.

Preferred of the fluorocarbons are those in which w is 1-6, x is 1-5, y is 0-1, and z is 0-1. The present invention is particularly useful with hydrofluorocarbon and hydrochlorofluorocarbon-based refrigerants.

Fluorocarbon refrigerants are commercial products available from a number of sources such as E. I. du Pont de Nemours & Co.,

Fluoroproducts, Wilmington, DE, 19898, USA, or are available from custom chemical synthesis companies such as PCR Inc., P.O. Box 1466, Gainesville, Florida, 32602, USA, and additionally by synthetic processes disclosed in publications such as Chemistry of Organic Fluorine

Compounds 2nd (revised edition), edited by Milos Hudlicky, published by Ellis Harwood-Prentice Hall Publishers, 1992. Representative

fluorocarbons include but are not limited to: CHClF₂ (HCFC-22), CHF₃ (HFC-23), CH₂F₂ (HFC-32), CH₃F (HFC-41), CF₃CF₃ (FC-116), CHClFCF₃ (HCFC-124), CHF₂CF₃ (HFC-125), CH₂ClCF₃ (HCFC-133a), CHF₂CHF₂ (HFC-134), CH₂FCF₃ (HFC-134a), CClF₂CH₃ (HCFC-142b), CHF₂CH₂F (HFC-143), CF₃CH₃ (HFC-143a), CHF₂CH₃ (HFC-152a), CHF₂CF₂CF₃ (HFC-227ca), CF₃CFHCF₃ (HFC-227ea), CHF₂CF₂CHF₂ (HFC-236ca), CH₂FCF₂CF₃ (HFC-236cb), CHF₂CHFCF₃ (HFC-236ea), CF₃CH₂CF₃

(HFC-236fa), $\text{CH}_2\text{FCF}_2\text{CHF}_2$ (HFC-245ca), $\text{CH}_3\text{CF}_2\text{CF}_3$ (HFC-245cb), $\text{CHF}_2\text{CHFCHF}_2$ (HFC-245ea), $\text{CH}_2\text{FCHFCH}_3$ (HFC-245eb), $\text{CHF}_2\text{CH}_2\text{CF}_3$ (HFC-245fa), $\text{CH}_2\text{FCF}_2\text{CH}_2\text{F}$ (HFC-254ca), $\text{CH}_3\text{CF}_2\text{CHF}_2$ (HFC-254cb), $\text{CH}_2\text{FCHFCHF}_2$ (HFC-254ea), $\text{CH}_3\text{CHFCH}_3$ (HFC-254eb), $\text{CHF}_2\text{CH}_2\text{CHF}_2$ (HFC-254fa), $\text{CH}_2\text{FCH}_2\text{CF}_3$ (HFC-254fb), $\text{CH}_3\text{CF}_2\text{CH}_3$ (HFC-272ca), $\text{CH}_3\text{CHFCH}_2\text{F}$ (HFC-272ea), $\text{CH}_2\text{FCH}_2\text{CH}_2\text{F}$ (HFC-272fa), $\text{CH}_3\text{CH}_2\text{CF}_2\text{H}$ (HFC-272fb), $\text{CH}_3\text{CHFCH}_3$ (HFC-281ea), $\text{CH}_3\text{CH}_2\text{CH}_2\text{F}$ (HFC-281fa), $\text{CHF}_2\text{CF}_2\text{CF}_2\text{CF}_2\text{H}$ (HFC-338pcc), $\text{CF}_3\text{CH}_2\text{CF}_2\text{CH}_3$ (HFC-365mfc), $\text{CF}_3\text{CF}_2\text{CF}_2\text{OCHFCH}_3$ (Freon® E1), $\text{CF}_3\text{CHFCHFCF}_2\text{CF}_3$ (HFC-43-10mee), $\text{C}_4\text{F}_9\text{OCH}_3$, and $\text{C}_4\text{F}_9\text{OC}_2\text{H}_5$.

Additionally, the fluorocarbon refrigerants of the present invention may be represented by the general formula $\text{C}_w\text{F}_{2w-x}\text{H}_x\text{O}_z$, wherein w may equal 3 to 8 and x may equal 0-17 and z may equal 0 to 2, and wherein $2w-x$ is a positive integer. Such fluorocarbon refrigerants include unsaturated compounds and other functionalized fluorocarbons, such as $\text{CF}_3(\text{CF}_2)_3\text{CH}=\text{CH}_2$ (perfluorobutylethylene, PFBE), $\text{CF}_3\text{CF}_2\text{C}(\text{O})\text{CF}(\text{CF}_3)_2$ (perfluoroethylisopropylketone, PEIK), and $\text{CF}_3\text{C}(\text{O})\text{CF}(\text{CF}_3)_2$ (perfluoromethylisopropylketone, PMIK).

More preferred fluorocarbon refrigerants are the hydrofluorocarbon and hydrochlorofluorocarbon-based refrigerants, such as, CHClF_2 (HCFC-22), CHF_3 (HFC-23), CH_2F_2 (HFC-32), CHClFCF_3 (HCFC-124), CHF_2CF_3 (HFC-125), CHF_2CHF_2 (HFC-134), CH_2FCF_3 (HFC-134a), CF_3CH_3 (HFC-143a), CHF_2CH_3 (HFC-152a), $\text{CHF}_2\text{CF}_2\text{CF}_3$ (HFC-227ca), $\text{CF}_3\text{CFHCF}_3$ (HFC-227ea), $\text{CF}_3\text{CH}_2\text{CF}_3$ (HFC-236fa), $\text{CHF}_2\text{CH}_2\text{CF}_3$ (HFC-245fa), $\text{CHF}_2\text{CF}_2\text{CF}_2\text{CF}_2\text{H}$ (HFC-338pcc), $\text{CF}_3\text{CHFCHFCF}_2\text{CF}_3$ (HFC-43-10mee), $\text{CF}_3(\text{CF}_2)_3\text{CH}=\text{CH}_2$ (perfluorobutylethylene, PFBE), $\text{CF}_3\text{CF}_2\text{C}(\text{O})\text{CF}(\text{CF}_3)_2$ (perfluoroethylisopropylketone, PEIK), $\text{CF}_3\text{C}(\text{O})\text{CF}(\text{CF}_3)_2$ (perfluoromethylisopropylketone, PMIK); and the azeotropic and azeotrope-like fluorocarbon refrigerant compositions, such as, HCFC-22/HFC-152a/HCFC-124 (known by the ASHRAE designations, R-401A, R-401B, and R-401C), HFC-125/HFC-143a/HFC-134a (known by the ASHRAE designation, R-404A), HFC-32/HFC-125/HFC-134a (known by ASHRAE designations, R-407A, R-407B, and R-407C), HCFC-22/HFC-143a/HFC-125 (known by the ASHRAE designation, R-408A), HCFC-22/HCFC-124/HCFC-142b (known by the ASHRAE designation: R-409A),

HFC-32/HFC-125 (R-410A), and HFC-125/HFC-143a (known by the ASHRAE designation: R-507).

The fluorocarbon refrigerants of the present invention may optionally further comprise up to 10 weight percent of dimethyl ether, or at least one C₃ to C₅ hydrocarbon, e.g., propane, propylene, cyclopropane, n-butane, isobutane, n-pentane, cyclopentane and neopentane (2,2-dimethylpropane). Examples of fluorocarbons containing such C₃ to C₅ hydrocarbons are azeotrope-like compositions of HCFC-22/HFC-125/propane (known by the ASHRAE designation, R-402A and R-402B), HCFC-22/octafluoropropane/propane (known by the ASHRAE designation, R-403A and R-403B), octafluoropropane/HFC-134a/isobutane (known by the ASHRAE designation, R-413A), HCFC-22/HCFC-124/HCFC-142b/isobutane (known by the ASHRAE designation, R-414A and R-414B), HFC-134a/HCFC-124/n-butane (known by the ASHRAE designation, R-416A), HFC-125/HFC-134a/n-butane (known by the ASHRAE designation, R-417A), HFC-125/HFC-134a/dimethyl ether (known by the ASHRAE designation, R-419A), and HFC-125/HFC-134a/isobutane (known by ASHRAE designation, R-422A).

The tracer compound of the present invention is selected from the group consisting of hydrofluorocarbon, deuterated hydrocarbon or hydrofluorocarbon, perfluorocarbon, fluoroether, brominated compound, iodated compound, alcohol, aldehydes and ketone, nitrous oxide (N₂O) and combinations thereof. While there may be overlap between a defined chemical compound, which may be a refrigeration/heating fluid, and a chemical compound that may be defined as a tracer compound, the same compound may not serve as both elements of a given composition. Suitable tracer compound candidates are listed in Table 1.


TABLE 1

Compound Name	Chemical Structure	CAS registry no.
Deuterated hydrocarbon or HFC compounds		
Ethane-d6	CD ₃ -CD ₃	1632-99-1
Propane-d8	CD ₃ -CD ₂ -CD ₃	2875-94-7
HFC-32-d2	CD ₂ F ₂	594-24-1
HFC-134a-d2	CD ₂ F-CF ₃	496024-52-3
HFC-143a-d3	CD ₃ -CF ₃	558-59-8


HFC-125-d	$\text{CDF}_2\text{-CF}_3$	87458-21-7
HFC-227ea-d	$\text{CF}_3\text{-CDF-CF}_3$	119117-94-1
HFC-227ca-d	$\text{CF}_3\text{-CF}_2\text{-CDF}_2$	662-02-2
HFC-134-d2	$\text{CDF}_2\text{-CDF}_2$	274689-13-3
HFC-236fa-d2	$\text{CF}_3\text{-CD}_2\text{-CF}_3$	72256-43-0
HFC-245cb-d3	$\text{CF}_3\text{-CF}_2\text{-CD}_3$	38878-30-7
HFC-263fb-d2*	$\text{CF}_3\text{-CD}_2\text{-CH}_3$	7370-99-2
HFC-263fb-d3	$\text{CF}_2\text{-CH}_2\text{-CD}_3$	7371-43-9
Fluoroethers		
HFOC-125E	$\text{CHF}_2\text{-O-CF}_3$	3822-68-2
HFOC-134aE	$\text{CH}_2\text{F-O-CF}_3$	2261-01-0
HFOC-143aE	$\text{CH}_3\text{-O-CF}_3$	421-14-7
HFOC-227 eaE	$\text{CF}_3\text{-O-CHF-CF}_3$	2356-62-9
HFOC-236faE	$\text{CF}_3\text{-O-CH}_2\text{-CF}_3$	20193-67-3
HFOC-245faE $\beta\gamma$ or HFOC-245faE $\alpha\beta$	$\text{CHF}_2\text{-O-CH}_2\text{CF}_3$ (or $\text{CHF}_2\text{CH}_2\text{-O-CF}_3$)	1885-48-9 (or 84011-15-4)
HFOC-245cbE $\beta\gamma$ or HFOC-245cb $\alpha\beta$	$\text{CH}_3\text{-O-CF}_2\text{-CF}_3$ (or $\text{CH}_3\text{-CF}_2\text{-O-CF}_3$)	22410-44-2 (or
HFE-42-11 mce (or Freon® E1)	$\text{CF}_3\text{-CF}_2\text{-CF}_2\text{-O-CHF-CF}_3$	3330-15-2
Freon® E2	$\text{CF}_3\text{-CF}_2\text{-CF}_2\text{-O-CF(CF}_3\text{) CF}_2\text{-O-CHF-CF}_3$	3330-14-1

Hydrofluorocarbons		
HFC-23	CHF_3	75-46-7
HFC-161	$\text{CH}_3\text{-CH}_2\text{F}$	353-36-3
HFC-152a	$\text{CH}_3\text{-CHF}_2$	75-37-6
HFC-134	$\text{CHF}_2\text{-CHF}_2$	359-35-3
HFC-227ea	$\text{CF}_3\text{-CHF-CF}_3$	431-89-0
HFC-227ca	$\text{CHF}_2\text{-CF}_2\text{-CF}_3$	2252-84-8
HFC-236cb	$\text{CH}_2\text{F-CF}_2\text{-CF}_3$	677-56-5
HFC-236ea	$\text{CF}_3\text{-CHF-CHF}_2$	431-63-0
HFC-236fa	$\text{CF}_3\text{-CH}_2\text{-CF}_3$	690-39-1
HFC-245cb	$\text{CF}_3\text{-CF}_2\text{-CH}_3$	1814-88-6
HFC-245fa	$\text{CHF}_2\text{-CH}_2\text{-CF}_3$	460-73-1
HFC-254cb	$\text{CHF}_2\text{-CF}_2\text{-CH}_3$	40723-63-5
HFC-254eb	$\text{CF}_3\text{-CHF-CH}_3$	421-48-7
HFC-263fb	$\text{CF}_3\text{-CH}_2\text{-CH}_3$	421-07-8
HFC-272ca	$\text{CH}_3\text{-CF}_2\text{-CH}_3$	420-45-1
HFC-281ea	$\text{CH}_3\text{-CHF-CH}_3$	420-26-8
HFC-281fa	$\text{CH}_2\text{F-CH}_2\text{-CH}_3$	460-13-9
HFC-329p	$\text{CHF}_2\text{-CF}_2\text{CF}_2\text{CF}_3$	375-17-7
HFC-329mmz	$(\text{CH}_3)_2\text{-CH-CF}_3$	382-24-1
HFC-338mf	$\text{CF}_3\text{-CH}_2\text{-CF}_2\text{-CF}_3$	2924-29-0
HFC-338pcc	$\text{CHF}_2\text{-CF}_2\text{CF}_2\text{-CHF}_2$	377-36-6
HFC-347s	$\text{CH}_3\text{-CF}_2\text{-CF}_2\text{-CF}_3$	662-00-0
HFC-43-10mee	$\text{CF}_3\text{-CHF-CHF-CF}_2\text{-CF}_3$	138495-42-8
Perfluorocarbons		
PFC-116	$\text{CF}_3\text{-CF}_3$	76-16-4
PFC-C216	$\text{Cyclo}(-\text{CF}_2\text{-CF}_2\text{-CF}_2-)$	931-91-9
PFC-218	$\text{CF}_3\text{CF}_2\text{CF}_3$	76-19-7
PFC-C318	$\text{Cyclo}(-\text{CF}_2\text{-CF}_2\text{-CF}_2\text{-CF}_2-)$	115-25-3
PFC-31-10mc	$\text{CF}_3\text{-CF}_2\text{-CF}_2\text{-CF}_3$	355-25-9
PFC-31-10my	$(\text{CF}_3)_2\text{CF-CF}_3$	354-92-7
PFC-C51-12mycm	$\text{Cyclo}(-\text{CF}(\text{CF}_3)\text{-CF}_2\text{-CF}(\text{CF}_3)\text{-CF}_2-)$	2994-71-0
PFC-C51-12mym, trans	$\text{Cyclo}(-\text{CF}_2\text{-CF}(\text{CF}_3)\text{-CF}(\text{CF}_3)\text{-CF}_2-)$	1583-98-8
PFC-C51-12mym, cis	$\text{Cyclo}(-\text{CF}_2\text{-CF}(\text{CF}_3)\text{-CF}(\text{CF}_3)\text{-CF}_2-)$	1583-97-7


Perfluorocarbons (continued)		
Perfluoromethylcyclopentane	Cyclo(-CF ₂ -CF ₂ (CF ₃)-CF ₂ -CF ₂ -CF ₂ -)	1805-22-7
Perfluoromethylcyclohexane	Cyclo(CF ₂ -CF ₂ (CF ₃)-CF ₂ -CF ₂ -CF ₂ -CF ₂ -)	355-02-2
Perfluorodimethylcyclohexane (ortho, meta, or para)	Cyclo(-CF ₂ -CF ₂ (CF ₃)-CF ₂ -CF ₂ (CF ₃)-CF ₂ -)	ortho – 306-89-9 meta – 335-27-3 para – 374-77-6
Perfluoroethylcyclohexane	Cyclo(-CF ₂ -CF ₂ (CF ₂ CF ₃)-CF ₂ -CF ₂ -CF ₂ -CF ₂ -)	335-21-7
Perfluoroindan	C ₉ F ₁₀ (see structure below)	1736-47-6



Perfluorotrimethylcyclohexane (all possible isomers)	Cyclo(-CF ₂ (CF ₃)-CF ₂ (CF ₃)-CF ₂ -CF ₂ (CF ₃)-CF ₂ -)	374-76-5
Perfluoroisopropylcyclohexane	Cyclo(-CF ₂ CF ₂ (CF ₂ (CF ₃) ₂)CF ₂ CF ₂ -CF ₂ CF ₂ -)	423-02-9
Perfluorodecalin (cis or trans, trans shown)	C ₁₀ F ₁₈ (see structure below)	306-94-5

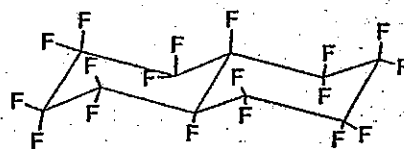

Perfluoromethyldecalin (cis or trans and all additional possible isomers)	C ₁₁ F ₂₀ (see structure below)	306-92-3
---	---	----------

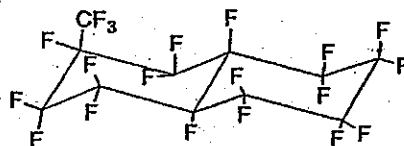

Brominated Compounds		
Bromomethane	CH ₃ Br	74-83-9
Bromofluoromethane	CH ₂ FBr	373-52-4

Bromodifluoromethane	CHF_2Br	1511-62-2
Dibromofluoromethane	CHFBr_2	1868-53-7
Tribromomethane	CHBr_3	75-25-2
Bromoethane	$\text{CH}_3\text{CH}_2\text{Br}$	74-96-4
Bromoethene	$\text{CH}_2=\text{CHBr}$	593-60-2
1,2-dibromoethane	$\text{CH}_2\text{Br}-\text{CH}_2\text{Br}$	106-93-4
1-bromo-1,2-difluoroethene	$\text{CFBr}=\text{CHF}$	358-99-6
Iodated compounds		
Iodotrifluoromethane	CF_3I	2314-97-8
Difluoroiodomethane	CHF_2I	1493-03-4
Fluoroiodomethane	CH_2FI	373-53-5
1,1,2-trifluoro-1-iodoethane	$\text{CF}_2\text{I}-\text{CH}_2\text{F}$	20705-05-9
1,1,2,2-tetrafluoro-1-iodoethane	$\text{CF}_2\text{I}-\text{CHF}_2$	354-41-6
1,1,2,2-tetrafluoro-1,2-diiodoethane	$\text{CF}_2\text{I}-\text{CF}_2\text{I}$	354-65-4
Iodopentafluorobenzene	$\text{C}_6\text{F}_5\text{I}$	827-15-6
Alcohols		
Ethanol	$\text{CH}_3-\text{CH}_2-\text{OH}$	64-17-5
n-propanol	$\text{CH}_3-\text{CH}_2-\text{CH}_2-\text{OH}$	71-23-8
Isopropanol	$\text{CH}_3-\text{CH}(\text{OH})-\text{CH}_3$	67-63-0
Aldehydes and Ketones		
Acetone (2-propanone)	$\text{CH}_3-\text{CO}-\text{CH}_3$	67-64-1
n-propanal	$\text{CH}_3-\text{CH}_2-\text{CHO}$	123-38-6
n-butanal	$\text{CH}_3-\text{CH}_2-\text{CH}_2-\text{CHO}$	123-72-8
Methyl ethyl ketone (2-butanone)	$\text{CH}_3-\text{CO}-\text{CH}_2-\text{CH}_3$	78-93-3
Other		
Nitrous oxide	N_2O	10024-97-2

The compounds listed in Table 1 are available commercially (from chemical supply houses, such as Aldrich, Milwaukee, WI) or may be prepared by processes known in the art.

Single tracer compounds may be used in combination with a refrigeration/heating fluid in the compositions of the present invention or

multiple tracer compounds may be combined in any proportion to serve as a tracer blend. The tracer blend may contain multiple tracer compounds from the same class of compounds or multiple tracer compounds from different classes of compounds. For example, a tracer blend may contain
5 2 or more deuterated hydrofluorocarbons, or one deuterated hydrofluorocarbon in combination with one or more perfluorocarbons.

Additionally, some of the compounds in Table 1 exist as multiple isomers, structural or optical. Single isomers or multiple isomers of the same compound may be used in any proportion to prepare the tracer
10 compound. Further, single or multiple isomers of a given compound may be combined in any proportion with any number of other compounds to serve as a tracer blend.

The tracer-containing refrigerant compositions of the present invention may be prepared by any convenient method to combine the
15 desired amount of the individual components. A preferred method is to weigh the desired component amounts and thereafter combine the components in an appropriate vessel. Agitation may be used, if desired.

By "analytically detectable" is meant that the tracer or tracer blend may be detected by any analytical method capable of differentiating the tracer from the refrigeration/heating fluid or capable of determining the
20 quantity of tracer present. In the case where a dilution of the tracer-containing composition may have occurred, the tracer compound may be present in a lesser quantity than originally added to the refrigeration/heating fluid. Analytical detection of the lesser quantity would
25 aid the refrigeration industry. Such detection is capable of alerting the industry to the occurrence of dilution, adulteration, or contamination. Additionally, manufacturers, distributors and purchasers would be able to verify or authenticate the source (ie., supplier) of the refrigerant composition by comparing any quantity of detected tracer to the quantity
30 that was intentionally combined with refrigeration/heating fluid by the source.

Gas chromatography (GC) is one analytical method that may be used to detect and quantify the tracer or tracer blend in the refrigeration/heating fluid. Any GC detector may be used that is capable
35 of detecting and quantifying the tracer compound. Such detectors include, but are not limited, to flame ionization detector (FID), thermal conductivity detector (TCD), electron-capture detector (ECD), photo-

ionization detector (PID), infrared detectors (IRD) and mass spectrometer detectors (usually referred to as GC-MS when combined with a gas chromatograph). Other analytical methods may be utilized which do not require the gas chromatographic separation prior to detection. Such
5 additional analytical methods include but are not limited to nuclear magnetic resonance (NMR) or infrared (IR) spectrometry.

When mixtures of this invention are analyzed using gas chromatography, conditions capable of identifying and quantifying the tracer in the presence of the refrigeration/heating fluid may be used. The
10 GC column used for the analysis must be chosen so as to be capable of separating the tracer compound or components of the tracer blend from the refrigeration/heating fluid. Both packed and capillary GC columns may be used. The preferred GC columns are those known to provide separation of fluorocarbon compounds from each other and classes of
15 candidate tracer compounds of the present invention.

The packed GC columns that may be useful in the present invention are from about 1 meter to about 12 meters in length. Generally, packed GC columns are constructed of stainless steel. The commercially available packed GC columns that may be useful in the present invention
20 include but are not limited to: porous polymer stationary phase, such as Porapak® Q or Porapak® T; silicone polymer stationary phases, such as SP®-1000 on Carbowax® B support or SP®-2100 (methyl silicone) on Supelcoport® support, perfluorinated polymer stationary phase, Fluorcol® on Carbowax® B support; and polyethylene glycol stationary phases,
25 such as Carbowax® on Carbowax® C support. For those packed GC columns that are packed with a polymer coated support, the polymer loading may range from about 0.1% to about 10%. Packed GC columns listed here are available from Supelco (Bellefonte, PA).

Capillary GC columns which are found useful in the present
30 invention are available commercially. Capillary columns may vary in length from about 10 meters to about 105 meters, but may also be longer if two or more columns are joined together (e.g. 120 meters by joining two 60 meter capillary GC columns). The capillary GC columns that may be of use in the present invention are generally constructed of fused silica
35 tubing and vary in inner diameter (ID) from about 0.1 millimeter to about 0.53 millimeter. The stationary phase for the capillary GC columns is coated on the interior surface of the column and may vary in thickness

from about 0.1 micrometer to about 5 micrometers. The stationary phases that may be of use in the present invention, include but are not limited to the commercially available liquid polymer phases: RT_x[®]-1 ((Crossbond[®] 100% dimethyl polysiloxane), RT_x[®]-200 (Crossbond[®] trifluoropropylmethyl polysiloxane), RT_x[®]-1301 (Crossbond[®] 6% cyanopropylphenyl/94% dimethyl polysiloxane), RT_x[®]-1701 (Crossbond[®] 14% cyanopropylphenyl/86% dimethyl polysiloxane) from Restek Corporation (Bellefonte, PA). Porous layer open tubular (PLOT) capillary columns may also be useful in the present invention. Such PLOT capillary GC columns include, but are not limited to, the CP-PoraPLOT[®] Q (100% styrene divinylbenzene) column from Varian Chrompack (Middelburg, The Netherlands).

Temperature and pressure conditions for the GC analysis will vary depending upon the refrigeration/heating fluid and the tracer being used in the composition. Cryogenic temperatures (sub-ambient, requiring liquid nitrogen, dry ice or liquid carbon dioxide) may be used in order to provide separation of low boiling components (either refrigeration/heating fluid or tracer compound(s)), when necessary.

Tracer compounds or blends may be present in concentrations that are detectable by whichever analytical method is chosen. Additionally, the tracer concentration must be chosen such that the quantity of tracer or tracer blend does not interfere with the performance of the refrigeration/heating fluid. The tracer compound or tracer blend may be present at a total concentration of about 50 parts per million by weight (ppm) to about 1000 ppm. Preferably, the tracer compound or tracer blend is present at a total concentration of about 50 ppm to about 500 ppm and most preferably, the tracer compound or tracer blend is present at a total concentration of about 100 ppm to about 300 ppm.

The present invention further relates to a method of using the present inventive tracer-containing refrigerant compositions, said method comprising combining said tracer compound with said refrigeration/heating fluid to make a tracer-containing refrigerant composition, and detecting the presence of said tracer compound in said tracer-containing refrigerant composition. The present method is useful to (i) determine the occurrence of dilution, adulteration or contamination or (ii) verify the source of the refrigerant composition of said composition.

The present invention further relates to a method of using the present inventive tracer-containing refrigerant composition, said method comprising: (i) producing refrigeration by evaporating the tracer-containing refrigerant composition in the vicinity of a body to be cooled and thereafter condensing said composition; or (ii) producing heat by condensing the tracer-containing refrigerant composition in the vicinity of the body to be heated and thereafter evaporating said composition.

Vapor-compression refrigeration systems include an evaporator, a compressor, a condenser, a liquid storage receiver and an expansion device. A vapor-compression cycle re-uses refrigerant in multiple steps producing a cooling effect in one step and a heating effect in a different step. The cycle can be described simply as follows. Liquid refrigerant enters an evaporator through an expansion device, and the liquid refrigerant boils in the evaporator at a low temperature to form a gas and produce cooling. The low-pressure gas enters a compressor where the gas is compressed to raise its pressure and temperature. The high-pressure gaseous refrigerant then enters the condenser in which the refrigerant condenses and discharges its heat to the environment. The refrigerant returns to the expansion device through which the liquid expands from the high-pressure level in the condenser to the low-pressure level in the evaporator, thus repeating the cycle.

EXAMPLES

Tracer-containing refrigerant compositions of the present invention were prepared and then analyzed using several different GC columns under differing conditions of analysis. The retention times for the refrigeration/heating fluid and tracer compounds were determined and are given for each example. It should be noted that exact retention times determined on a specific gas chromatograph and with a specific GC column will vary slightly from retention times determined from a different instrument and column.

All samples were analyzed on Agilent 6890 Gas Chromatographs and the data collected and processed by Agilent Chemstation® software, both available from Agilent Technologies (Palo Alto, CA).

EXAMPLE 1

A sample of R-22 (refrigerant HCFC-22, chlorodifluoromethane) was spiked with 100 parts per million (ppm by weight) of PFC-C318 (perfluorocyclobutane). The sample was then analyzed by GC using the conditions described below:

Column: RT_x[®]-1701 (Crossbond[®] 14% cyanopropylphenyl/86% dimethyl polysiloxane)

Length: 105 meters

Inner diameter: 0.25 millimeters

Stationary phase film thickness: 0.25 micrometers

Carrier gas and flow rate: He, 1.0 milliliter/minute

Oven temperature:

Initial temperature: -20 °C

Initial hold time: 15 minutes

Temperature ramp rate: 10 °C/minute

Final temperature: 50 °C

Final hold time: 0 minutes (no final hold time)

Detector: Flame ionization detector (FID)

Temperature: 250 °C

Hydrogen flow rate: 42 milliliter/minute

Airflow rate: 450 milliliter/minute

Injection port: Split

Temperature: 150 °C

Head pressure: 22 psi

Sample type: vapor, manual syringe injection

Sample size: 1.0 milliliter

Split ratio: 50:1

The retention times for the refrigerant, R-22, and tracer, PFC-C318, are given in Table 2.

TABLE 2

Compound	Retention time (R _t , minutes)
PFC-C318 (tracer)	11.07
R-22 (refrigerant)	12.53

EXAMPLE 2

A sample of R-134a (refrigerant HFC-134a, 1,1,1,2-tetrafluoroethane) was spiked with 100 parts per million (ppm by weight) of

HFC-236fa (1,1,1,3,3,3-hexafluoropropane). The sample was then analyzed by GC using the conditions described below:

Column: RT_x-1[®] (Crossbond[®] 100% dimethyl polysiloxane)

Length: 105 meters
Inner diameter: 0.25 millimeters
Stationary phase film thickness: 1.0 micrometers

Carrier gas and flow rate: helium, 0.75 milliliter/minute.

Oven temperature:

Initial temperature: -20 °C
Initial hold time: 13 minutes
Temperature ramp rate: 5 °C/minute
Final temperature: 50 °C
Final hold time: 10 minutes

Detector: Flame ionization detector (FID)

Temperature: 250 °C
Hydrogen pressure: 20 psi
Air pressure: 45 psi

Injection port: Split

Temperature: 175 °C
Head pressure: 38 psi
Sample type: vapor, manual syringe injection
Sample size: 1.0 milliliter
Split ratio: 75:1

The retention times for the refrigerant, R-134a, and tracer, HFC-236fa, are given in Table 3.

TABLE 3

Compound	Retention time (R _t , minutes)
R-134a (refrigerant)	10.76
HFC-236fa (tracer)	12.04

EXAMPLE 3

A sample of R-410A (refrigerant blend, 50 weight percent R-32, difluoromethane, and 50 weight percent R-125, pentafluoroethane) was

spiked with 100 parts per million (ppm by weight) of HFE-236fa (1-trifluoromethoxy-2,2,2-trifluoroethane). The sample was then analyzed by GC using the conditions described below:

5 Column: 5% Fluorcol® on Carbopack® B, 60/80 mesh
 Length: 20 feet (6.1 meters)
 Diameter: 1/8 inch (0.32 centimeter)

10 Carrier gas and flow rate: helium, 30 milliliter/minute

Oven temperature:

Initial temperature: 60 °C
 Initial hold time: 3 minutes
 Temperature ramp rate: 8 °C/minute
 15 Final temperature: 180 °C
 Final hold time: 10 minutes

Detector: flame ionization detector (FID)

20 Temperature: 250 °C
 Hydrogen pressure: 20 psi
 Air pressure: 45 psi

Injection port: Packed

25 Temperature: 250 °C
 Head pressure: 67 psi
 Sample type: vapor, sample valve injection
 Sample size: 50 microliter

30 The retention times for the refrigerant, R-410A or specifically, R-32 and R-125, and tracer, HFE-236fa, are given in Table 4.

TABLE 4

Compound	Retention time (R _t , minutes)
R-32 (refrigerant)	2.52
R-125 (refrigerant)	3.90
HFE-236fa (tracer)	10.87

CLAIM(S)

What is claimed is :

1. A tracer-containing composition, said composition comprising a refrigeration/heating fluid and at least one tracer compound, said tracer compound being analytically detectable and selected from the group consisting of hydrofluorocarbons, deuterated hydrofluorocarbons, deuterated hydrocarbons, perfluorocarbons, fluoroethers, brominated compounds, iodated compounds, alcohols, aldehydes and ketones, nitrous oxide and combinations thereof with the proviso that said refrigeration/heating fluid is different from said tracer compound.
2. The tracer-containing composition according to claim 1, wherein said refrigeration/heating fluid comprises hydrofluorocarbons, hydrochlorofluorocarbons, perfluorocarbons, fluorocarbon ethers, hydrocarbons, carbon dioxide, ammonia or mixtures thereof.
3. The tracer-containing composition according to claim 1, wherein said composition comprises a single tracer compound.
4. The tracer-containing composition according to claim 1, wherein said composition comprises a tracer blend.
5. The tracer-containing composition of claim 1 wherein at least one of said tracer compounds is present as a single pre-determined isomer.
6. The tracer-containing composition of claim 1 wherein at least one of said tracer compound is present as multiple pre-determined isomers.
7. The tracer-containing composition according to claim 1, wherein said composition comprises a tracer compound or tracer blend in an amount ranging from about 50 ppm to about 1000 ppm.

8. The tracer-containing composition according to claim 7, wherein said composition comprises a tracer compound or tracer blend in an amount ranging from about 50 ppm to about 500 ppm.
- 5 9. The tracer-containing composition according to claim 8, wherein said composition comprises a tracer compound or tracer blend in an amount ranging from about 100 ppm to about 300 ppm.
- 10 10. The tracer-containing composition according to claim 1, wherein the tracer compound is at least one compound selected from PFC-116, PFC-C216, PFC-218, PFC-C318, PFC-31-10mc, PFC-31-10my, PFC-C51-12mycm, PFC-C51-12mym, trans, PFC-C51-12mym, cis, HFOC-125E, HFOC-134aE, HFOC-143aE, HFOC-227eaE, HFOC-236faE, HFOC-245faE $\beta\gamma$ or HFOC-245faE $\alpha\beta$, HFOC-245cbE $\beta\gamma$ or HFOC-245cb $\alpha\beta$, HFE-42-11mcc (or Freon® E1), Freon® E2, HFC-23, HFC-161, HFC-152a, HFC-134, HFC-227ea, HFC-227ca, HFC-236cb, HFC-236ea, HFC-236fa, HFC-245cb, HFC-245fa, HFC-254cb, HFC-254eb, HFC-263fb, HFC-272ca, HFC-281ea, HFC-281fa, HFC-329p, HFC-329mmz, HFC-338mf, HFC-338pcc, HFC-347s, HFC-43-10mee, PFC-116, PFC-C216, PFC-218, PFC-C318, PFC-31-10mc, PFC-31-10my, PFC-C51-12mycm, PFC-C51-12mym, trans, PFC-C51-12mym, cis, Perfluoromethylcyclopentane, Perfluoromethylcyclohexane, Perfluorodimethylcyclohexane (ortho, meta, or para), Perfluoroethylcyclohexane, Perfluoroindan, Perfluorotrimethylcyclohexane and isomers thereof, Perfluoroisopropylcyclohexane, cis-Perfluorodecalin, trans-Perfluorodecalin, cis- or trans- Perfluoromethyldecalin and isomers thereof, Bromomethane, Bromofluoromethane, Bromodifluoromethane, Dibromofluoromethane, Tribromomethane, Bromoethane, Bromoethene, 1,2-dibromoethane, 1-bromo-1,2-difluoroethene, Iodotrifluoromethane, Difluoroiodomethane, Fluoroiodomethane, 1,1,2-trifluoro-1-iodoethane, 1,1,2,2-tetrafluoro-1-iodoethane, 1,1,2,2-tetrafluoro-1,2-diiodoethane, Iodopentafluorobenzene, Ethanol, n-propanol, Isopropanol, Acetone (2-propanone), n-propanal, n-butanal, Methyl ethyl ketone (2-butanone), Nitrous oxide, and combinations thereof.

11. A method of using the tracer-containing composition of claim 1,5 or 6, said method comprising: combining said tracer compound with said refrigeration/heating fluid to make a tracer-containing refrigerant composition, and detecting said tracer compound in said tracer-containing refrigerant composition.
12. The method of claim 11 wherein said detecting comprises detecting the presence of said tracer, detecting the quantity of said tracer, or both presence and quantity of said tracer compound.
13. A method of producing refrigeration using the tracer-containing composition of claim 1,5 or 6, said method comprising: evaporating the tracer-containing composition in the vicinity of a body to be cooled and thereafter condensing said composition.
14. A method of producing refrigeration using the tracer-containing composition of claim 1,5 or 6, said method comprising: condensing the tracer-containing composition in the vicinity of the body to be heated and thereafter evaporating said composition.
15. A method for making the tracer-containing composition of claim 1, said method comprising: combining a refrigeration/heating fluid with a tracer compound selected from the group consisting of hydrofluorocarbons, deuterated hydrofluorocarbons, perfluorocarbons, fluoroethers, brominated compounds, iodated compounds, alcohols, aldehydes, ketones, nitrous oxide and combinations thereof.