



(43) International Publication Date
2 July 2015 (02.07.2015)

- (51) International Patent Classification:
G02B 3/08 (2006.01) *G02B 19/00* (2006.01)
F21V 5/04 (2006.01)
- (21) International Application Number:
PCT/NL2014/050906
- (22) International Filing Date:
24 December 2014 (24.12.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2012030 27 December 2013 (27.12.2013) NL
14/261,398 24 April 2014 (24.04.2014) US
- (71) Applicant: ORGA HOLDING B.V. [NL/NL]; Strickledeweg 13, NL-3125 AT Schiedam (NL).
- (72) Inventor: DE JAGER, Maarten Johannes; c/o Strickledeweg 13, NL-3125 AT Schiedam (NL).
- (74) Agent: JANSEN, C.M.; V.O., Johan de Wittlaan 7, NL-2517 JR Den Haag (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LI, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: BEACON LIGHT OPTIC, BEACON LIGHT

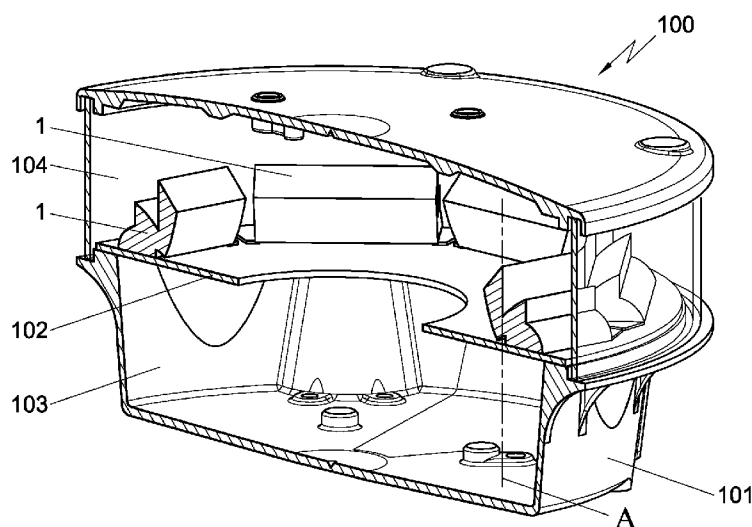


FIG. 4B

(57) Abstract: A beacon light optic comprising a plurality of light emitting elements and a light transmitting element arranged above it. The light received in the light transmitting element is divided in at least two beams, each following a different path through their respective segment and being directed to the exit surface of the respective segment. The beacon light optic thus emits light in an angular distribution in a horizontal plane and with a small vertical beam spread.