

18/12/02
2002079606

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2001 (27.12.2001)

PCT

(10) International Publication Number
WO 01/97918 A1

(51) International Patent Classification⁷: A62C 3/02

(21) International Application Number: PCT/IB01/01102

(22) International Filing Date: 22 June 2001 (22.06.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0015541.6	23 June 2000 (23.06.2000)	GB
0015620.8	26 June 2000 (26.06.2000)	GB
0015631.5	26 June 2000 (26.06.2000)	GB
0016281.8	4 July 2000 (04.07.2000)	GB
0016279.2	4 July 2000 (04.07.2000)	GB
0018606.4	31 July 2000 (31.07.2000)	GB

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments


(71) Applicant and

(72) Inventor: DEMOLE, Frédéric, Jean-Pierre [GB/GB]; 2 Old Brompton Road, London SW7 3DQ (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FIRE EXTINGUISHING SYSTEM

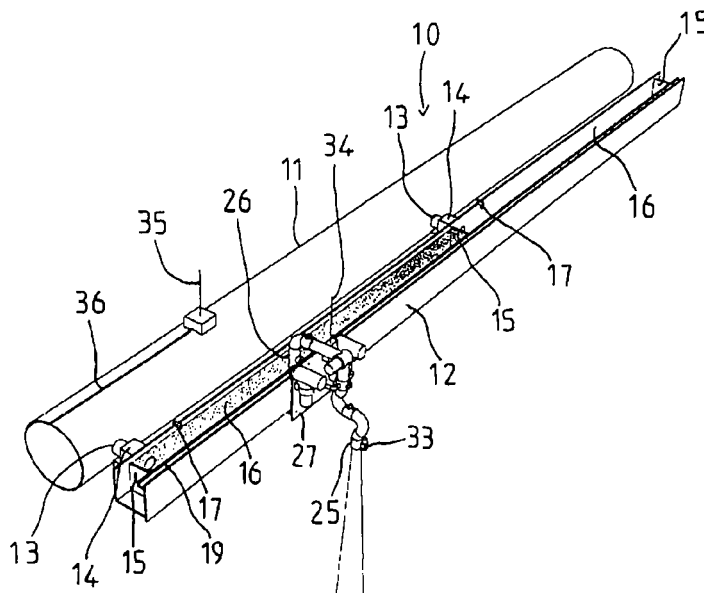

(57) Abstract: A system (10) for dousing a fire, such as a tunnel, includes a conduit (11) for delivering a fire extinguishing liquid and a trough (12) extending parallel to the conduit (11) for receiving liquid from the conduit (11). A carriage (27) is arranged to move on a track comprising an upper edge (19) of the trough (12) and the carriage (27) carries a pump having a nozzle (25), a video camera (33) and an inlet (26) each of which can be controlled robotically from a remote control station. The inlet (26) is deployed in the trough (12) to draw liquid from the trough (12). The system avoids complicated docking procedures for the pump.

WO 01/97918 A1



162162



ACTION