

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 November 2008 (20.11.2008)

PCT

(10) International Publication Number
WO 2008/141017 A1

(51) International Patent Classification:

F16L 55/48 (2006.01)

(21) International Application Number:

PCT/US2008/062811

(22) International Filing Date: 7 May 2008 (07.05.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/917,554 11 May 2007 (11.05.2007) US

12/115,611 6 May 2008 (06.05.2008) US

(71) Applicant (for all designated States except US): **TDW DELAWARE, INC.** [US/US]; 1100 Market Street, Suite 780, Wilmington, Delaware 19801 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **RANKIN, William Jack** [US/US]; 809 S. Moccasin Place, Sapulpa, Oklahoma 74066 (US).

(74) Agents: **HINRICHS, Chad M.** et al.; GableGotwals, 100 West 5th Street, 10th Floor, Tulsa, Oklahoma 74103 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AN IMPROVED PIPELINE PIG SIGNAL WITH ADJUSTABLE MOUNTING

(57) Abstract: An improved signal with adjustable mounting to allow the signal to be oriented to face any direction, without rotating the pressure-containing plug, and with integral seal to protect the outer threads of the mounting nipple.

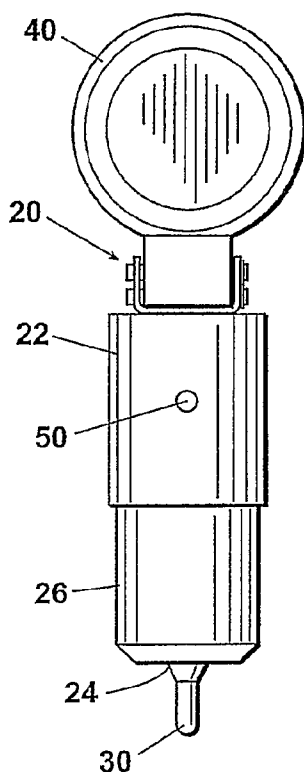


Fig. 1

WO 2008/141017 A1



Published:

— *with international search report*