




[図1]

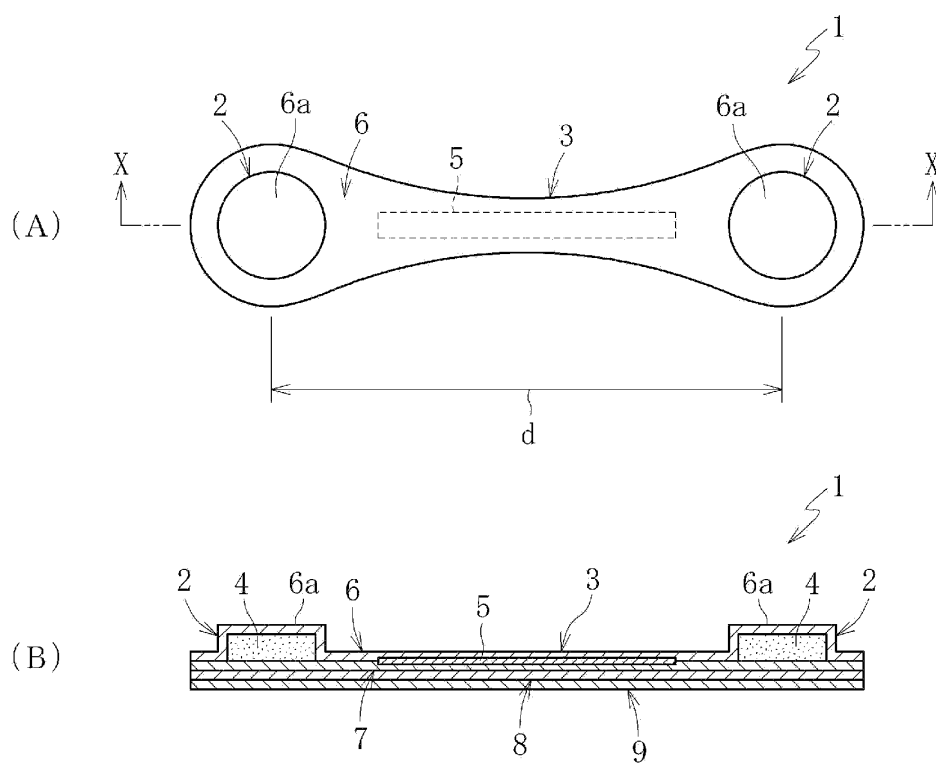


[図2]

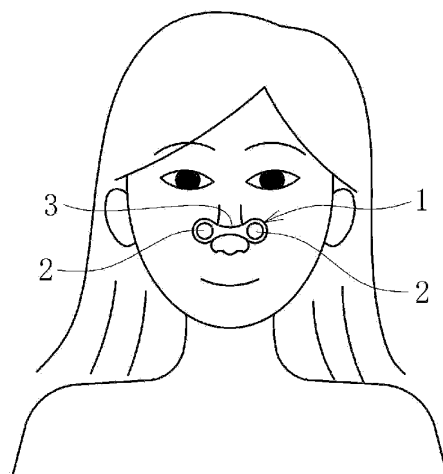

[図3]

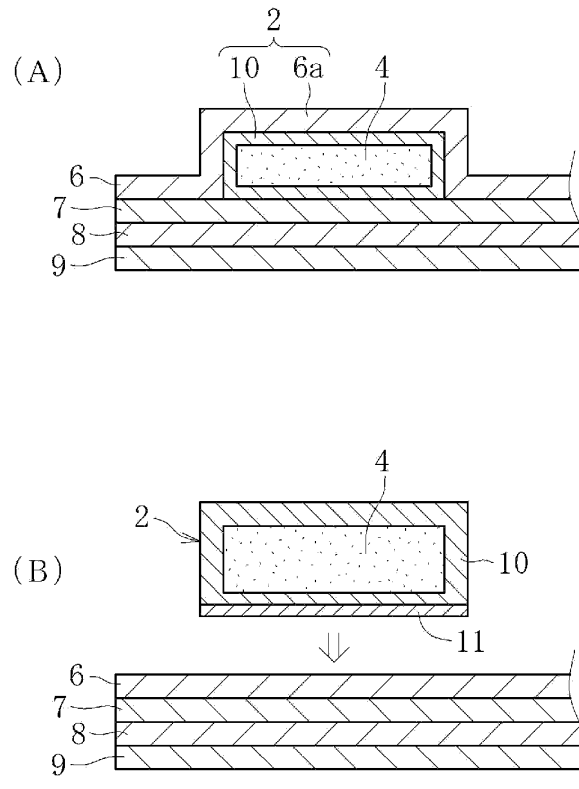


[図4]

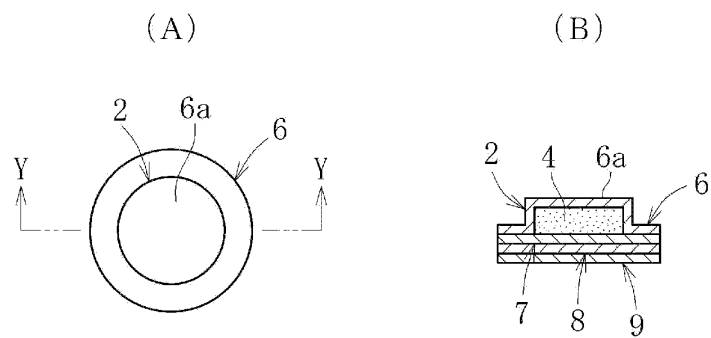


[図5]

発熱特性 サンプルNo.	1	2	3	4	5	6	7	8	9	10	平均値
立上り(秒) 31.5⇒39.9℃	30	30	40	30	30	30	30	30	30	30	31
最高温度(℃)	50.9	51.4	51.6	51.4	51.1	51.1	52.3	51.2	51.1	51.3	51.3
接続時間(分秒) 40.0℃以上	12分30秒	14分0秒	14分0秒	11分40秒	11分40秒	12分20秒	12分40秒	13分20秒	12分50秒	13分40秒	12分46秒


[図6]

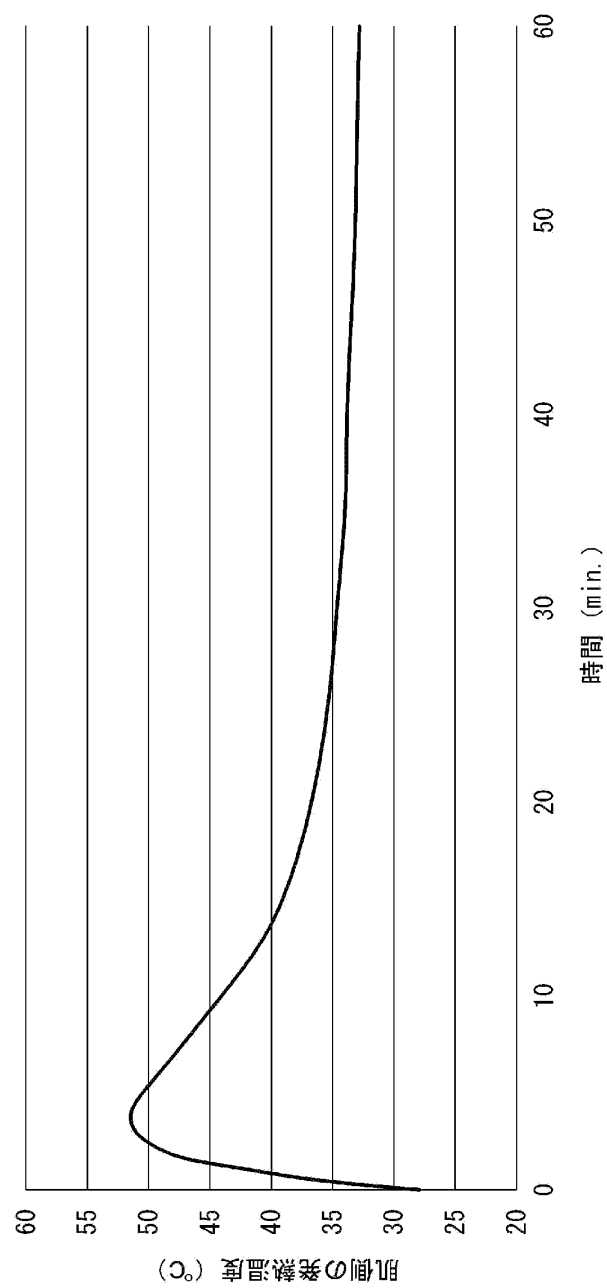

[図7]

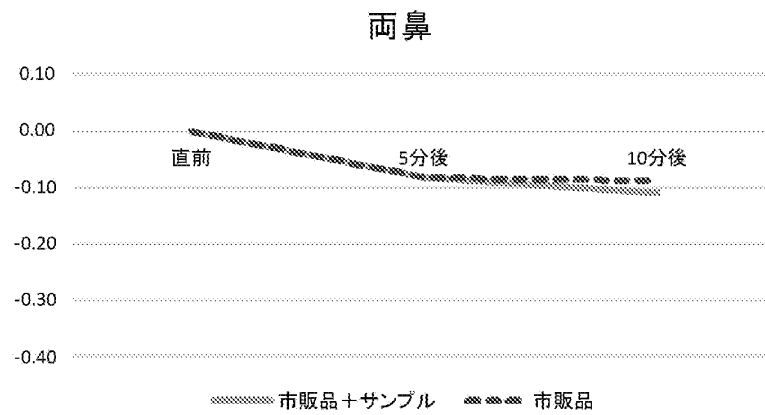

[図8]

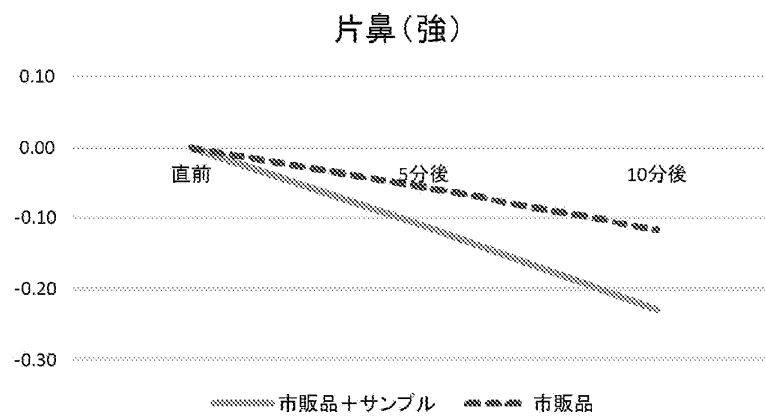

[図9]

