



- (51) International Patent Classification:
H04N 7/26 (2006.01) *H04N 21/2343* (2011.01)
- (21) International Application Number:
PCT/US2013/060412
- (22) International Filing Date:
18 September 2013 (18.09.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/705,102 24 September 2012 (24.09.2012) US
13/918,041 14 June 2013 (14.06.2013) US
- (71) Applicant: QUALCOMM INCORPORATED [US/US];
Attn: International IP Administration, 5775 Morehouse
Drive, San Diego, CA 92121-1714 (US).
- (72) Inventor: WANG, Ye-Kui; 5775 Morehouse Drive, San
Diego, CA 92121-1714 (US).
- (74) Agent: VREDEVELD, Albert, W.; Shumaker & Sieffert,
P.A., 1625 Radio Drive, Suite 300, Woodbury, MN 55125
(US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))*

[Continued on next page]

- (54) Title: HYPOTHETICAL REFERENCE DECODER PARAMETERS IN VIDEO CODING

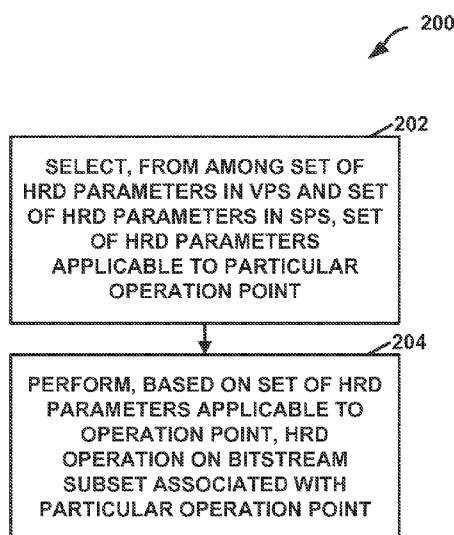


FIG. 4

- (57) Abstract: A computing device selects, from among a set of hypothetical reference decoder (HRD) parameters in a video parameter set and a set of HRD parameters in a sequence parameter set, a set of HRD parameters applicable to a particular operation point of a bitstream. The computing device performs, based at least in part on the set of HRD parameters applicable to the particular operation point, an HRD operation on a bitstream subset associated with the particular operation point.



Published:

— *with international search report (Art. 21(3))*