

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
22 May 2003 (22.05.2003)


PCT

(10) International Publication Number
WO 03/041805 A2

- (51) International Patent Classification⁷: **A62C 31/12**, B05B 3/06, 3/04
- (21) International Application Number: PCT/CA02/01744
- (22) International Filing Date:
15 November 2002 (15.11.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/987,537 15 November 2001 (15.11.2001) US
- (71) Applicant (for all designated States except US): **NATIONAL RESEARCH COUNCIL OF CANADA** [CA/CA]; 1200 Montreal Road, Ottawa, Ontario K1A 0R6 (CA).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **CRAMPTON, George** [CA/CA]; 649 Corkery Rd., Carp, Ontario K0A 1L0 (CA).
- (74) Agents: **KINSMAN, Anne, L.** et al.; Borden Ladner Gervais LLP, World Exchange Plaza, 100 Queen Street, Suite 1100, Ottawa, Ontario K1P 1J9 (CA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: ROTARY FOAM NOZZLE

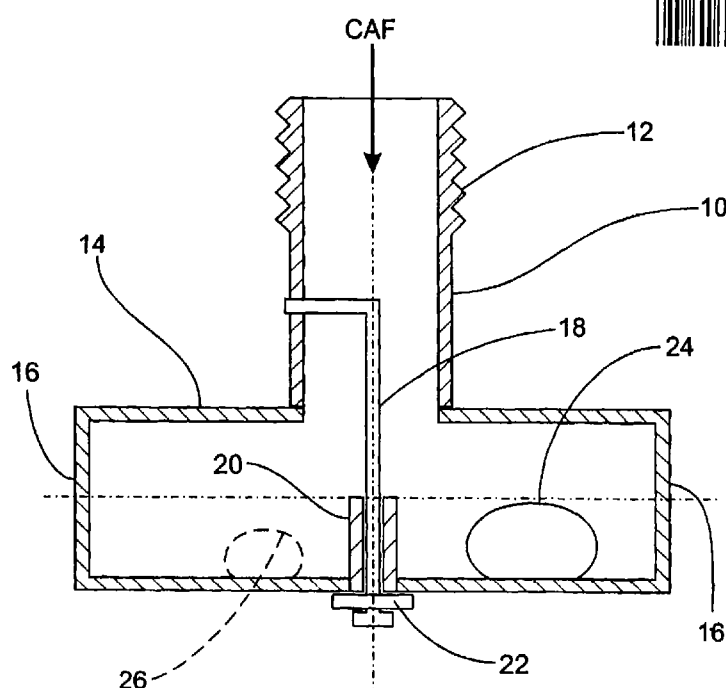

(57) Abstract: A rotary nozzle for compressed air foam (CAF) has a barrel mounted for rotation about an axis perpendicular to its longitudinal axis. The barrel is mounted to a CAF supply conduit and has a cross-sectional area substantially larger than the cross-sectional area of the conduit. Two non-equal orifices in the barrel, located on the opposite sides of the axis of rotation, distribute CAF such that it covers an almost complete, typically a circular area on the ground.

WO 03/041805 A2

WO 03/041805 A2

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.