

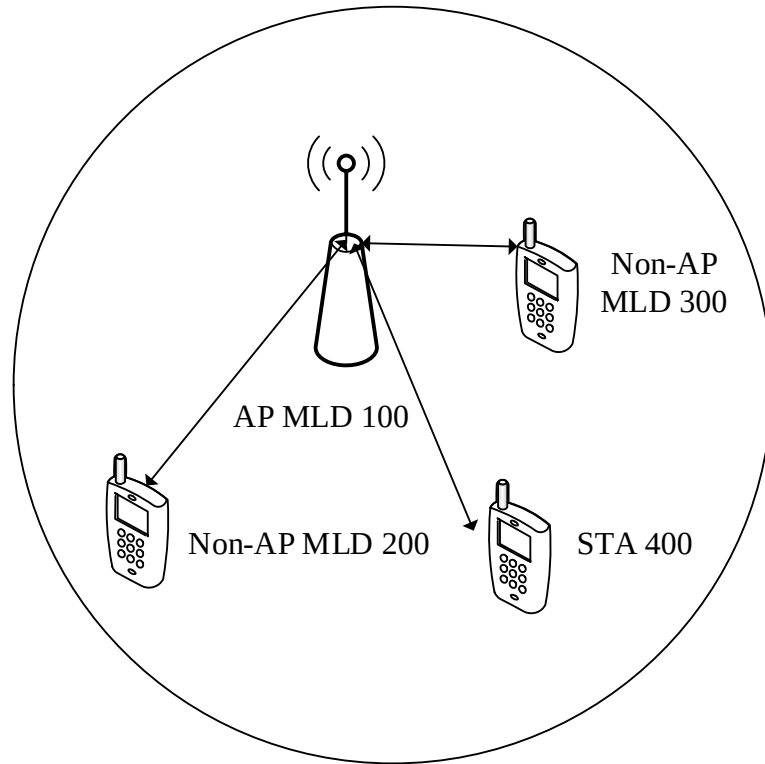


FIG. 1

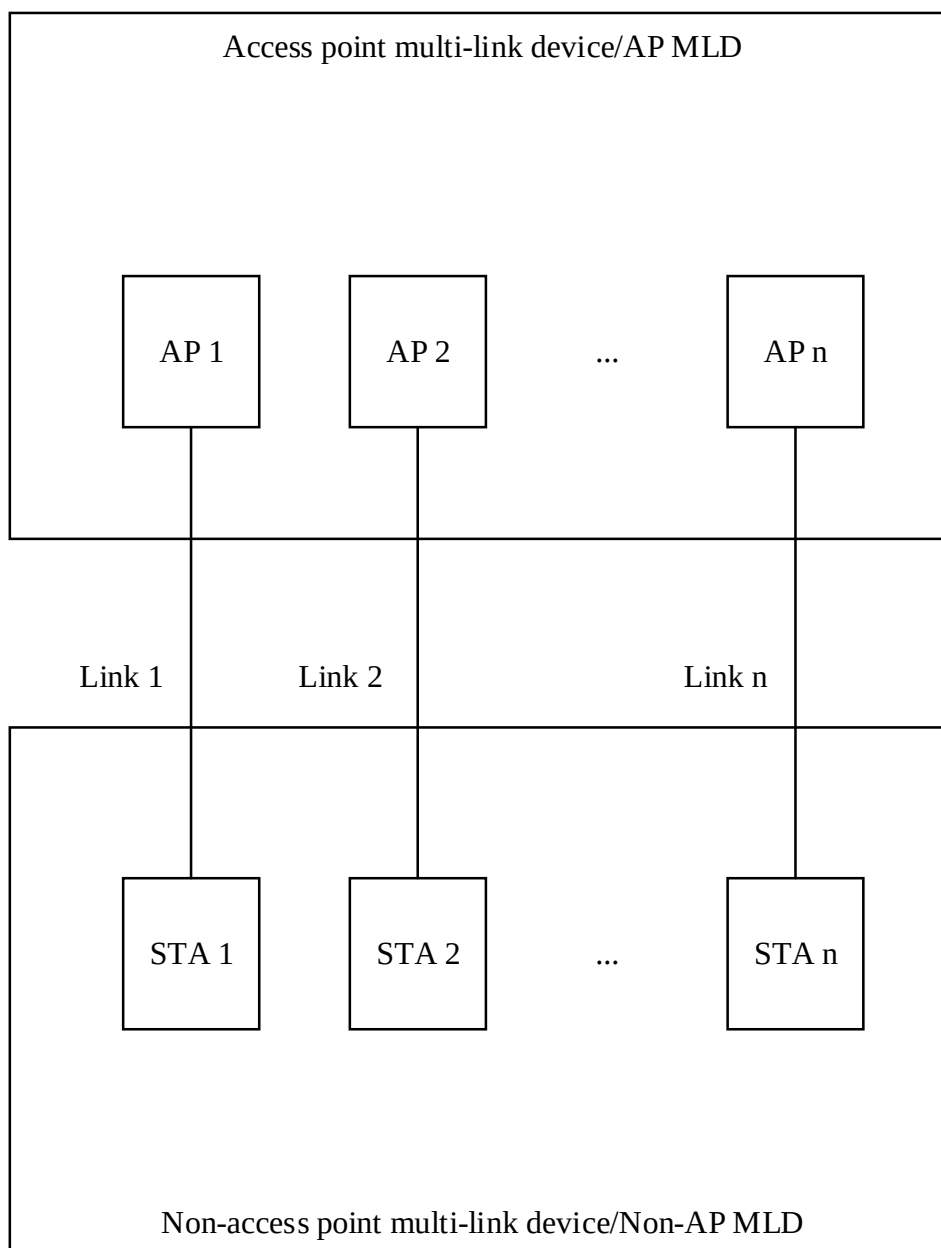


FIG. 2

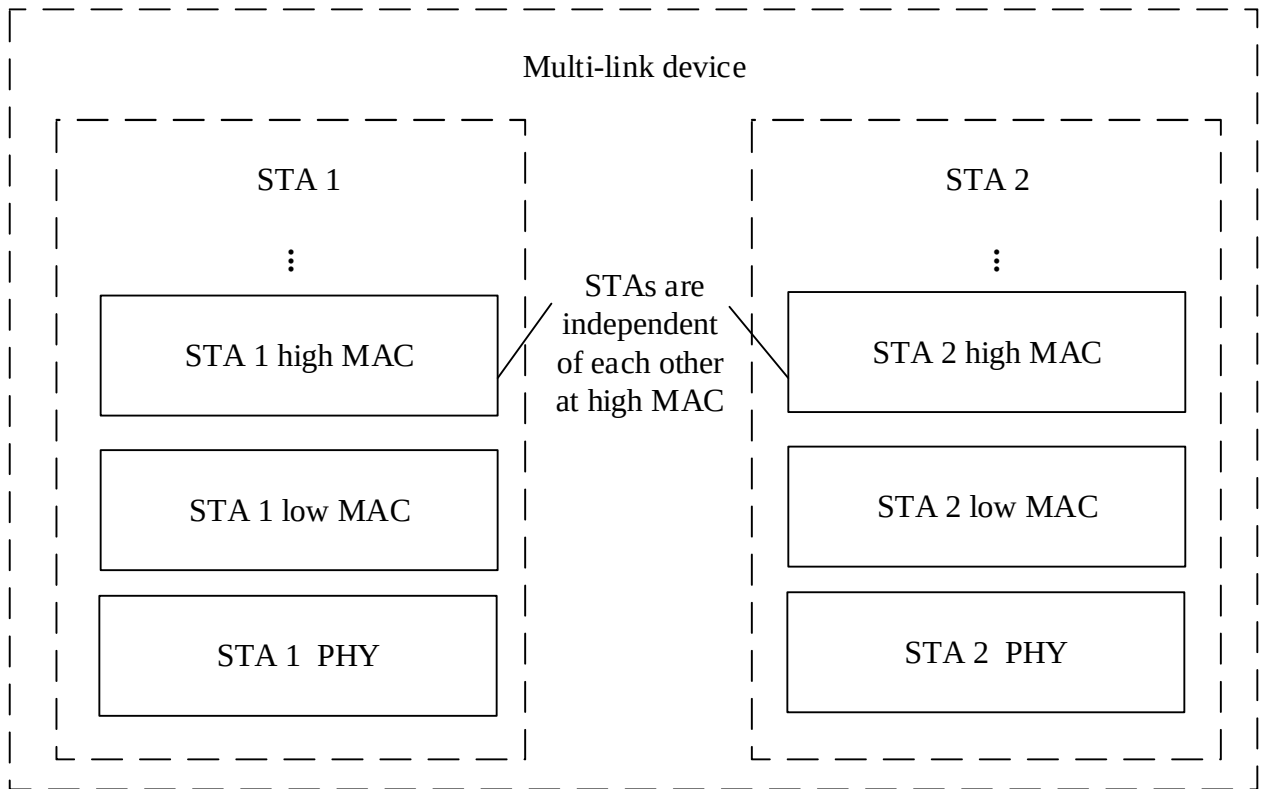


FIG. 3a

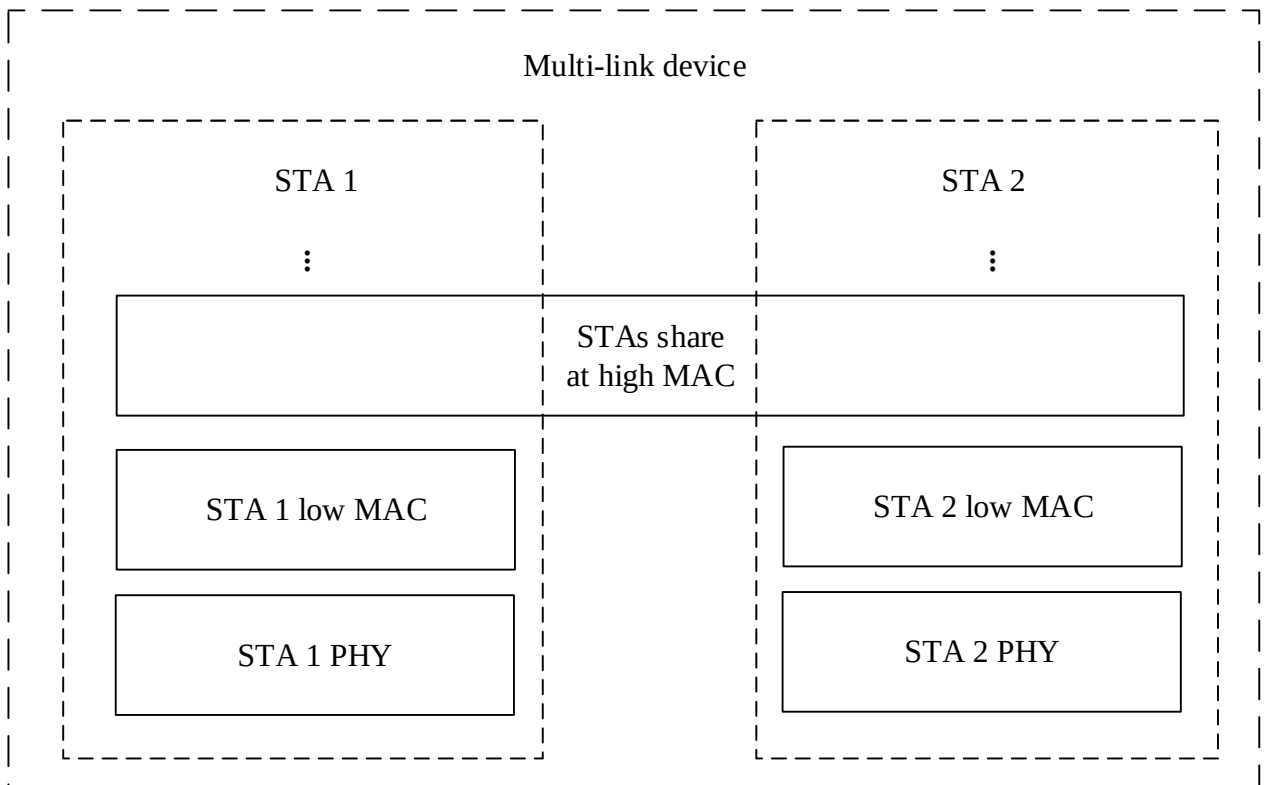


FIG. 3b

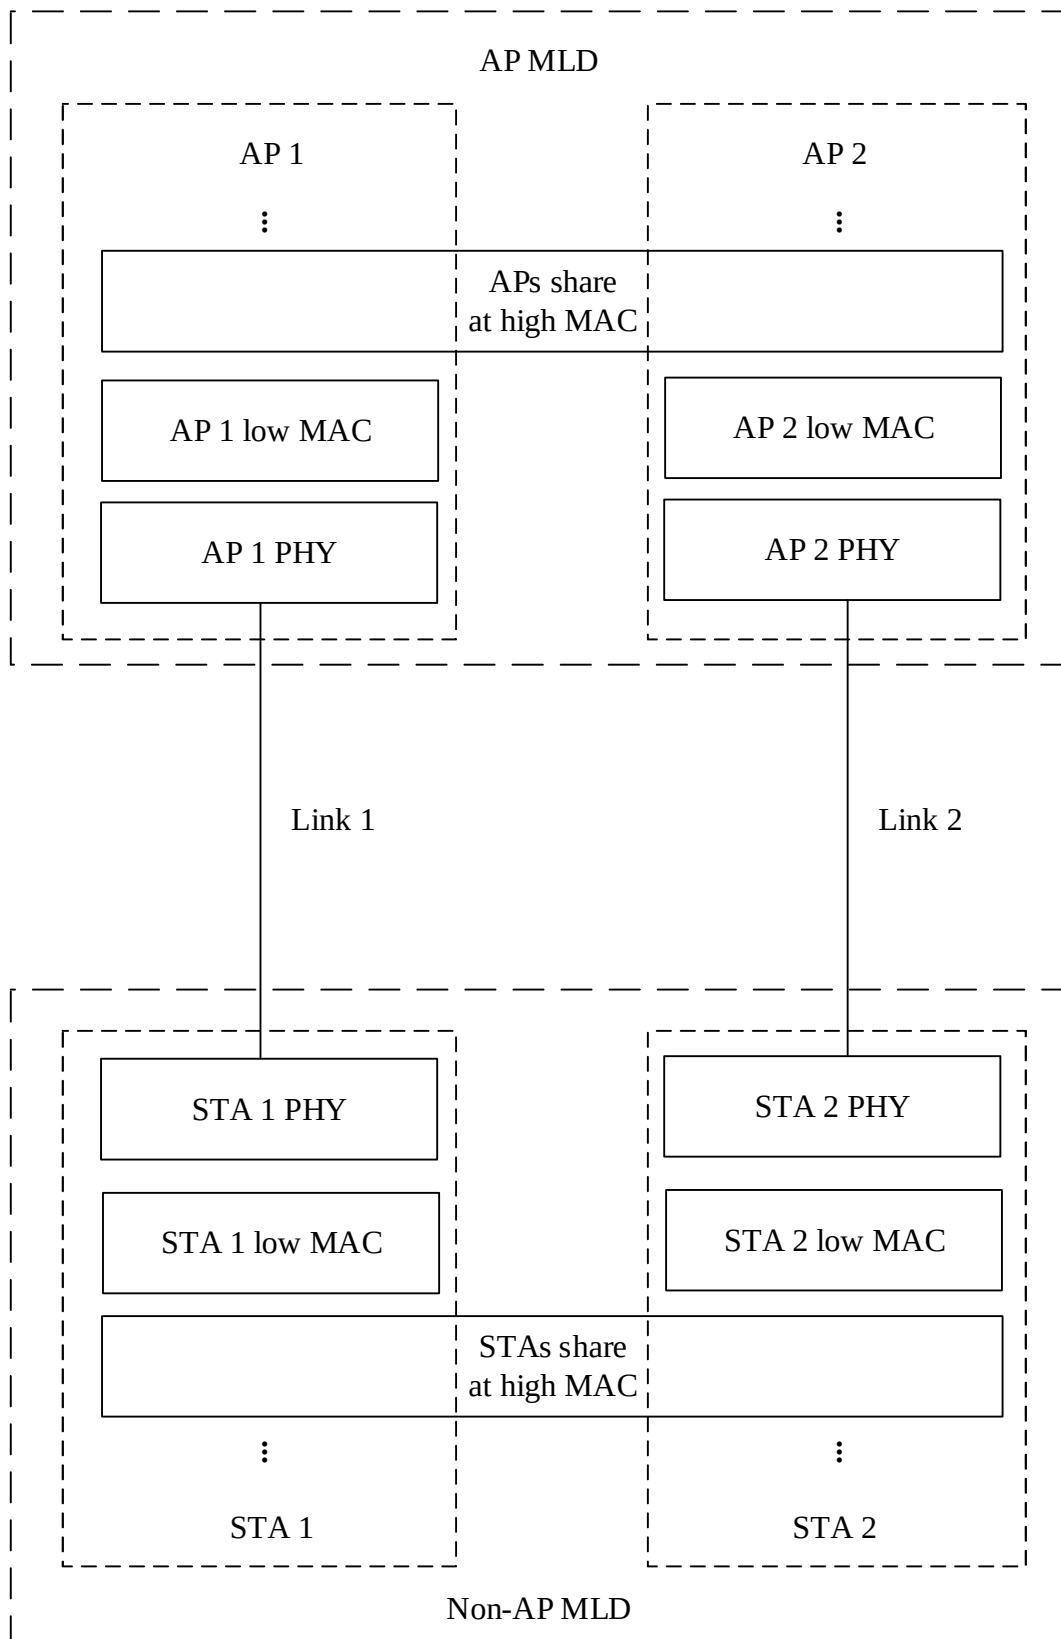


FIG. 4

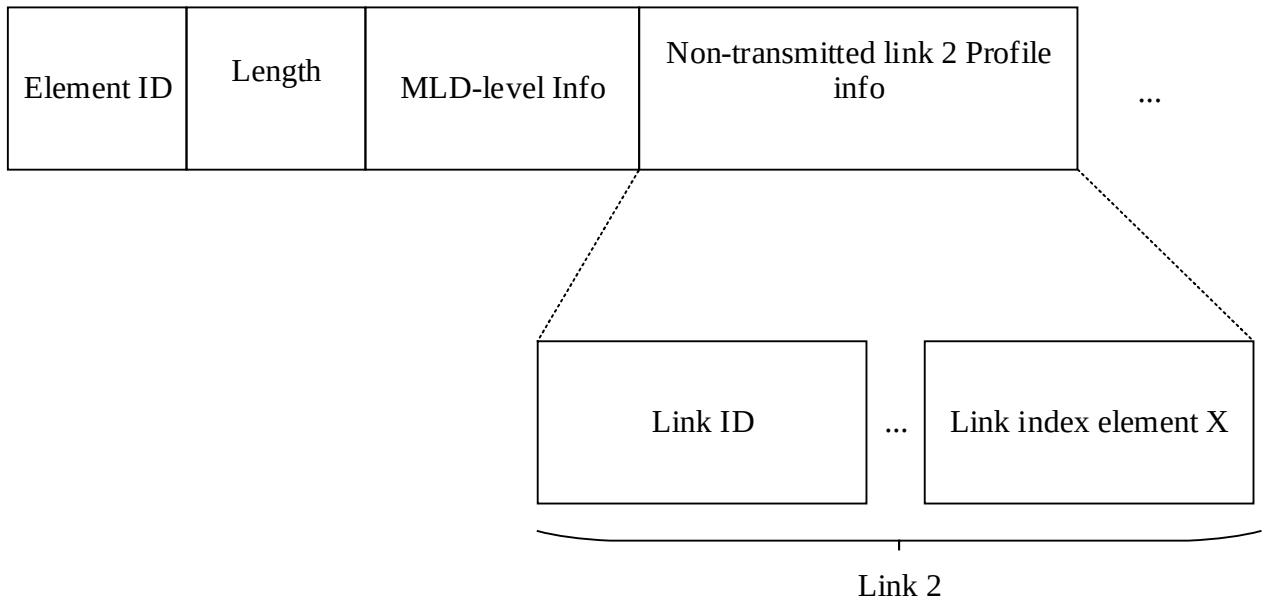


FIG. 5

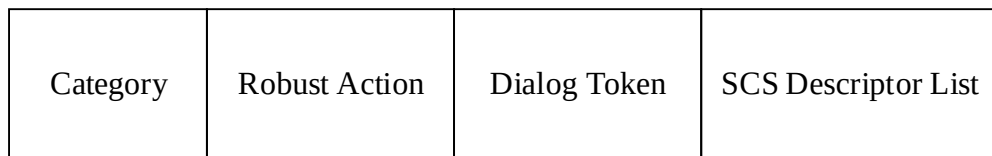


FIG. 6

Element ID	Length	SCSID	Request Type	Intra-Access Category Priority element (Optional)	TCLAS Elements (optional)	TCLAS Processing Element (optional)	TSPEC element	Optional Subelements
------------	--------	-------	--------------	---	---------------------------	-------------------------------------	---------------	----------------------

FIG. 7a

Element ID	Length	SCSID	Request Type	Intra-Access Category Priority element (Optional)	TCLAS Elements (optional)	TCLAS Processing Element (optional)	QoS Characteristic element	Optional Subelements
------------	--------	-------	--------------	---	---------------------------	-------------------------------------	----------------------------	----------------------

FIG. 7b

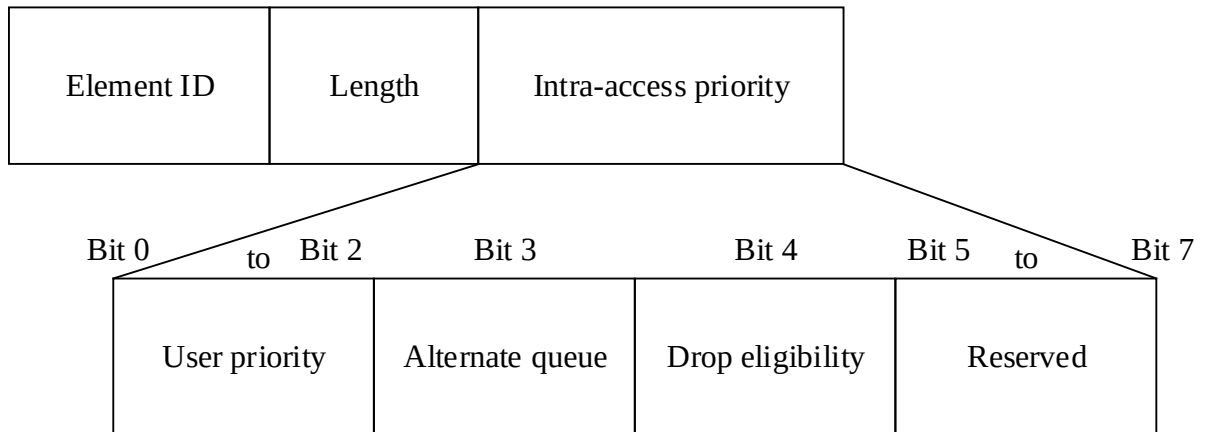


FIG. 8

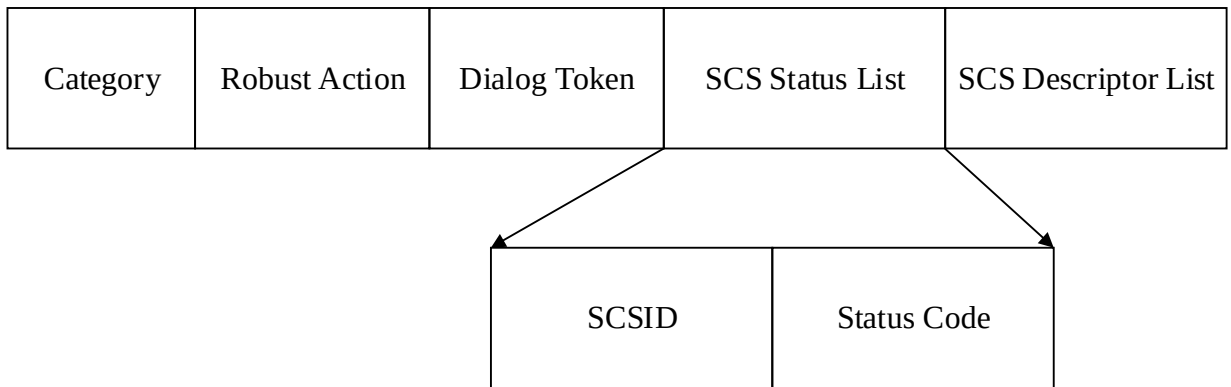


FIG. 9

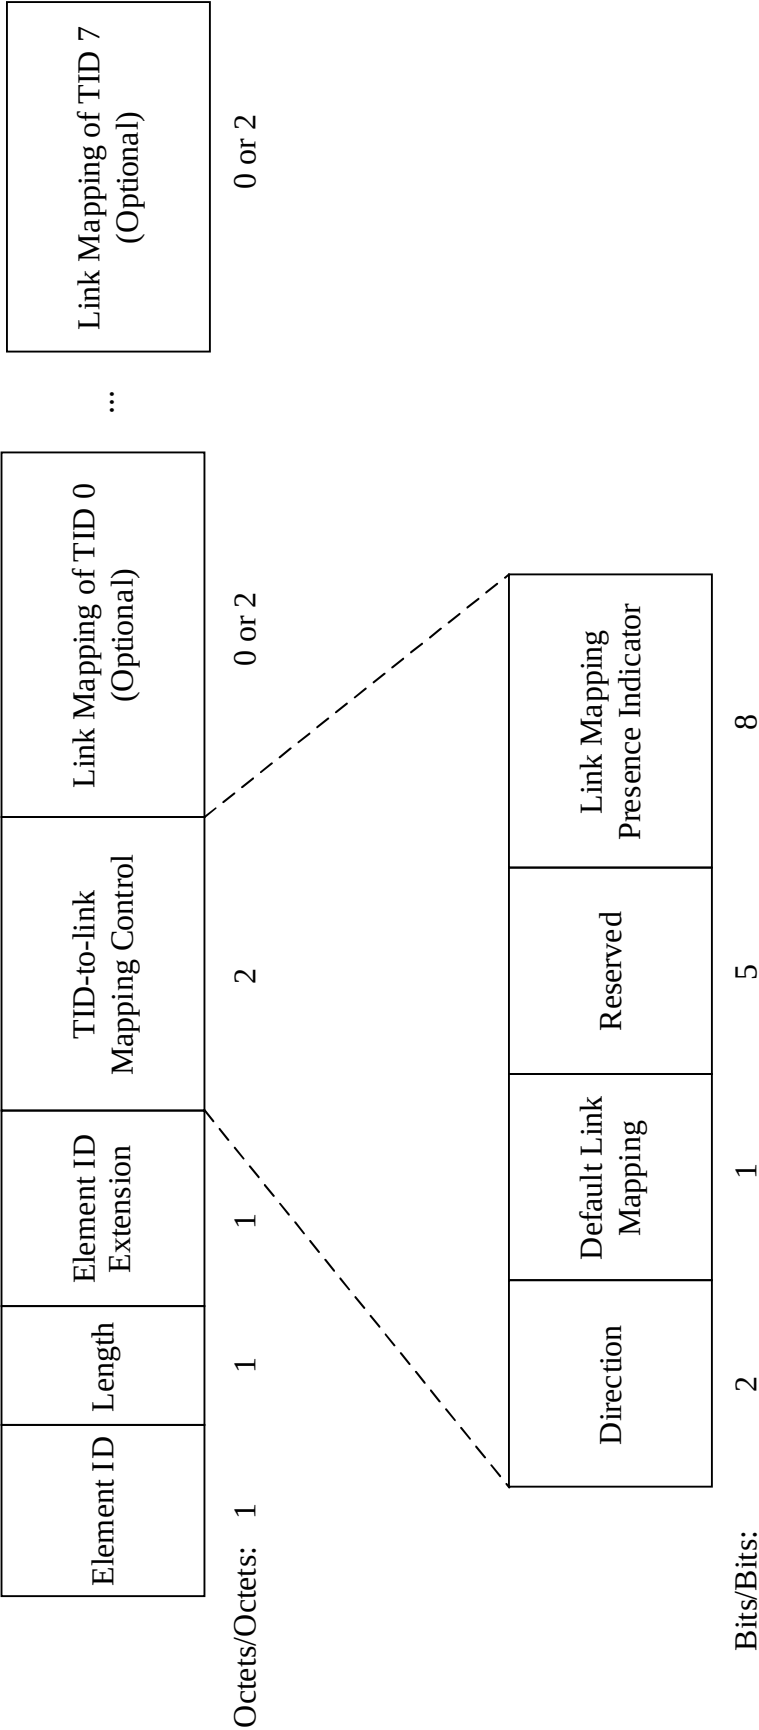


FIG. 10

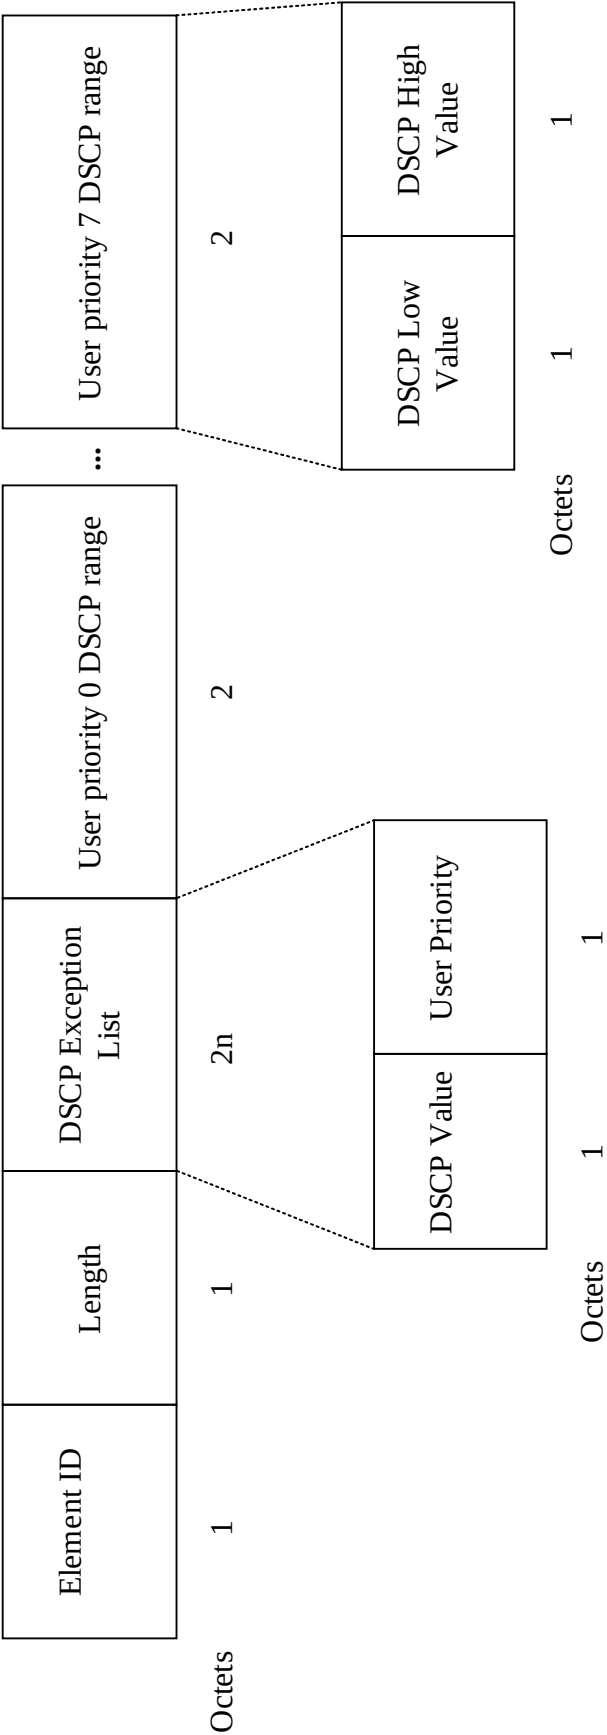


FIG. 11

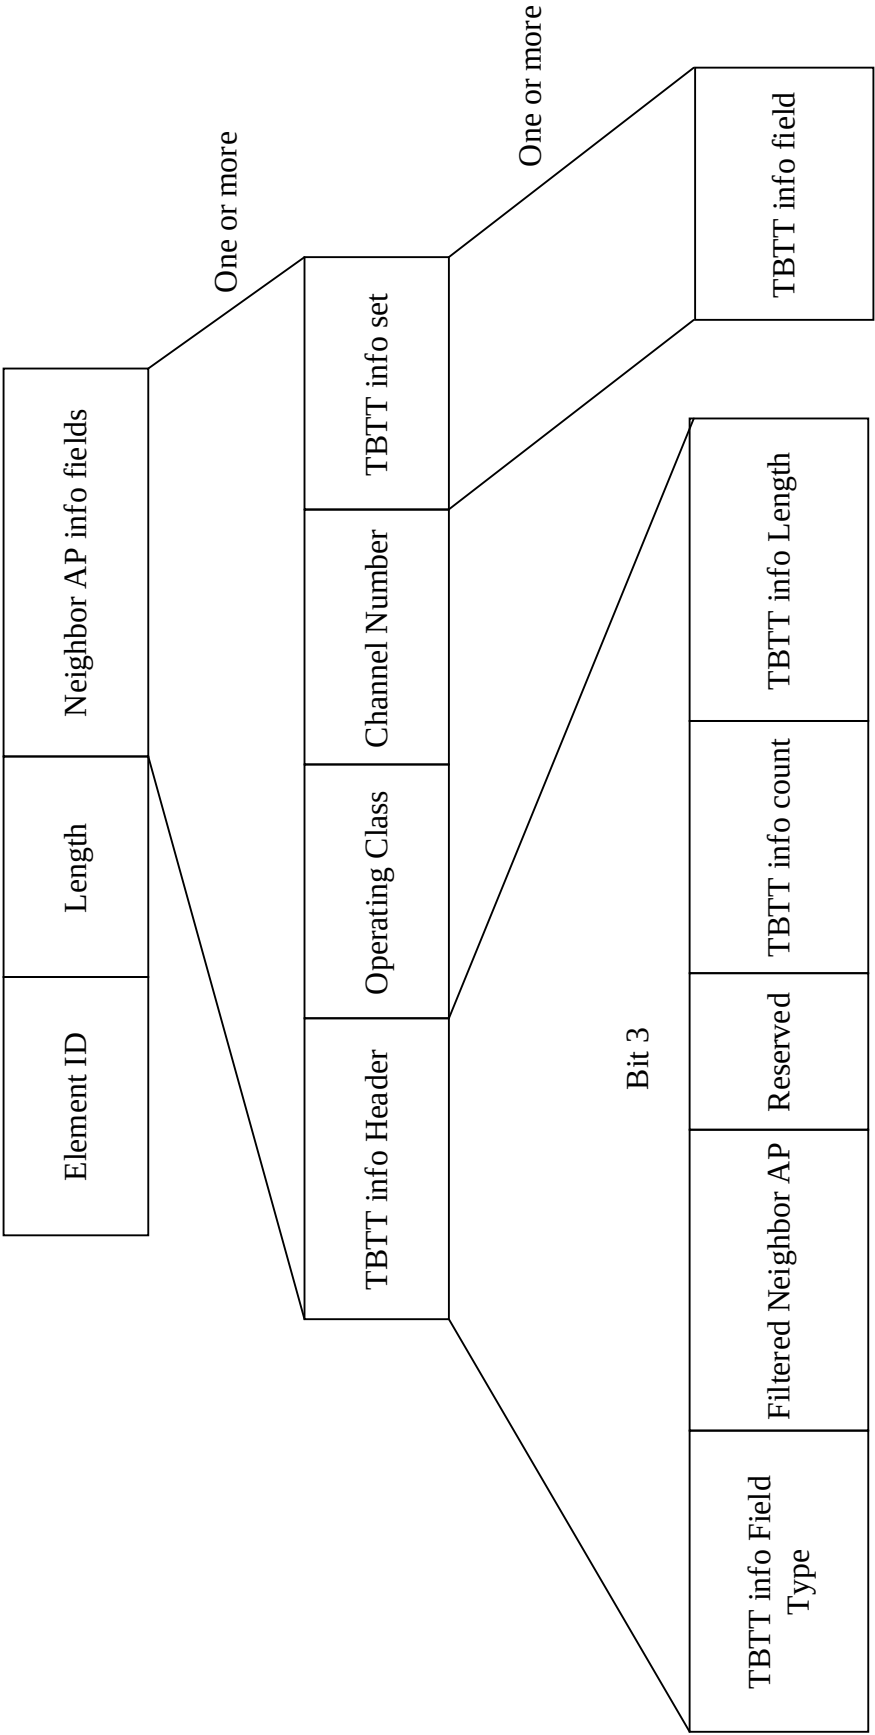


FIG. 12

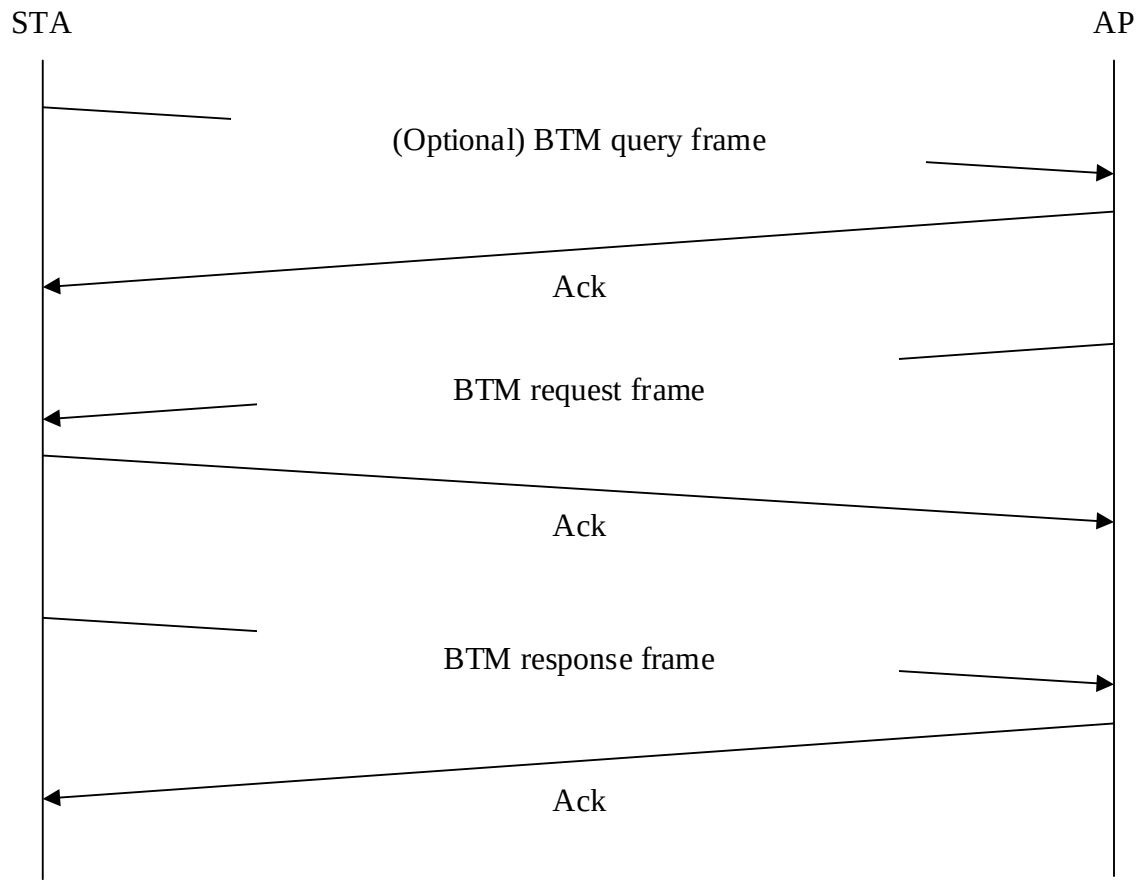


FIG. 13

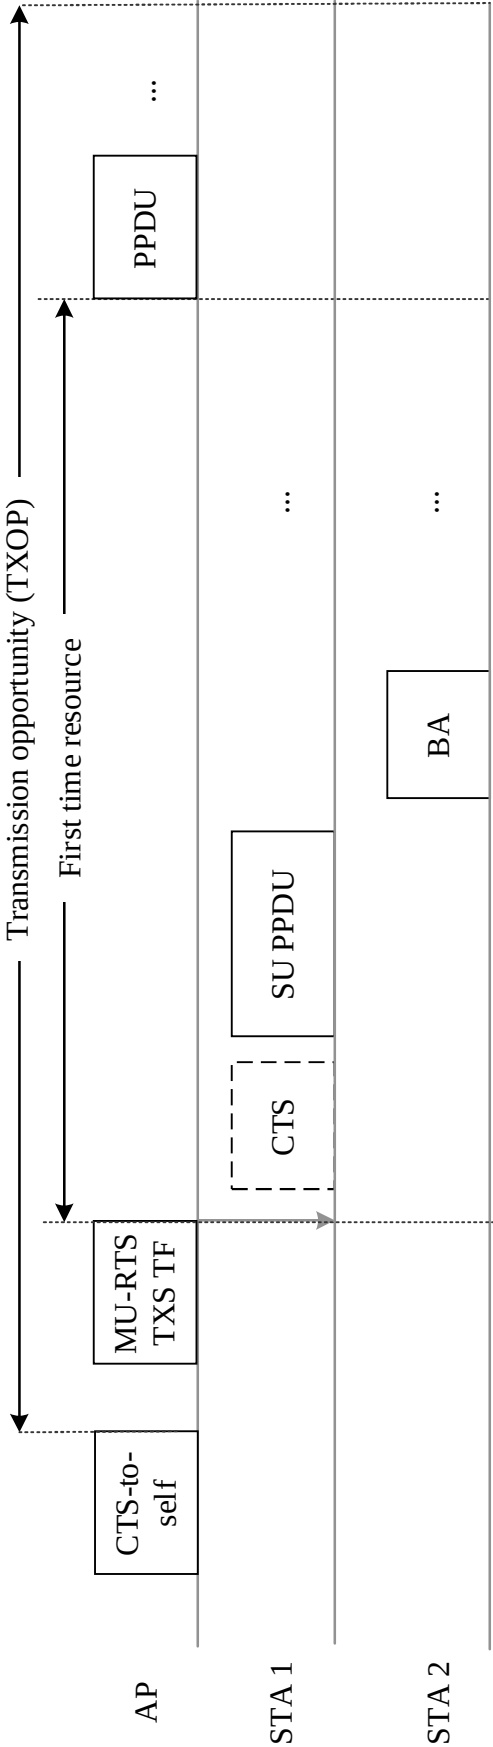


FIG. 14

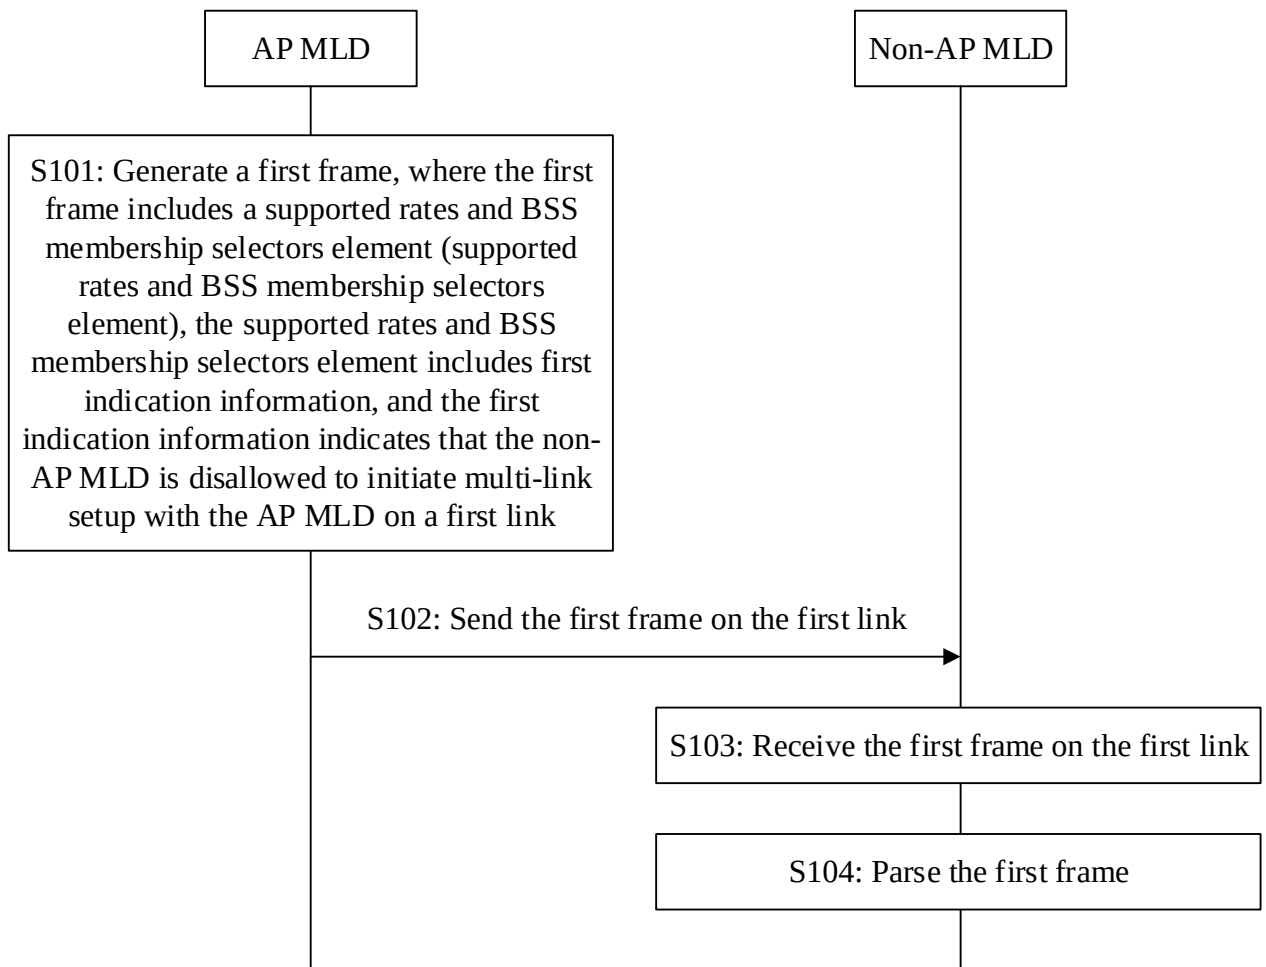


FIG. 15

	Element ID Element identifier	Length Length	Supported Rates Supported rates
Octets	1	1	1 to 8

FIG. 16

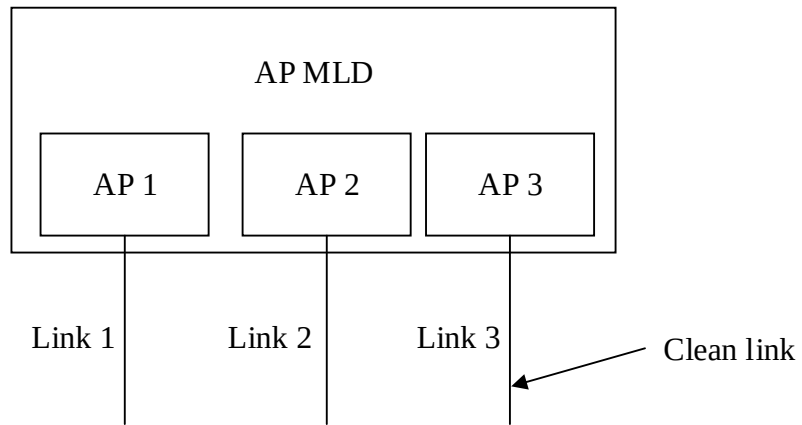


FIG. 17a

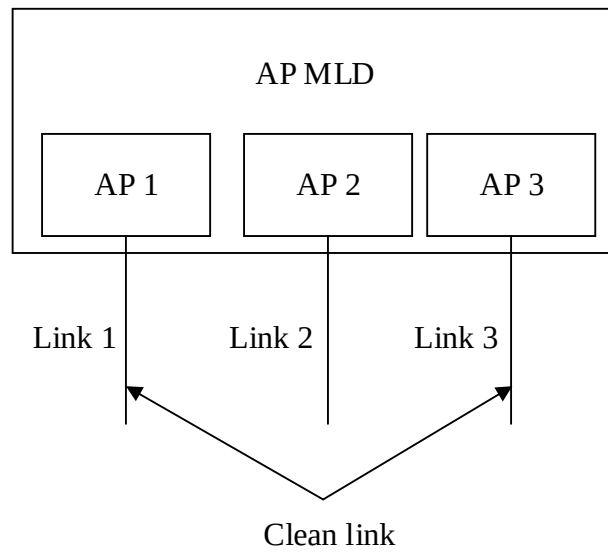


FIG. 17b

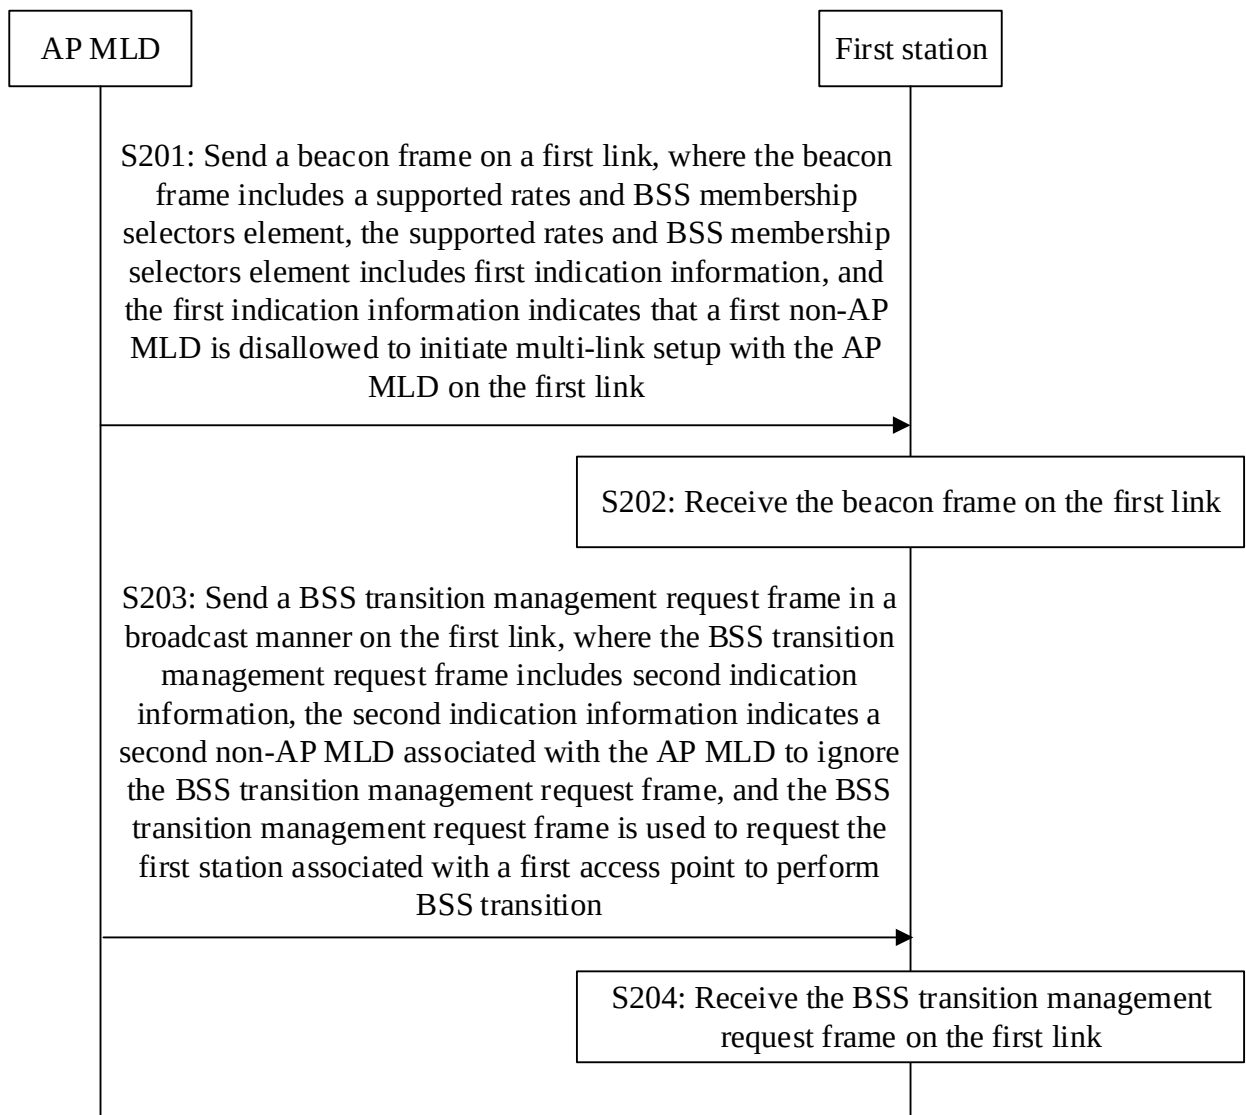


FIG. 18

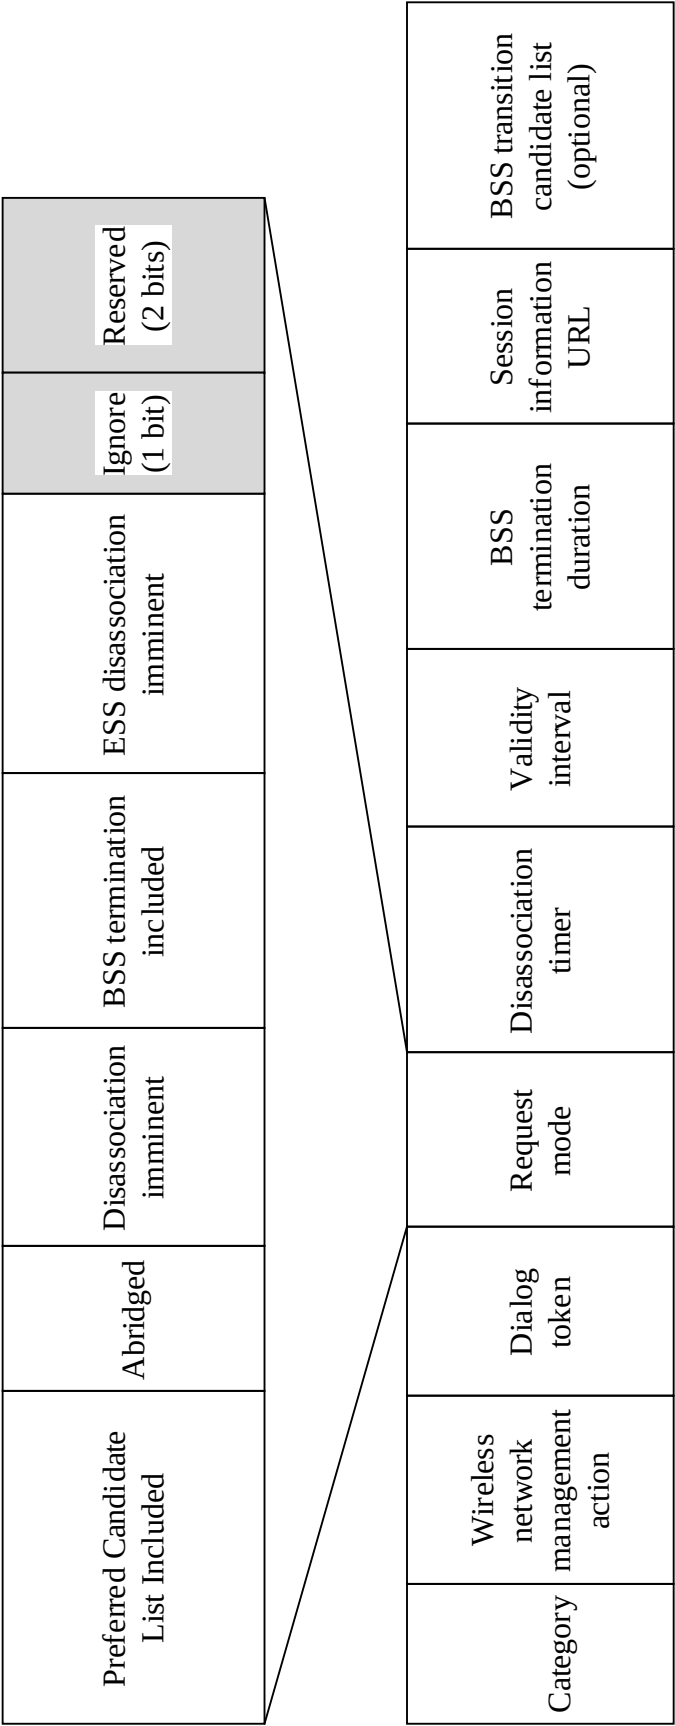


FIG. 19a

Category	Wireless network management action	Dialog token	BTM status code	BSS termination delay	Target BSSID (Optional)	BSS transition candidate list (optional)
----------	------------------------------------	--------------	-----------------	-----------------------	-------------------------	--

FIG. 19b

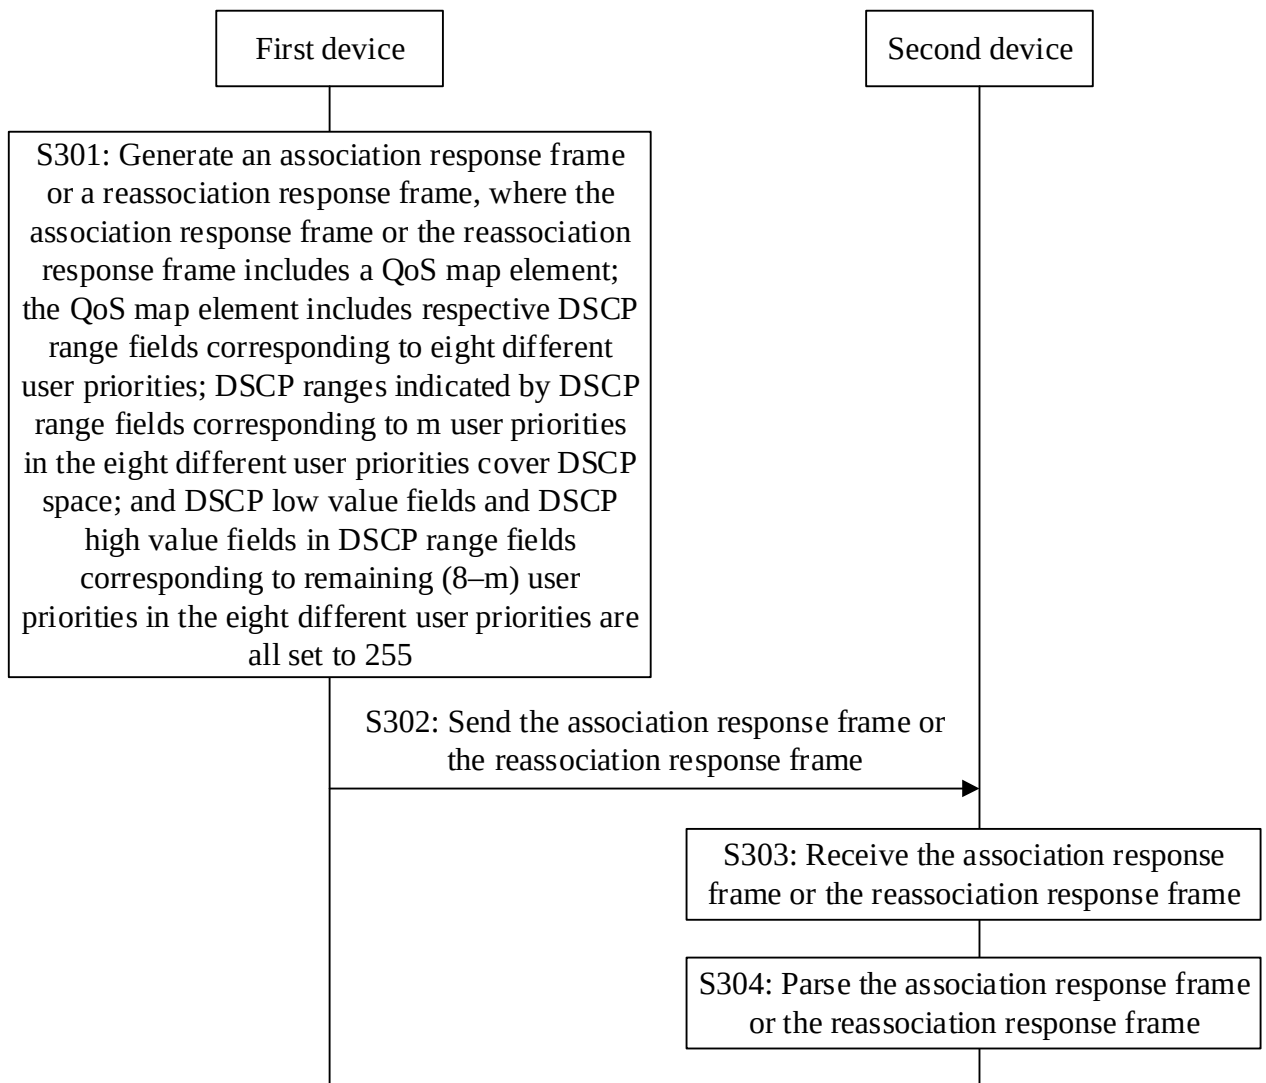


FIG. 20

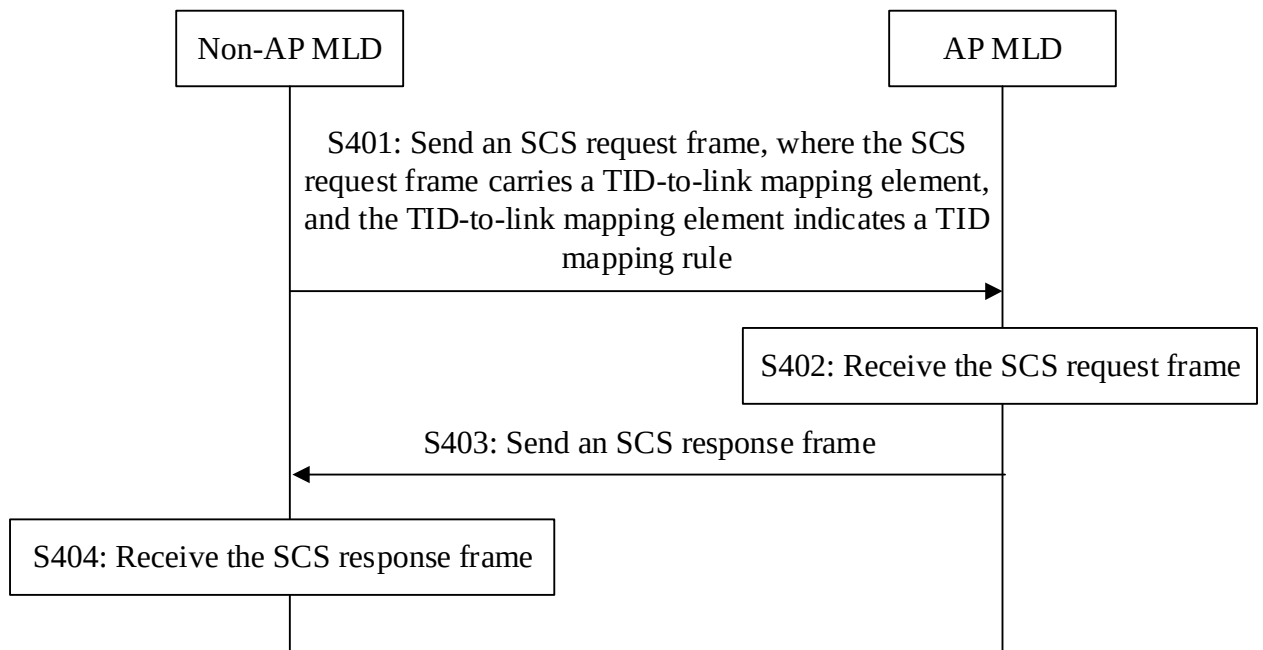


FIG. 21

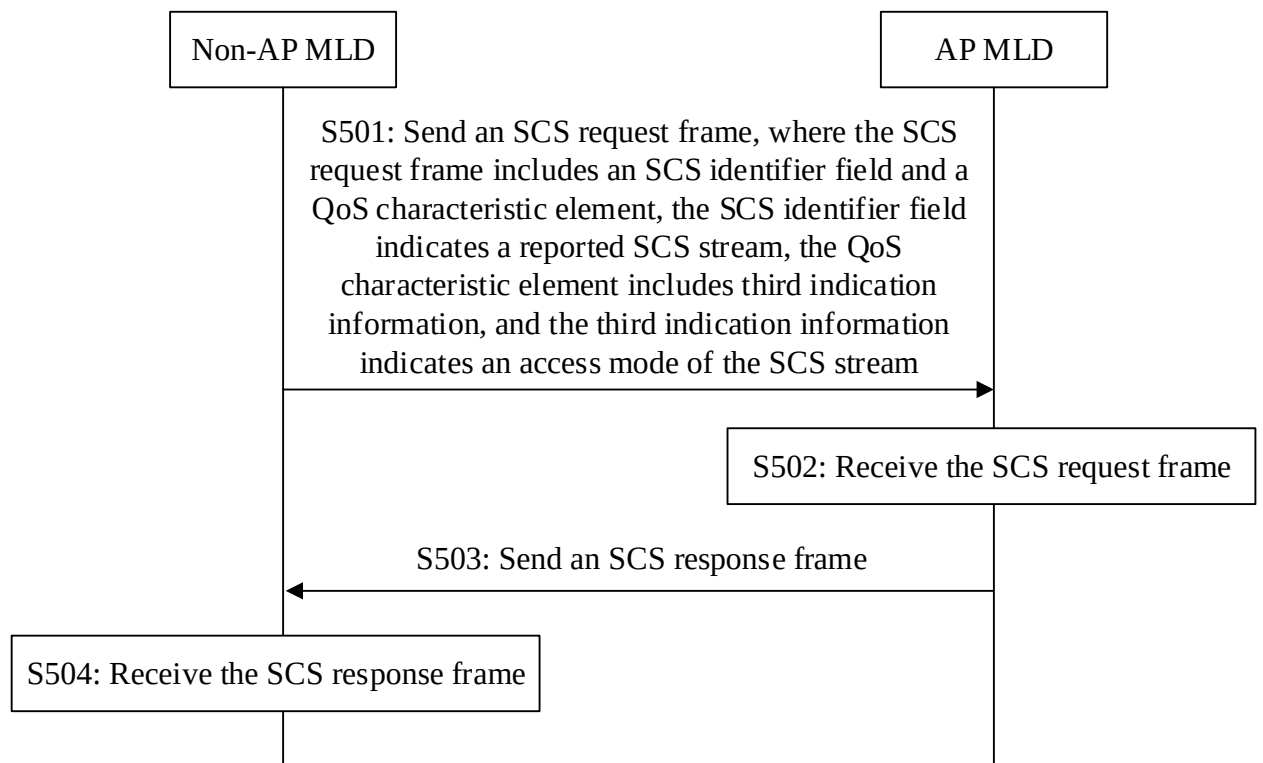


FIG. 22

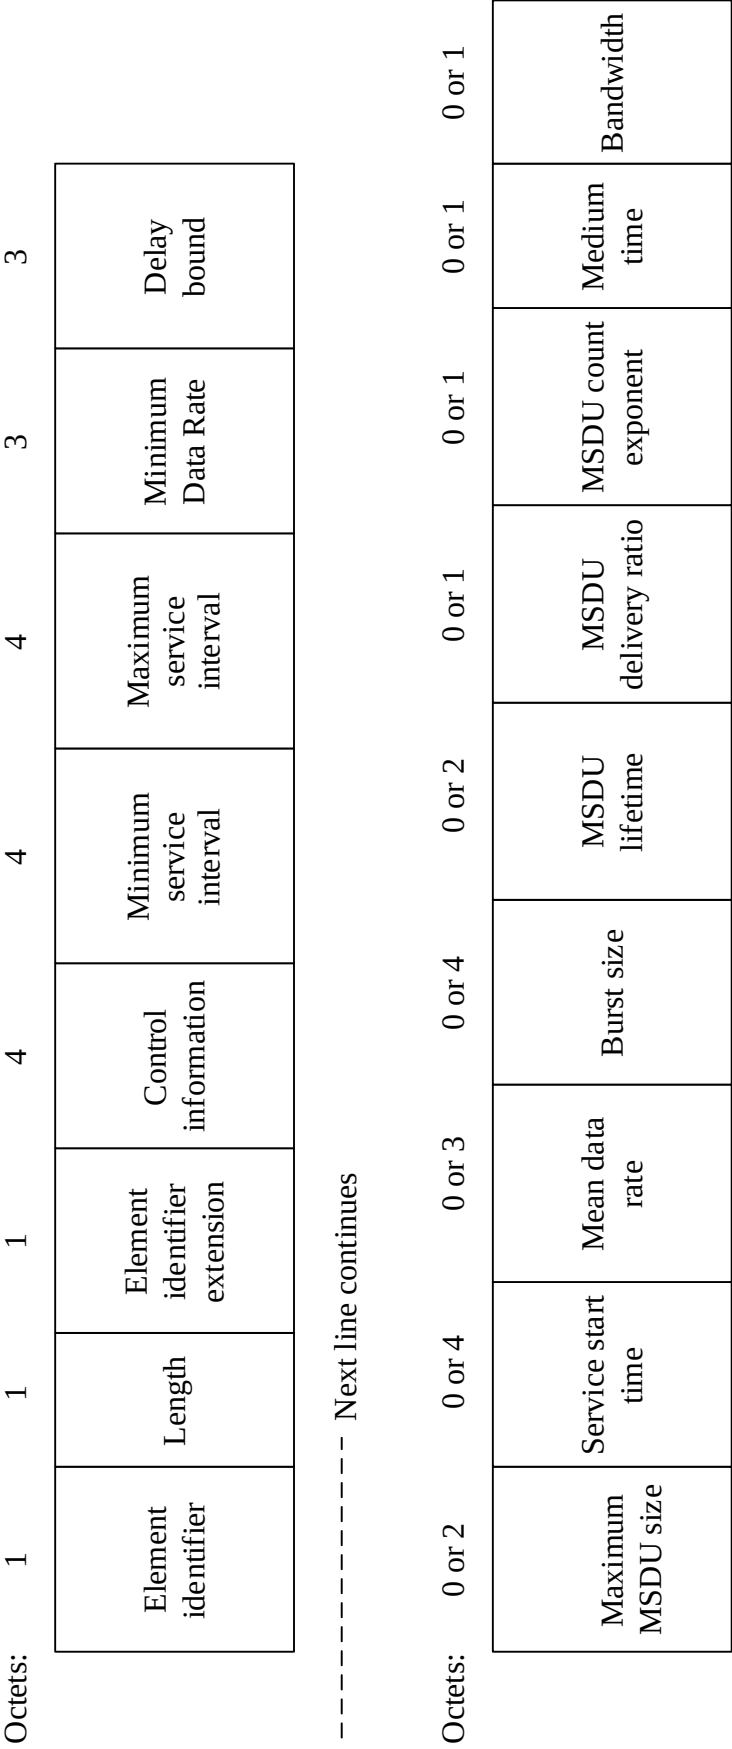


FIG. 23

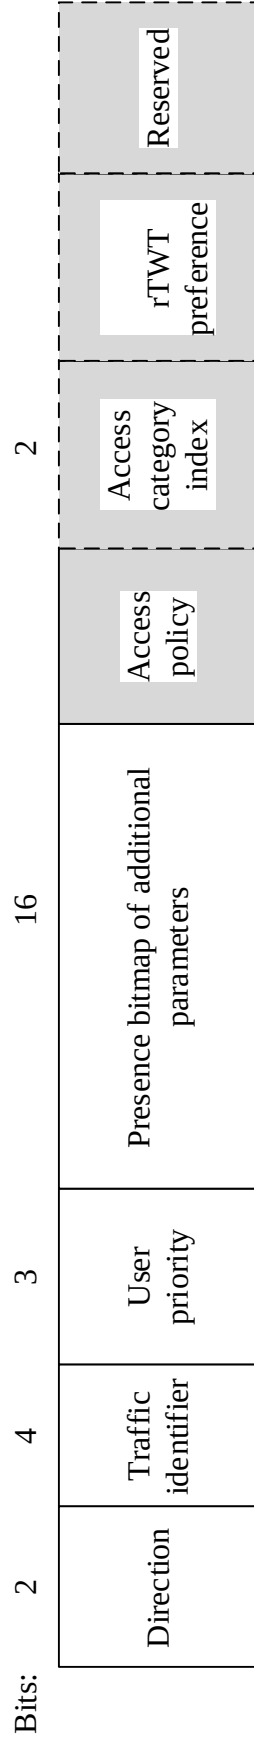


FIG. 24

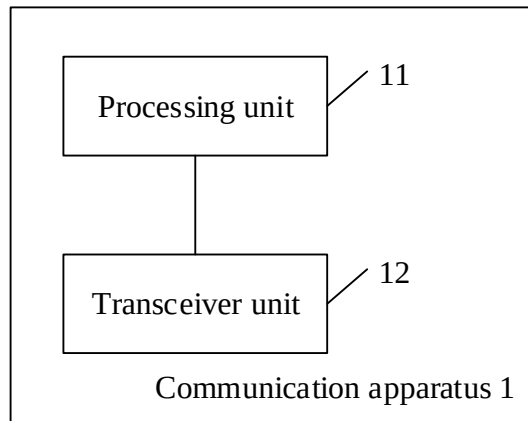


FIG. 25

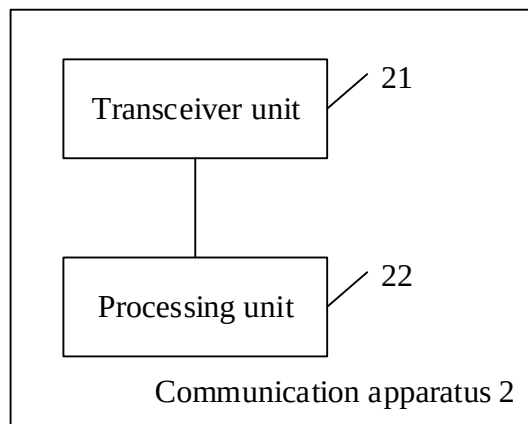


FIG. 26

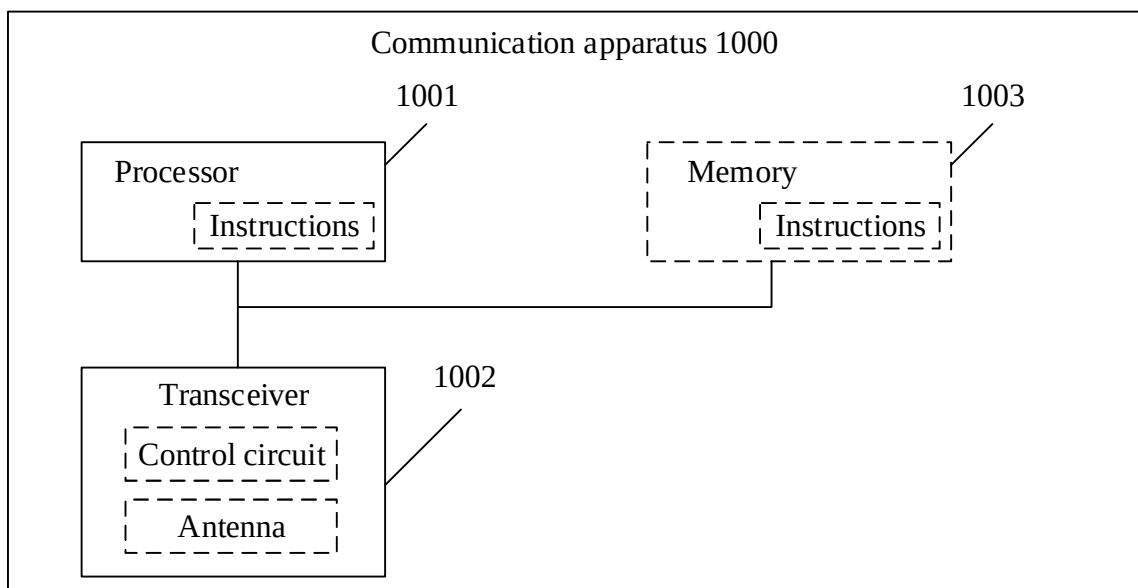


FIG. 27