

THIS SHEET HAS BEEN REPLACED

HOUSING FOR OPTICAL COMPONENTS

The present invention relates to a housing for optical components according to the preamble of claim 1.

From the not published DE 43 02 837 A1 is known in the art a housing comprising a lower housing portion and a cover for receiving optical components, such as glass fibres, couplers and splices. The housing serves for the protection of the splice and coupling positions of glass-fibre cables and for the accommodation of the necessary reserve lengths of glass fibres, in conjunction with the splice and coupling positions. The housing has a modular construction. Depending on the requirements, a different number of lower housing portions can be stacked in each other. The glass fibres connecting the lower housing portions are each introduced through the housing bottoms. The lower housing portion is provided with holders integrated in the bottom for receiving couplers and splices. During the final assembly, the lower housing portion or several lower housing portions are combined with the cover so to form a housing or a housing unit.

Disadvantageous, in this prior art housing, is the lack of flexibility when fitting the housing with components. The number of possible splices is limited by the holders integrated in the bottom. When the integrated holders are damaged, the complete lower housing portion has to be replaced.

It is therefore the object of the invention to provide a housing for optical components of the type referred to hereinbefore that can flexibly be adjusted and permits accommodation of a larger number of splices.

This Sheet Has Been Replaced



The solution of this object is achieved by the characterising features of claim 1. By the configuration of the holders for splices and couplers as separate components to be snap-fitted onto the bottom of the housing, two holders for splices and couplers or one holder for couplers and one holder for splices can be snap-fitted onto the bottom of the housing, depending on the requirements. If, e.g., no couplers are required, two holders for splices can be used. Thus the number of possible splices is doubled. When the holder for couplers is removed from the lower housing portion, a planar coupler can be mounted instead of a second holder for splices. Further, it is possible to snap-fit two holders for couplers onto the lower housing portion. The necessary splices are then obtained by recoat splicing. When a holder for splices and couplers will be damaged, the respective holder can easily be replaced, without replacing the complete lower housing portion.

Further advantageous embodiments of the invention are defined in the further subclaims. By the configuration of the holder for splices of two comb-type sections, between which a plane free area extends transversely over the full width of the holder, the number of possible splices can again be increased. The plane free area between the comb-type sections permits crossings of glass fibres without falling below their admissible bending radii. Further, e.g. for repair splices, additional detour lengths are not required.

By the depression-type configurations at the bottom sides of the holders forming closed channels together with depressions at the bottom of the housing, a single placement of switch wires in parallel to the longitudinal axis of the holder underneath thereof is made possible.

In the following, the invention will be described in more detail, with reference to an embodiment represented in the drawings of a housing for optical components. There are:

Fig. 1 a top view of the lower housing portion,
Fig. 2 a top view of the holder for splices,

This Sheet Has Been Replaced



Fig. 3 a bottom view of the holder for splices, and

Fig. 4 a partial section of the lower housing portion according to line IV-IV in Fig. 1 with not yet snap-fitted holder for splices.

The housing for optical components comprises a lower housing portion 2 and a not shown cover. The lower housing portion 2 is substantially split up into a front entry area 3 with entries and exits 5, 6 for the glass fibres integrated at the front side 4, and a holding-down device 49 above a bottom opening 9 of the lower housing portion 2, into a central area 11 with holders 51, 52 for splices or couplers, respectively, and with curved deflection elements 7, and into a rear area 14 with curved wall portions 15 for guiding the glass fibres and a holding-down device 16, which is disposed above a bottom opening 17 of the lower housing portion 2. The areas 3 and 14 are selected so that the minimum bending radii for the glass fibres are observed when introducing them into the holders 51, 52 for splices or couplers, respectively. From the wall of the narrow side 39 provided in the rear area, the holding-down device 16 above the bottom opening 17 is formed. The bottom opening 9 is formed in the entry area 3 in the same way as the bottom opening 17 of the area 14 and serves for guiding glass fibres in and out, e.g. from another lower housing portion 2.

Between the holders 51, 52 for splices and couplers are provided a pin 41, a bore 42, two elliptically shaped portions 44 and a bore 45, to the border of which a cylindrical wall having the height of the elliptically shaped portions 44 follows, said shaped portions serving for the attachment of the cover and for the attachment to a not shown subrack or for the adaptation of the housing to the installation environment, respectively. In the elliptically shaped portion 44 are provided one bore and a hexagonal depression each. Bores 46 located in the corners of the circumferential wall 47 also serve for the attachment of the cover or to the combination of several lower housing portions 2, respectively. The entry 5 is inte-

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

grated in the front side 4 or is configured as a separate component and inserted in the front side 4. Behind the entry 5 is provided a depression 48, into which a strain relief device can be inserted as a separate component. The strain relief device is preferably composed of two plates screwed to each other and having central recesses for the insertion of glass fibres. The bottom openings 9, 17 of the lower housing portion 2 are configured each as portions 60 inclined towards the centre for an optimum guidance of the glass fibres.

From the wall 47 are internally formed holding-down devices 26 serving for a safe guidance of the glass fibres. Between the wall 47 and the holders 51, 52 for splices or couplers, respectively, are each formed two further cable guiding portions 27 providing, together with the holding-down devices 26, for a safe guidance of the glass fibres in the area of the holders 51, 52 for splices or couplers, respectively.

The holders 51, 52 for splices or couplers, respectively, are configured as separate, easily exchangeable components with four latches 55 each that can be snap-fitted in recesses 59 of the bottom of the lower housing portion 2.

The holder 52 for couplers preferably comprises eight guide grooves 24 forming the receiving portions 12 for preferably eight couplers. The guide grooves 24 are interrupted by an approximately centrally arranged free area 25 extending transversely to their longitudinal direction 24, said free area serving for the application of a glue material. The couplers are safely fixed by means of an adhesion film in the guide grooves 24. The free area 24 lies slightly deeper than the deepest point of the guide grooves 24, so that by application of double-sided adhesion foils an additional coupler fixation can be achieved.

The upper side of the holder 51 for splices shown in Figs. 2 to 4 comprises two comb-type sections between which a plane free area 56 extends over the full width of the holder 51. Each comb-type section is composed of webs 53 disposed in parallel to the longitu-

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

dinal axis of the holder 51 for splices and having an equidistant spacing to each other. Between two webs 53 each is formed a groove 54 into which the glass fibre together with the splice protection is inserted. The webs 53 are V-shaped at the ends, in order to maintain the minimum bending radii when inserting the glass fibres. The bottom areas of the grooves 54 are at the same height as the plane free area 56. At the side faces are disposed two latches 55 each in the area of the comb-type sections, said latches being snap-fitted into matching recesses 59 in the bottom of the lower housing portion 2. The plane free area 56 is disposed centrally and extends approximately over one fourth to fifth of the total length of the holder 51. The grooves 54 of the two comb-type sections are aligned to each other. By the construction of the holder 51 for splices with two comb-type sections a higher packing density for the placement of the splices and a crossing of fibres without falling below the admissible bending radii are made possible. Further, there is no necessity of additional detour lengths for, e.g., repair splices, where fibre pieces are spliced in for extensions.

On the bottom side of the holder 51 for splices are provided semi-circular depressions 57, the diameter of which approximately corresponds to the diameter of the switch wires. Together with semi-circular depressions 58 formed in the bottom of the lower housing portion 2, closed channels result (Fig. 4) through which the switch wires can individually be passed underneath the holder 51 for splices. The bottom side of the holder 52 for couplers can be configured in an analogous manner to the bottom side of the holder 51 for splices.

By the configuration of the holders 51, 52 for splices or couplers, respectively, as separate components to be snap-fitted on the lower housing portion 2, a variable arrangement of the lower housing portion 2 with splices and couplers is achieved. It is possible, for instance, to configure the housing as a pure splice cassette, by snap-fitting a second holder 51

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

for splices into the lower housing portion 2, instead of the holder 52 for couplers. When using planar couplers, e.g., a holder 52 for couplers is not required. When the splices are not placed in a special splice holder, the holder 51 for splices is not required, and a second holder 52 for couplers can be used instead, thus the packing density during assembly in external housing concepts being increased, since then simple constructions with higher numbers of input and output ports are made possible. By the V-shaped configuration of the webs 53 at the ends, an introduction of the glass fibres is possible while observing the minimum bending radii. This is particularly then important, when a glass fibre has to be introduced from the one comb-type section into a groove 54 not aligned therewith of the other comb-type section.

This Sheet Has Been Replaced





PATENT CLAIMS

1. A housing for optical components, comprising a lower housing portion and at least one holder for glass fibres, couplers and splices, characterised by that the holder (51, 52) is a separate component and can be snap-fitted onto the bottom of the lower housing portion (2).

2. A housing according to claim 1, characterised by that the upper side of the holder (51) for splices is formed of two spaced, comb-type sections, between which a plane free area (56) extends over the full width of the holder (51).

3. A housing according to claim 2, characterised by that the guide grooves (54) formed by the two comb-type sections are aligned to each other.

4. A housing according to one of claims 1 to 3, characterised by that the webs (53) at the ends are V-shaped.

5. A housing according to claim 2, characterised by that the that bottom areas of the grooves (54) formed by the comb-type sections are at the same level as the plane free area (56).

6. A housing according to one of claims 1 to 3, characterised by that the lower side of the holder (51, 52) comprises depressions (57) extending in parallel to the guide grooves (24, 54), and that depressions (58) are provided on the bottom of the lower housing portion (2), said depressions forming closed channels together with the depressions (57) of the holder (51, 52).

7. A housing according to one of claims 1 to 4, characterised by that the holders (51, 52) for splices or couplers, respectively, comprise two latches (55) each to be snap-fitted in corresponding recesses (59) of the bottom of the lower housing portion.




94-015

S U M M A R Y

The present invention relates to a housing for optical components, comprising a lower housing portion and at least one holder for glass fibres, couplers and splices. It is intended to provide a housing that can flexibly be adjusted and permits accommodation of a larger number of splices.

This is achieved by that the holder (51, 52) for splices and couplers is a separate component and can be snap-fitted onto the bottom of the lower housing portion (2). (Fig. 1)

This Sheet Has Been Replaced



This Sheet Has Been Replaced





FIG. 1

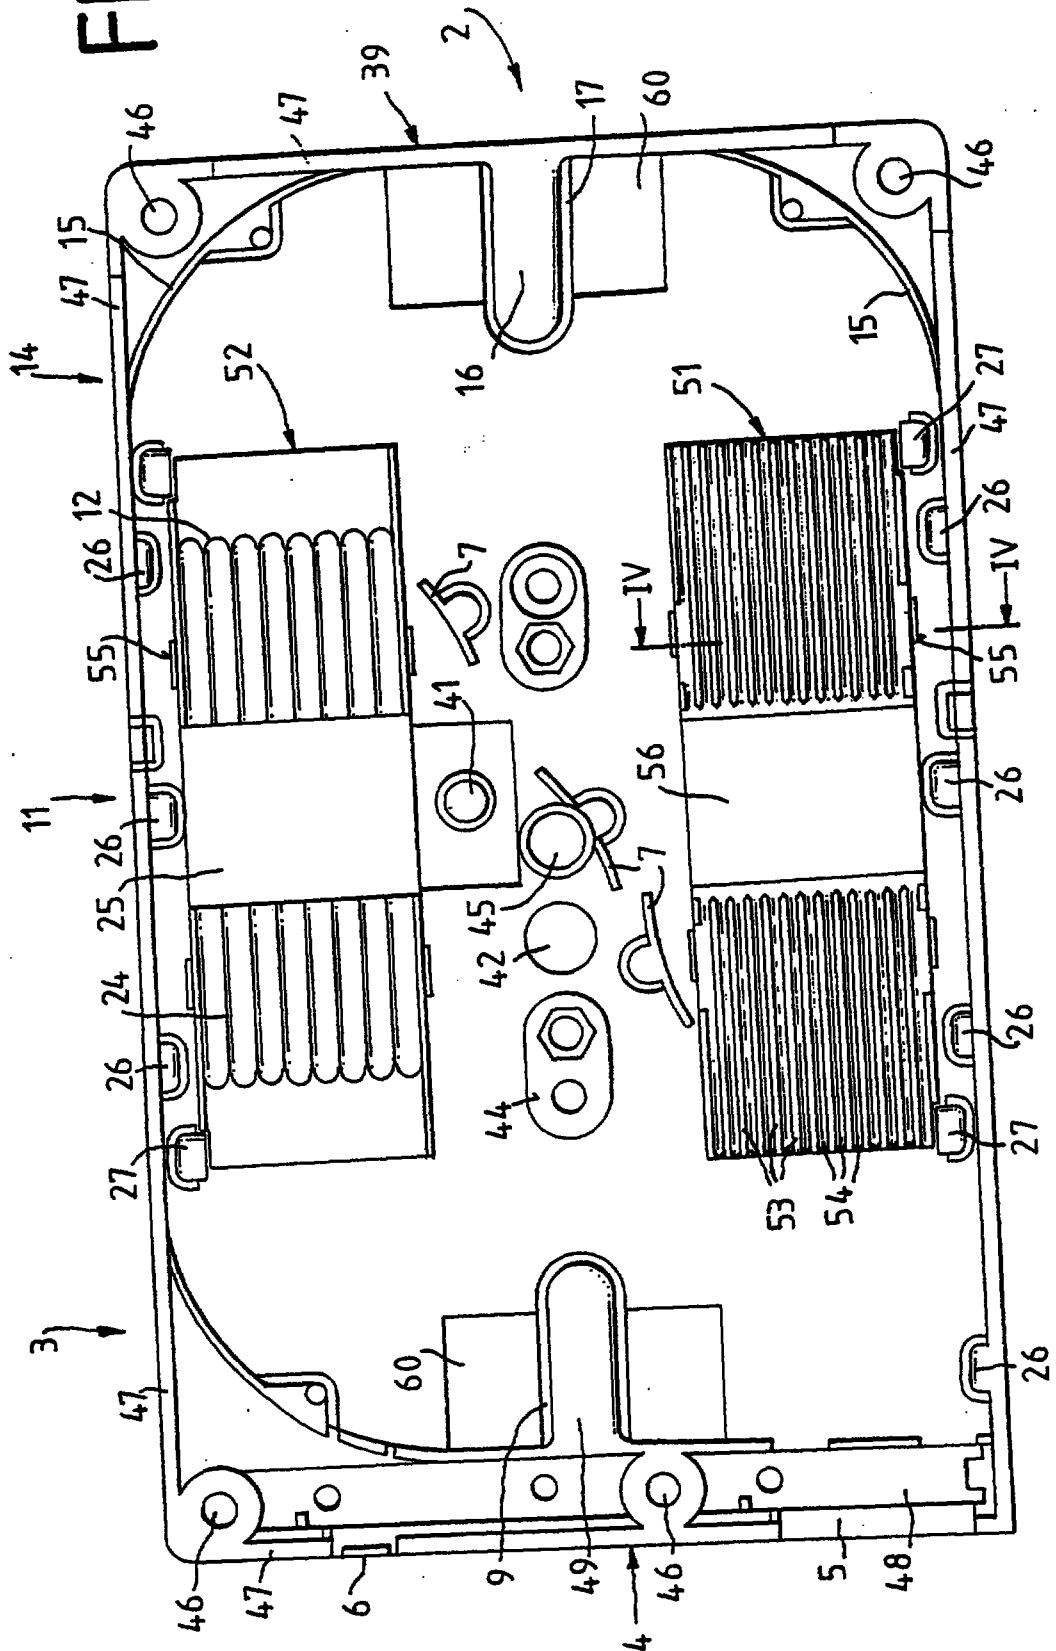

THIS SHEET HAS BEEN
REPLACED

FIG.2

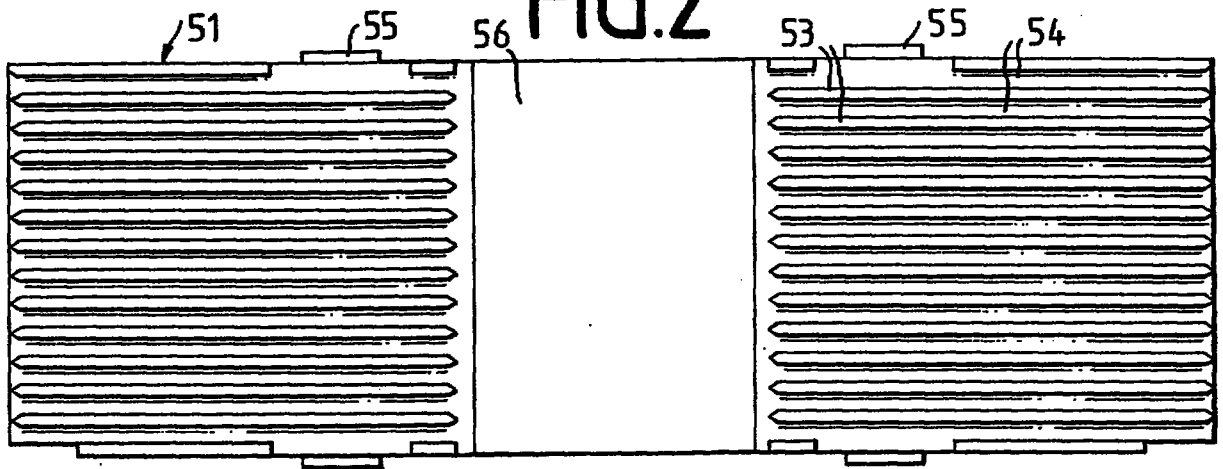


FIG.3


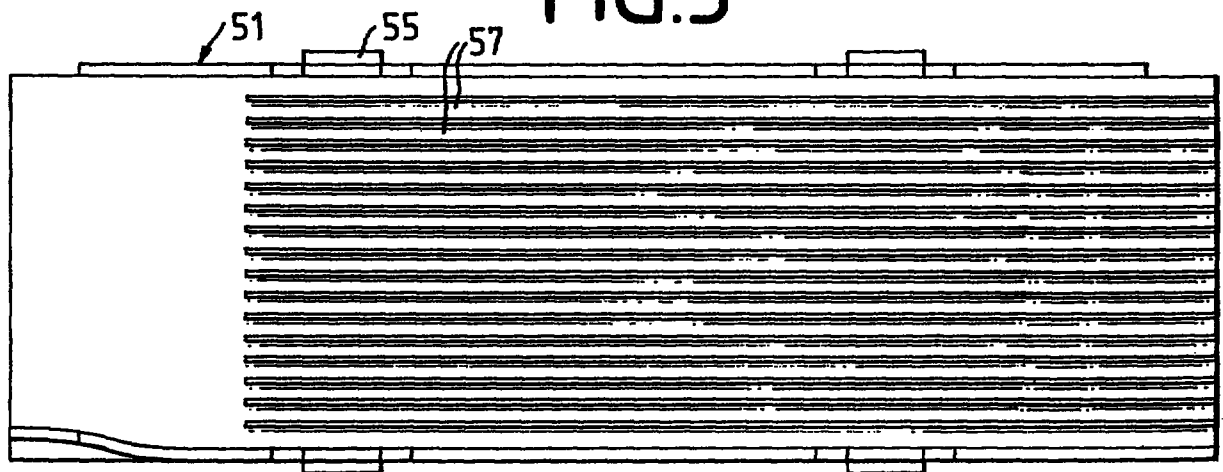



FIG.4



This Sheet Has Been Replaced

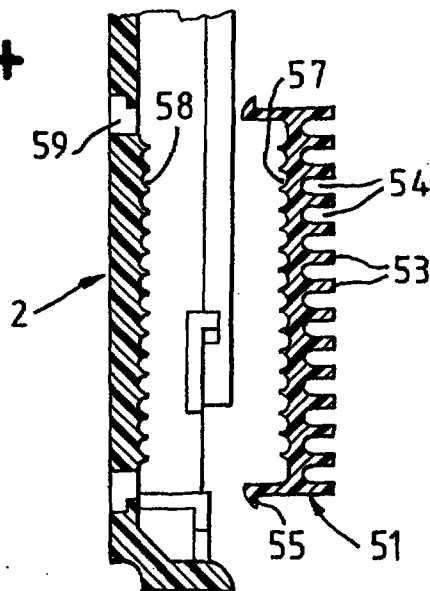

- 1 -

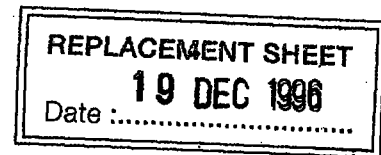

HOUSING FOR OPTICAL COMPONENTS

The present invention relates to a housing for optical components according to the preamble of claim 1.

From the not published DE 43 02 837 A1 is known in the art a housing comprising a lower housing portion and a cover for receiving optical components, such as glass fibres, couplers and splices. The housing serves for the protection of the splice and coupling positions of glass-fibre cables and for the accommodation of the necessary reserve lengths of glass fibres, in conjunction with the splice and coupling positions. The housing has a modular construction. Depending on the requirements, a different number of lower housing portions can be stacked in each other. The glass fibres connecting the lower housing portions are each introduced through the housing bottoms. The lower housing portion is provided with holders integrated in the bottom for receiving couplers and splices. During the final assembly, the lower housing portion or several lower housing portions are combined with the cover so to form a housing or a housing unit.

Disadvantageous, in this prior art housing, is the lack of flexibility when fitting the housing with components. The number of possible splices is limited by the holders integrated in the bottom. When the integrated holders are damaged, the complete lower housing portion has to be replaced.

It is therefore the object of the invention to provide a housing for optical components of the type referred to hereinbefore that can flexibly be adjusted and permits accommodation of a larger number of splices.

This Sheet Has Been Replaced



The solution of this object is achieved by the characterising features of claim 1. By the configuration of the holders for splices and couplers as separate components to be snap-fitted onto the bottom of the housing, two holders for splices and couplers or one holder for couplers and one holder for splices can be snap-fitted onto the bottom of the housing, depending on the requirements. If, e.g., no couplers are required, two holders for splices can be used. Thus the number of possible splices is doubled. When the holder for couplers is removed from the lower housing portion, a planar coupler can be mounted instead of a second holder for splices. Further, it is possible to snap-fit two holders for couplers onto the lower housing portion. The necessary splices are then obtained by recoat splicing. When a holder for splices and couplers will be damaged, the respective holder can easily be replaced, without replacing the complete lower housing portion.


Further advantageous embodiments of the invention are defined in the further subclaims. By the configuration of the holder for splices of two comb-type sections, between which a plane free area extends transversely over the full width of the holder, the number of possible splices can again be increased. The plane free area between the comb-type sections permits crossings of glass fibres without falling below their admissible bending radii. Further, e.g. for repair splices, additional detour lengths are not required.

By the depression-type configurations at the bottom sides of the holders forming closed channels together with depressions at the bottom of the housing, a single placement of switch wires in parallel to the longitudinal axis of the holder underneath thereof is made possible.

In the following, the invention will be described in more detail, with reference to an embodiment represented in the drawings of a housing for optical components. There are:

- Fig. 1 a top view of the lower housing portion,
Fig. 2 a top view of the holder for splices,

This Sheet Has Been Replaced



19 DEC 1996

Date

Fig. 3 a bottom view of the holder for splices, and


Fig. 4 a partial section of the lower housing portion according to line IV-IV in Fig. 1 with not yet snap-fitted holder for splices.

The housing for optical components comprises a lower housing portion 2 and a not shown cover. The lower housing portion 2 is substantially split up into a front entry area 3 with entries and exits 5, 6 for the glass fibres integrated at the front side 4, and a holding-down device 49 above a bottom opening 9 of the lower housing portion 2, into a central area 11 with holders 51, 52 for splices or couplers, respectively, and with curved deflection elements 7, and into a rear area 14 with curved wall portions 15 for guiding the glass fibres and a holding-down device 16, which is disposed above a bottom opening 17 of the lower housing portion 2. The areas 3 and 14 are selected so that the minimum bending radii for the glass fibres are observed when introducing them into the holders 51, 52 for splices or couplers, respectively. From the wall of the narrow side 39 provided in the rear area, the holding-down device 16 above the bottom opening 17 is formed. The bottom opening 9 is formed in the entry area 3 in the same way as the bottom opening 17 of the area 14 and serves for guiding glass fibres in and out, e.g. from another lower housing portion 2.

Between the holders 51, 52 for splices and couplers are provided a pin 41, a bore 42, two elliptically shaped portions 44 and a bore 45, to the border of which a cylindrical wall having the height of the elliptically shaped portions 44 follows, said shaped portions serving for the attachment of the cover and for the attachment to a not shown subrack or for the adaptation of the housing to the installation environment, respectively. In the elliptically shaped portion 44 are provided one bore and a hexagonal depression each. Bores 46 located in the corners of the circumferential wall 47 also serve for the attachment of the cover or to the combination of several lower housing portions 2, respectively. The entry 5 is inte-

This Sheet Has Been Replaced



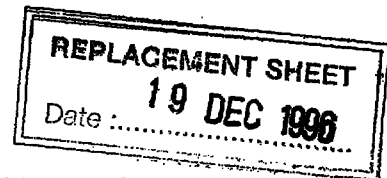

grated in the front side 4 or is configured as a separate component and inserted in the front side 4. Behind the entry 5 is provided a depression 48, into which a strain relief device can be inserted as a separate component. The strain relief device is preferably composed of two plates screwed to each other and having central recesses for the insertion of glass fibres. The bottom openings 9, 17 of the lower housing portion 2 are configured each as portions 60 inclined towards the centre for an optimum guidance of the glass fibres.

From the wall 47 are internally formed holding-down devices 26 serving for a safe guidance of the glass fibres. Between the wall 47 and the holders 51, 52 for splices or couplers, respectively, are each formed two further cable guiding portions 27 providing, together with the holding-down devices 26, for a safe guidance of the glass fibres in the area of the holders 51, 52 for splices or couplers, respectively.


The holders 51, 52 for splices or couplers, respectively, are configured as separate, easily exchangeable components with four latches 55 each that can be snap-fitted in recesses 59 of the bottom of the lower housing portion 2.

The holder 52 for couplers preferably comprises eight guide grooves 24 forming the receiving portions 12 for preferably eight couplers. The guide grooves 24 are interrupted by an approximately centrally arranged free area 25 extending transversely to their longitudinal direction 24, said free area serving for the application of a glue material. The couplers are safely fixed by means of an adhesion film in the guide grooves 24. The free area 24 lies slightly deeper than the deepest point of the guide grooves 24, so that by application of double-sided adhesion foils an additional coupler fixation can be achieved.

The upper side of the holder 51 for splices shown in Figs. 2 to 4 comprises two comb-type sections between which a plane free area 56 extends over the full width of the holder 51. Each comb-type section is composed of webs 53 disposed in parallel to the longitu-

This Sheet Has Been Replaced



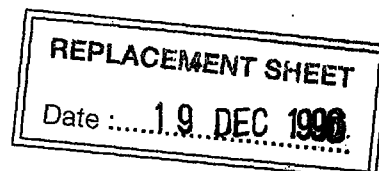

dinal axis of the holder 51 for splices and having an equidistant spacing to each other. Between two webs 53 each is formed a groove 54 into which the glass fibre together with the splice protection is inserted. The webs 53 are V-shaped at the ends, in order to maintain the minimum bending radii when inserting the glass fibres. The bottom areas of the grooves 54 are at the same height as the plane free area 56. At the side faces are disposed two latches 55 each in the area of the comb-type sections, said latches being snap-fitted into matching recesses 59 in the bottom of the lower housing portion 2. The plane free area 56 is disposed centrally and extends approximately over one fourth to fifth of the total length of the holder 51. The grooves 54 of the two comb-type sections are aligned to each other. By the construction of the holder 51 for splices with two comb-type sections a higher packing density for the placement of the splices and a crossing of fibres without falling below the admissible bending radii are made possible. Further, there is no necessity of additional detour lengths for, e.g., repair splices, where fibre pieces are spliced in for extensions.

On the bottom side of the holder 51 for splices are provided semi-circular depressions 57, the diameter of which approximately corresponds to the diameter of the switch wires. Together with semi-circular depressions 58 formed in the bottom of the lower housing portion 2, closed channels result (Fig. 4) through which the switch wires can individually be passed underneath the holder 51 for splices. The bottom side of the holder 52 for couplers can be configured in an analogous manner to the bottom side of the holder 51 for splices.

By the configuration of the holders 51, 52 for splices or couplers, respectively, as separate components to be snap-fitted on the lower housing portion 2, a variable arrangement of the lower housing portion 2 with splices and couplers is achieved. It is possible, for instance, to configure the housing as a pure splice cassette, by snap-fitting a second holder 51

This Sheet Has Been Replaced




- 6 -

REPLACEMENT SHEET

Date: 19 DEC 1996

for splices into the lower housing portion 2, instead of the holder 52 for couplers. When using planar couplers, e.g., a holder 52 for couplers is not required. When the splices are not placed in a special splice holder, the holder 51 for splices is not required, and a second holder 52 for couplers can be used instead, thus the packing density during assembly in external housing concepts being increased, since then simple constructions with higher numbers of input and output ports are made possible. By the V-shaped configuration of the webs 53 at the ends, an introduction of the glass fibres is possible while observing the minimum bending radii. This is particularly then important, when a glass fibre has to be introduced from the one comb-type section into a groove 54 not aligned therewith of the other comb-type section.

This Sheet Has Been Replaced

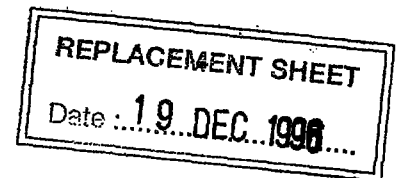


LIST OF REFERENCES

2	lower housing portion
3	entry area
4	front side
5	entries
6	exits
7	deflection element
9	bottom opening
11	central area
12	receiving portion
14	area
15	wall portion
16	holding-down device
17	bottom opening
24	guide groove
25	free area
26	holding-down device
27	cable guiding portion
39	narrow side
41	pin
42	bore
44	shaped portion
45	bore
46	bore
47	wall
48	depression
49	holding-down device
51	holder (for splices)
52	holder (for couplers)
53	web
54	guide groove
55	latch
56	free area
57	depressions (holder)
58	depressions (bottom)
59	recess
60	inclined portion

This Sheet Has Been Replaced



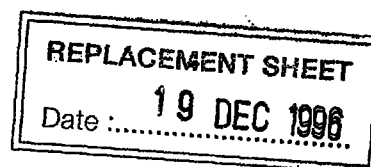

PATENT CLAIMS

1. A housing for optical components, comprising a lower housing portion and at least one holder for glass fibres, couplers and splices, characterised by that the holder (51, 52) is a separate component and can be snap-fitted onto the bottom of the lower housing portion (2).

2. A housing according to claim 1, characterised by that the upper side of the holder (51) for splices is formed of two spaced, comb-type sections, between which a plane free area (56) extends over the full width of the holder (51).

3. A housing according to claim 2, characterised by that the guide grooves (54) formed by the two comb-type sections are aligned to each other.

4. A housing according to one of claims 1 to 3, characterised by that the webs (53) at the ends are V-shaped.


5. A housing according to claim 2, characterised by that the that bottom areas of the grooves (54) formed by the comb-type sections are at the same level as the plane free area (56).

6. A housing according to one of claims 1 to 3, characterised by that the lower side of the holder (51, 52) comprises depressions (57) extending in parallel to the guide grooves (24, 54), and that depressions (58) are provided on the bottom of the lower housing portion (2), said depressions forming closed channels together with the depressions (57) of the holder (51, 52).

7. A housing according to one of claims 1 to 4, characterised by that the holders (51, 52) for splices or couplers, respectively, comprise two latches (55) each to be snap-fitted in corresponding recesses (59) of the bottom of the lower housing portion.

This Sheet Has Been Replaced



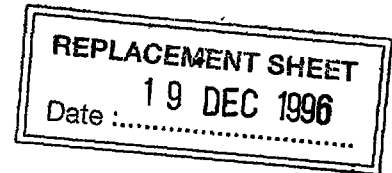

HOUSING FOR OPTICAL COMPONENTS
S U M M A R Y

The present invention relates to a housing for optical components, comprising a lower housing portion and at least one holder for glass fibres, couplers and splices. It is intended to provide a housing that can flexibly be adjusted and permits accommodation of a larger number of splices.

This is achieved by that the holder (51, 52) for splices and couplers is a separate component and can be snap-fitted onto the bottom of the lower housing portion (2). (Fig. 1)

This Sheet Has Been Replaced



This Sheet Has Been Replaced
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1




112

REPLACEMENT SHEET

19 DEC 1996

Date _____

151

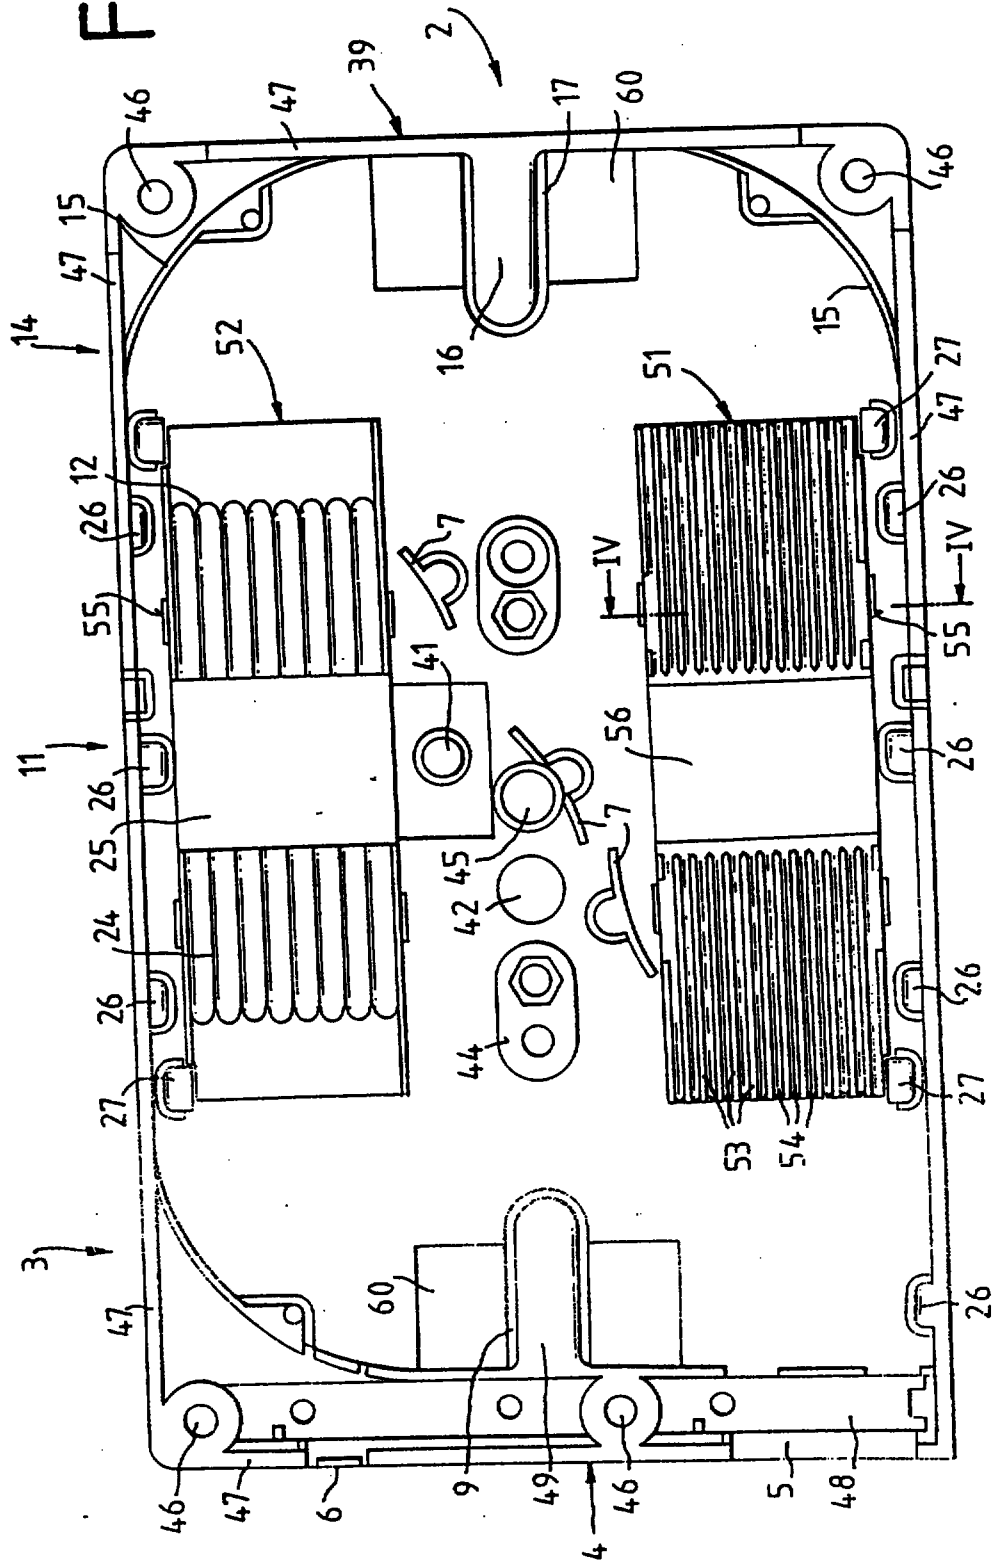

2/2

REPLACEMENT SHEET 19 DEC 1996 Date :
--



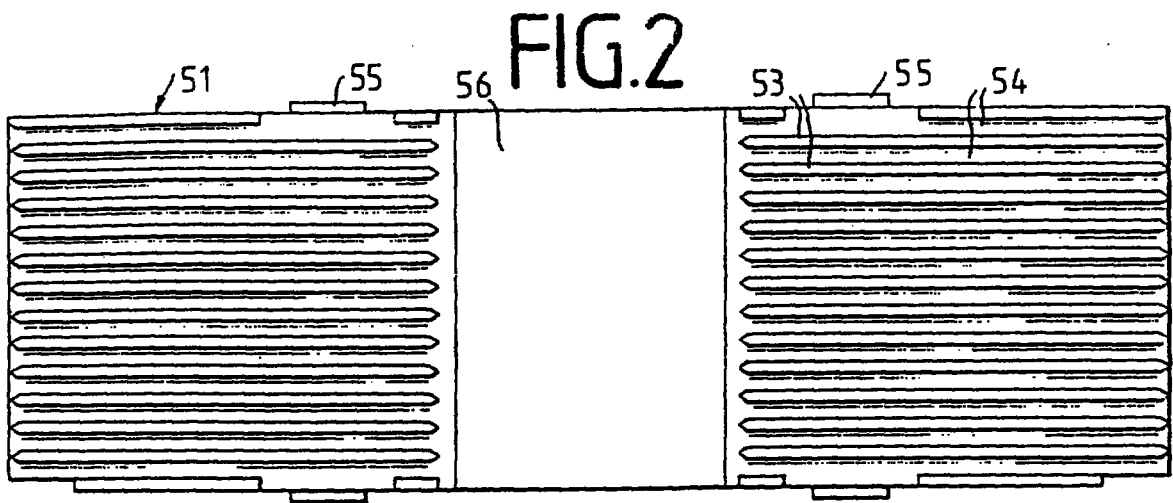


FIG.4

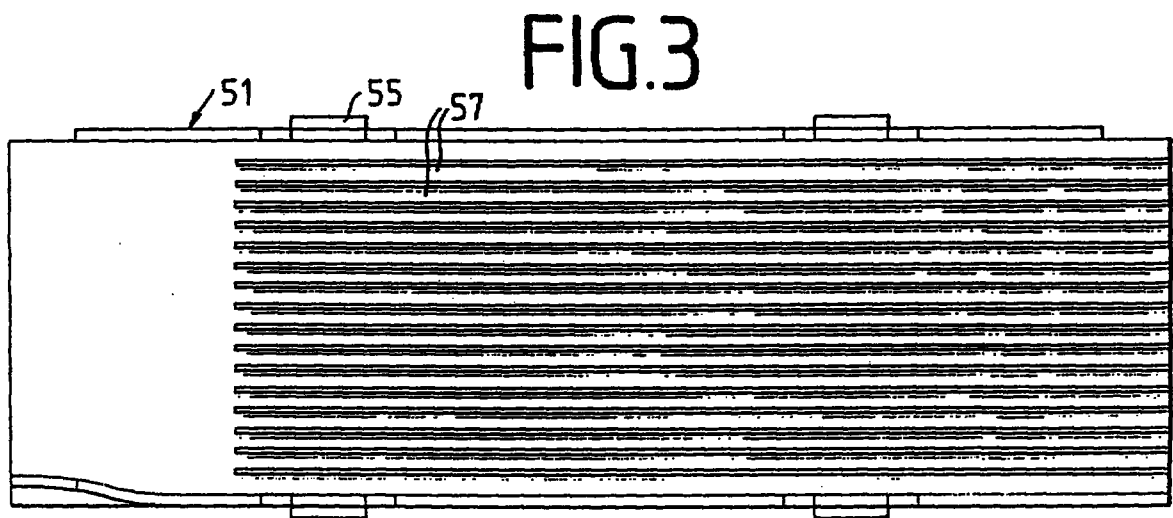

This Sheet Has Been Replaced

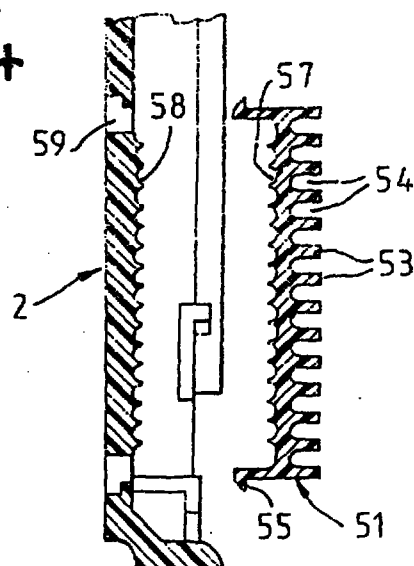

REPLACEMENT SHEET
Date :.....21 AUG 1997

THIS SHEET HAS BEEN REPLACED

- 1 -

HOUSING FOR OPTICAL COMPONENTS

FIELD OF THE INVENTION

The present invention relates to a housing for optical components including a lower housing portion and at least one holder for glass fibers, couplers and splices.

BACKGROUND OF THE INVENTION

From the not published DE 43 02 837 A1 there is known in the art a housing comprising a lower housing portion and a cover for receiving optical components, such as glass fibers, couplers and splices. The housing serves for the protection of the splice and coupling positions of glass-fiber cables and for the accommodation of the necessary reserve lengths of glass fibers, in conjunction with the splice and coupling positions. The housing has a modular construction. Depending on the requirements, a different number of lower housing portions can be stacked in each other. The glass fibers connecting the lower housing portions are each introduced through the housing bottoms. The lower housing portion is provided with holders integrated in the bottom for receiving couplers and splices. During the final assembly, the lower housing portion or several lower housing portions are combined with the cover so to form a housing or a housing unit.

Disadvantageous, in this prior art housing, is the lack of flexibility when fitting the housing with components. The number of possible splices is limited by the holders integrated in the bottom. When the integrated holders are damaged, the complete lower housing portion has to be replaced.

SUMMARY AND OBJECTS OF THE INVENTION

It is therefore the object of the invention to provide a housing for optical components of the type referred to hereinbefore that can flexibly be adjusted and which permits accommodation of a larger number of splices.

According to the invention, a housing for optical components is provided comprising a lower housing portion and at least one holder for glass fibers, couplers and splices. The holder is provided as a separate component and can be snap-fitted onto a bottom of the lower housing portion.

By the configuration of the holders for splices and couplers as separate components to be snap-fitted onto the bottom of the housing, two holders for splices and couplers or one holder for couplers and one holder for splices can be snap-fitted onto the bottom of the housing, depending on the requirements. If, e.g., no couplers are required, two holders for splices can be used. Thus the number of possible splices is doubled. When the holder for couplers is removed from the lower housing portion, a planar coupler can be mounted instead of a second holder for splices. Further, it is possible to snap-fit two holders for couplers onto the lower housing portion. The necessary splices are then obtained by recoat splicing. When a holder for splices and couplers will be damaged, the respective holder can easily be replaced, without replacing the complete lower housing portion.

The upper side of the holder for splices is preferably formed of two spaced comb-type sections between which a plane free area extends over the full width of the holder. Guide grooves formed by the two comb-type sections are aligned to each other. The webs at the ends are preferably V-shaped. The bottom areas of the grooves formed by the comb-type sections are at the same level as the plane free area. The lower side of the holder comprises depressions extending in parallel to the guide grooves and the depressions are preferably provided on the bottom of the lower housing portion. The depressions form closed channels together with the depressions of the holder. The holders for splices or couplers, respectively, comprise two latches each to be snap-fitted in corresponding recesses of the bottom of the lower housing portion.

By the configuration of the holder for splices of two comb-type sections, between which a plane free area a planar surface extends transversely over the full width of the holder, the number of possible splices can again be increased. The plane free area between the comb-type sections permits crossings of glass fibers without falling below their admissible bending radii. Further, e.g. for repair splices, additional detour lengths are not required.

By the depression-type configurations at the bottom sides of the holders forming closed channels together with depressions at the bottom of the housing, a single placement of switch wires in parallel to the longitudinal axis of the holder underneath thereof is made possible.

The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of this disclosure. For a better understanding of the invention, its operating advantages and specific objects attained by its uses, reference is made to the accompanying drawings and descriptive matter in which a preferred embodiment of the invention is illustrated.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG. 1 is a top view of the lower housing portion;

FIG. 2 is a top view of the holder for splices;

FIG. 3 is a bottom view of the holder for splices; and

FIG. 4 is a partial section of the lower housing portion according to line IV—IV in FIG. 1 with the not yet snap-fitted holder for splices.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The housing for optical components comprises a lower housing portion 2 and a not shown cover. The lower housing portion 2 is substantially split up into a front entry area 3 with entries and exits 5, 6 for the glass fibers integrated at the front side 4, and a holding-down device 49 above a bottom opening 9 of the lower housing portion 2, into a central area 11 with holders 51, 52 for splices or couplers, respectively, and with curved deflection elements 7, and into a rear area 14 with curved wall portions 15 for guiding the glass fibers and a holding-down device 16, which is disposed above a bottom opening 17 of the lower housing portion 2. The areas 3 and 14 are selected so that the minimum bending radii for the glass fibers are observed when introducing them into the holders 51, 52 for splices or couplers, respectively. From the wall of the narrow side 39 provided in the rear area, the holding-down device 16 above the bottom opening 17 is formed. The bottom opening 9 is formed in the entry area 3 in the same way as the bottom opening 17 of the area 14 and serves for guiding glass fibers in and out, e.g. from another lower housing portion 2.

Between the holders 51, 52 for splices and couplers are provided a pin 41, a bore 42, two elliptically shaped portions 44 and a bore 45, to the border of which a cylindrical wall

having the height of the elliptically shaped portions 44 follows. The shaped portions serve for the attachment of the cover and for the attachment to a not shown subrack or for the adaptation of the housing to the installation environment, respectively. In the elliptically shaped portions 44 there are provided one bore and a hexagonal depression each. Bores 46 located in the corners of the circumferential wall 47 also serve for the attachment of the cover or to the combination of several lower housing portions 2, respectively. The entry 5 is integrated in the front side 4 or is configured as a separate component and inserted in the front side 4. Behind the entry 5 is provided a depression 48, into which a strain relief device can be inserted as a separate component. The strain relief device is preferably composed of two plates screwed to each other and having central recesses for the insertion of glass fibers. The bottom openings 9, 17 of the lower housing portion 2 are each configured portions 60 inclined towards the center for an optimum guidance of the glass fibers.

From the wall 47 there are internally formed holding-down devices 26 serving for a safe guidance of the glass fibers. Between the wall 47 and the holders 51, 52 for splices or couplers, respectively, are each formed two further cable guiding portions 27 providing, together with the holding-down devices 26, for a safe guidance of the glass fibers in the area of the holders 51, 52 for splices or couplers, respectively.

The holders 51, 52 for splices or couplers, respectively, are configured as separate, easily exchangeable components with four latches 55 each that can be snap-fitted in recesses 59 of the bottom of the lower housing portion 2.

The holder 52 for couplers preferably comprises eight guide grooves 24 forming the receiving portions 12 for preferably eight couplers. The guide grooves 24 are interrupted by an approximately centrally arranged free area or planar surface region 25 extending transversely to their longitudinal direction 24. The free area serves for the application of a glue material. The couplers are safely fixed by means of an adhesion film in the guide grooves 24 or planar surface region 25. The free area 24 lies slightly deeper than the deepest point of the guide grooves 24, so that by application of double-sided adhesion foils an additional coupler fixation can be achieved.

The upper side of the holder 51 for splices shown in FIGS. 2 to 4 comprises two comb-type sections between which a plane free area or planar surface 56 extends over the full width of the holder 51. Each comb-type section is composed of webs 53 disposed in parallel to the longitudinal axis of the holder 51 for splices and having an equidistant spacing to each other. Between each two webs 53 there is formed a groove 54 into which the glass fiber together with the splice protection is inserted. The webs 53 are V-shaped at the ends, in order to maintain the minimum bending radii when inserting the glass fibers. The bottom areas of the grooves 54 are at the same height as the plane free area 56. At the side faces there are disposed two latches 55 each in the area of the comb-type sections, said latches being snap-fitted into matching recesses 59 in the bottom of the lower housing portion 2. The plane free area or planar surface 56 is disposed centrally and extends approximately over one fourth to fifth of the total length of the holder 51. The grooves 54 of the two comb-type sections are aligned to each other. By the construction of the holder 51 for splices with two comb-type sections a higher packing density for the placement of the splices and a crossing of fibers without falling below the admissible bending radii are made possible. Further, there is no necessity of additional detour lengths for, e.g., repair splices, where fiber pieces are spliced in for extensions.

On the bottom side of the holder 51 for splices there are provided semi-circular depressions 57, the diameter of which approximately corresponds to the diameter of the switch wires. Together with semi-circular depressions 58 formed in the bottom of the lower housing portion 2, closed channels result (FIG. 4) through which the switch wires can individually be passed underneath the holder 51 for splices. The bottom side of the holder 52 for couplers can be configured in an analogous manner to the bottom side of the holder 51 for splices.

By the configuration of the holders 51, 52 for splices or couplers, respectively, as separate components to be snap-fitted on the lower housing portion 2, a variable arrangement of the lower housing portion 2 with splices and couplers is achieved. It is possible, for instance, to configure the housing as a pure splice cassette, by snap fitting a second holder 51 for splices into the lower housing portion 2, instead of the holder 52 for couplers. When using planar couplers, e.g., a holder 52 for couplers is not required. When the splices are not placed in a special splice holder, the holder 51 for splices

21 AUG 1997

Date :

- 6 -

is not required, and a second holder 52 for couplers can be used instead, thus the packing density during assembly in external housing concepts being increased, since then simple constructions with higher numbers of input and output ports are made possible. By the V-shaped configuration of the webs 53 at the ends, an introduction of the glass fibers is possible while observing the minimum bending radii. This is then particularly important, when a glass fiber has to be introduced from the one comb-type section into a groove 54 not aligned therewith of the other comb-type section.

While a specific embodiment of the invention has been shown and described in detail to illustrate the application of the principles of the invention, it will be understood that the invention may be embodied otherwise without departing from such principles.



What is claimed is:

1. A housing for optical components, comprising a lower housing portion; at least one holder for holding glass fibers, couplers or splices; said holder being provided as a component separate from said lower housing portion; and snap fit means provided on said lower housing portion and said holder, said snap fit means for snap fit of said holder into a bottom of said lower housing portion; said holder having a lower side comprising depressions, an upper side of said holder including a comb-type section defining guide grooves, said depressions extending in parallel to said guide grooves, said lower housing portion including depressions whereby said depressions of said lower housing portion cooperate with depressions of said holder to form channels between said lower housing portion and said holder.
2. A housing according to claim 1, wherein said holder is a splice holder including said upper side, said holder further comprising a second comb-type section with a planar surface formed between said comb-type sections, said planar surface extending over a full width of said holder.
3. A housing according to claim 2, wherein said guide grooves include two sets of guide grooves formed by said two comb-type sections, said guide grooves being aligned to each other.
4. A housing according to claim 1, wherein said comb-type section of said holder includes webs defining guide grooves, said webs having v-shaped ends.
5. A housing according to claim 2, wherein a bottom area of grooves formed by said comb-type sections are at a same level as said planar surface.
6. A housing according to claim 1, wherein said snap fit means includes latches provided on said holder and recesses provided on a bottom of said lower housing portion, said latches each being snap fittable into corresponding said recesses of said lower housing portion.
7. A housing for optical components, comprising:
a lower housing portion;
at least one holder for holding glass fibers, couplers or splices, said holder being provided as a component separate from said lower housing portion, said holder having a lower side comprising depressions and an upper side defining guide grooves, said depressions extending in parallel to said guide grooves, said lower housing portion including depressions formed on a surface thereof and opposite said depressions in said holder, said depressions of said lower housing portion cooperating with said depressions of said holder to form channels between said lower housing portion and said holder, said guide grooves being formed by two spaced, comb-type sections with a planar surface region between said comb-type sections, said planar surface region extending over a full width of said holder.
8. A housing for optical components according to claim 7, wherein:
said lower housing portion extends farther than said holder in a direction substantially parallel to said holder.



9. A housing for optical components according to claim 7, further comprising:

another holder for holding glass fibers, couplers or splices, said another holder being provided as a component separate from said lower housing portion, said another holder having a lower side comprising depressions and an upper side defining guide grooves, said depressions extending in parallel to said guide grooves, said lower housing portion including other depressions formed on a surface thereof, said other depressions of said lower housing portion cooperating with said depressions of said another holder to form channels between said lower housing portion and said another holder.

10. A housing for optical components according to claim 7, wherein:

said lower housing includes a holding down device spaced from said depressions formed on said surface of said lower housing.

11. A housing for optical components according to claim 7, wherein:

said lower housing includes a strain relief device spaced from said depressions formed on said surface of said lower housing.

12. A housing for optical components according to claim 7, wherein:

said depressions are a different size than said guide grooves.

13. A housing for optical components according to claim 7, wherein:

said depressions have a diameter substantially equal to a diameter of a switch wire.

14. A housing for optical components according to claim 7, wherein:

said channels have a dimension through which switch wires can be passed.

15. A housing for optical components, comprising a lower housing portion; at least one holder for holding glass fibers, couplers or splices; said holder being provided as a component separate from said lower housing portion; and snap fit means provided on said lower housing portion and said holder, said snap fit means for snap fit of said holder into a bottom of said lower housing portion; said holder having a lower side comprising depressions, an upper side of said holder including a comb-type section defining guide grooves, said depressions extending in parallel to said guide grooves, said lower housing portion including depressions whereby said depressions of said lower housing portion cooperate with depressions of said holder to form channels; said snap fit means includes latches provided on said holder and recesses provided on a bottom of said lower housing portion, said latches each being snap fittable into corresponding said recesses of said lower housing portion.



- 8a -

REPLACEMENT SHEET
Date : 21 AUG 1997

16. A housing for optical components, comprising:

a lower housing portion;

at least one holder for holding glass fibers, couplers or splices, said holder being provided as a component separate from said lower housing portion, said holder having a lower side comprising depressions and an upper side defining guide grooves, said depressions extending in parallel to said guide grooves, said lower housing portion including depressions formed on a surface thereof and opposite said depressions in said holder, said depressions of said lower housing portion cooperating with said depressions of said holder to form channels between said lower housing portion and said holder, said guide grooves are formed by two spaced, comb-type sections with a planar surface region between said comb-type sections, said planar surface region extending over a full width of said holder, said depressions being a different size than said guide grooves.

REPLACEMENT SHEET

Date : 21 AUG 1997

ABSTRACT

HOUSING FOR OPTICAL COMPONENTS

THIS SHEET HAS BEEN
REPLACED

A housing for optical components includes a lower housing portion and at least one holder for glass fibers, couplers and splices. It is intended to provide a housing that can flexibly be adjusted and permits accommodation of a larger number of splices. This is achieved by that the holder for splices and couplers is a separate component and can be snap-fitted onto the bottom of the lower housing portion.

This Sheet Has Been Replaced




FIG.1

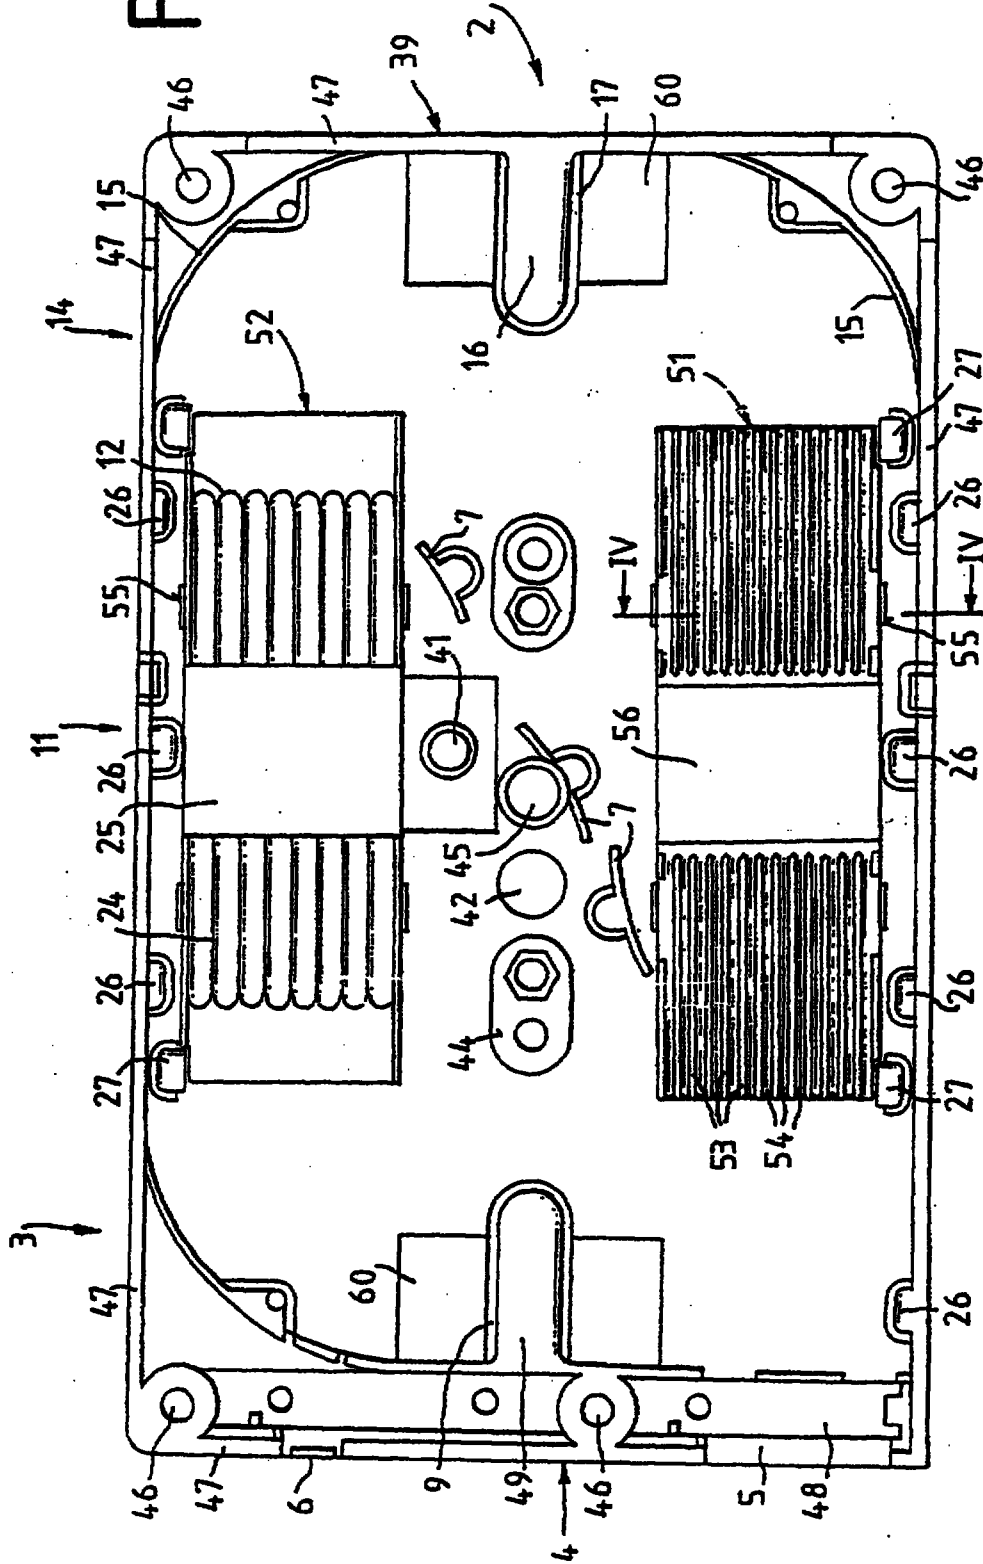


FIG.2

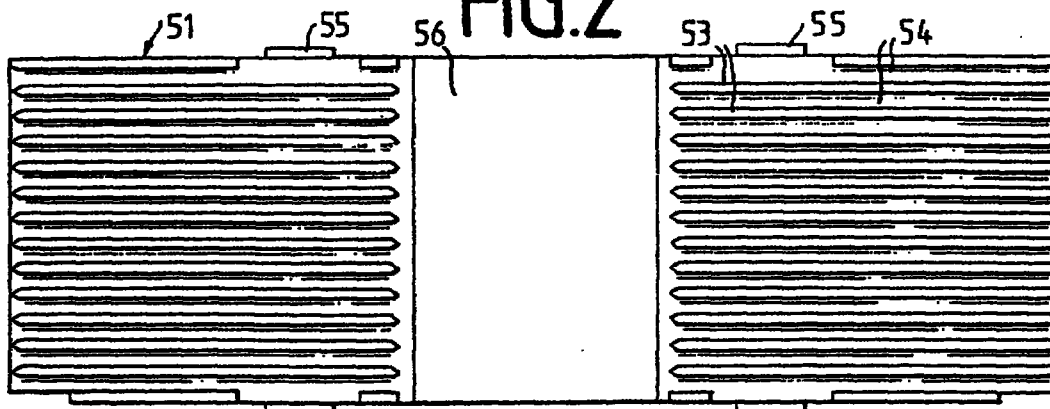


FIG.3



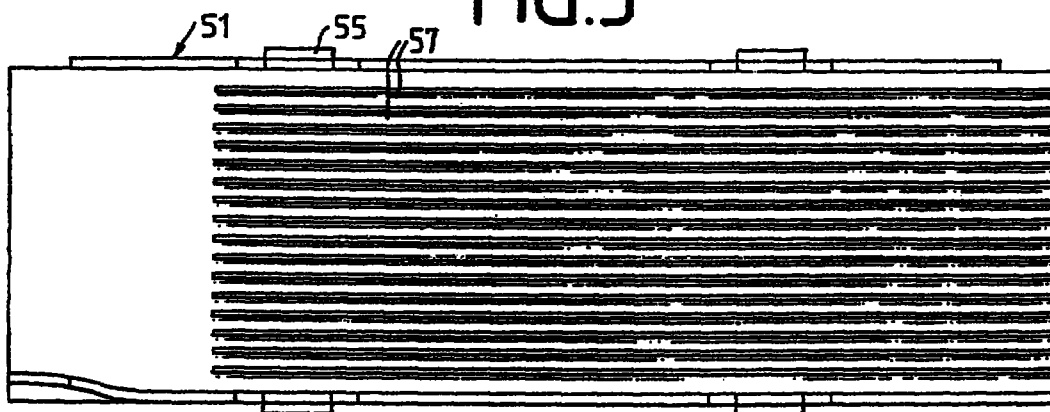


FIG.4

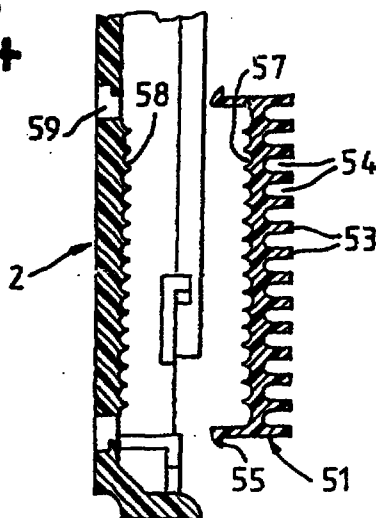

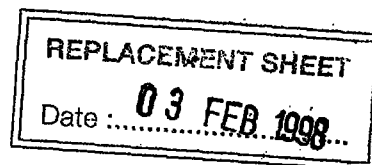

ABSTRACT

HOUSING FOR OPTICAL COMPONENTS

A housing for optical components includes a lower housing portion and at least one holder for glass fibers, couplers and splices. It is intended to provide a housing that can flexibly be adjusted and permits accommodation of a larger number of splices. This is achieved by that the holder for splices and couplers is a separate component and can be snap-fitted onto the bottom of the lower housing portion.

Figure 1