



(51) International Patent Classification:
F16L 23/16 (2006.01) *G01M 3/28* (2006.01)
E21B 33/043 (2006.01)

(21) International Application Number:
PCT/IB2011/002170

(22) International Filing Date:
19 September 2011 (19.09.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20101320 22 September 2010 (22.09.2010) NO

(71) Applicant (for all designated States except US): **VETCO GRAY SCANDINAVIA AS** [NO/NO]; P.O. Box 423, N-1302 Sandvika (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GJERSTAD, Ole** [NO/NO]; Sankt Halvards gate 5, N-3015 DRAMMEN (NO). **WIKTORSSON, Bo, Anders** [SE/NO]; Emilie Haugs vei 7, N-1350 LOMMEDALEN (NO). **JOHANSSON, Kristina, Ulrika** [SE/NO]; Erling Skjalgssons gate 19A, N-0267 OSLO (NO).


(74) Common Representative: **VETCO GRAY SCANDINAVIA AS**; c/o Henrik Fransson AB, Forskargränd 8, B194, S-72226 Västerås (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: TUBULAR JOINT

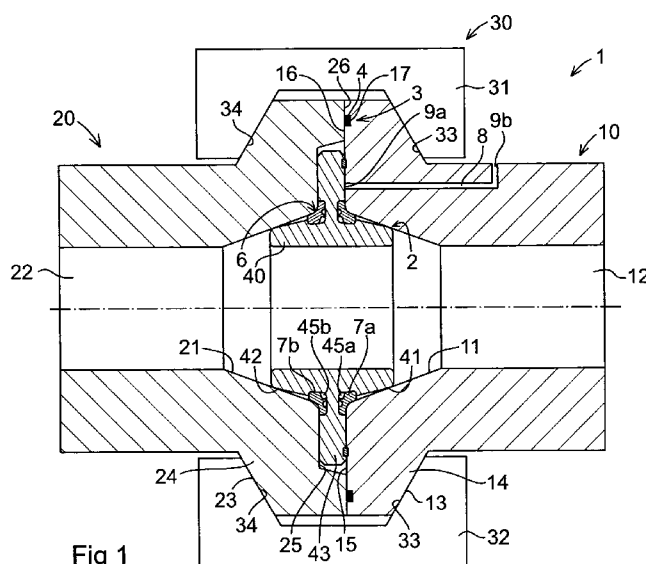

(57) Abstract: A tubular joint comprising: first and second tubular members (10, 20); a metallic seal ring (40) positioned between the tubular members and having sealing surfaces (41, 42) designed to mate with corresponding sealing surfaces of the tubular members to form a primary seal (2); an additional seal (3) provided between the tubular members radially outwardly of the primary seal; a fluid channel (8) having an outlet opening (9a) in an end surface of the first tubular member radially outwardly of said primary seal and radially inwardly of said additional seal; and annular seal members (7a, 7b) interposed between the seal ring and the tubular members radially outwardly of the primary seal and radially inwardly of said outlet opening and designed to allow fluid flow past the seal members in a radial direction inwards and to prevent fluid flow past the seal members in a radial direction outwards.



Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))