



(51) International Patent Classification:

F21S 2/00 (2006.01) F21V 21/00 (2006.01)
F21V 5/04 (2006.01)

(21) International Application Number:

PCT/US2014/052646

(22) International Filing Date:

26 August 2014 (26.08.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/869,989 26 August 2013 (26.08.2013) US

(71) Applicant: DELTA T CORPORATION [US/US]; 2348
Innovation Drive, Lexington, KY 40511 (US).

(72) Inventor: GREINKE, Tom; c/o Delta T Corporation,
2348 Innovation Drive, Lexington, KY 40511 (US).

(74) Agent: DORISIO, Andrew, D.; King & Schickli, PLLC,
247 North Broadway, Lexington, KY 40507 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))

(54) Title: TUNABLE LUMINAIRE AND RELATED METHODS TO CONTROL LIGHT OUTPUT

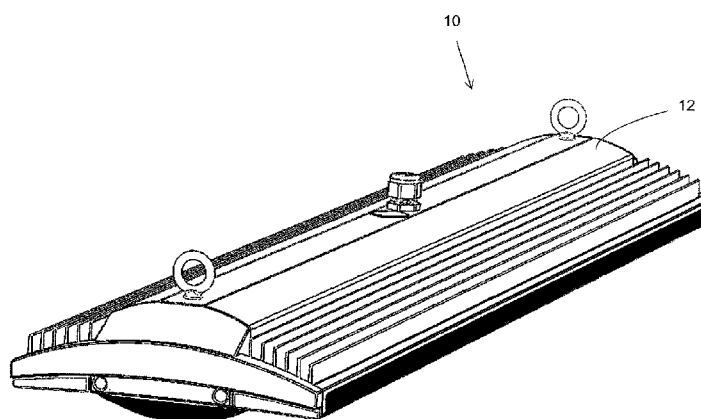


Fig. 1

(57) Abstract: A light fixture may include one or more light sources and one or more lenses for manipulating light provided by the light sources. The lenses may manipulate the direction of the light, light wavelength, dispersion pattern, or any other quality of the light. The lenses may be slidably removable from the light fixture to provide for easy exchange of one lens for another. This exchange of one lens for another may provide for rapid and easy changes to the light dispersion from the light fixture without requiring manipulation of the light sources themselves, especially in the case of exchanging a first lens with a first quality for a second lens with a second, different quality. In addition, a method of servicing the light fixture may include the provision of alternate lenses based on predetermined factors such as time, light degradation, environment of use, and the occurrence of specified events.

