

COMPOSITION FOR STRUCTURAL ADHESIVE

The present invention relates to the field of acrylic structural adhesives (based on acrylate or on methacrylate) and to the uses thereof.

Structural adhesives are a good alternative to other mechanical techniques for binding two materials together, such as metals or plastics. This is because the force distribution is better with bonding than when alternative techniques such as riveting or welding are used. In addition, the use of bonding often makes it possible to work more rapidly, and also has the advantage of providing better insulation against external elements (dust, moisture) than the mechanical technologies.

Structural adhesives are formed from two components: a composition containing the curing agent (based on acrylate or on methacrylate) and a catalyst for curing and setting the adhesive. These two components are stored in two different compartments and are mixed at the time of application of the adhesive. This catalyst is a free-radical polymerization initiator, in particular based on peroxide, and is well known in the art.

The compositions containing the curing agent also contain other elements, such as a cure accelerator, a rheology modifier or an adhesion promoter.

The cure accelerator serves to promote curing and hardening of the adhesive when the catalyst is added. The use of tertiary amines, preferably aromatic tertiary amines, such as dimethyl-para-toluidine (DMPT), and/or 2,2'-(p-tolylimino)diethanol or dimethylaniline (DMA), is known in the art.

These cure accelerators make it possible to obtain a high degree of curing of the adhesive and to improve its mechanical performance levels and its strength in a difficult environment.

5

Such tertiary amines are in particular described in patents US 4,223,115 and EP 894 119.

However, these amines have certain disadvantages, in particular with regard to the curing parameters (gelation, exothermicity) which make them unsuitable for certain industrial applications.

In the context of the present invention, the inventors have substituted this category of tertiary amine with another category of high-molecular-weight tertiary amine which is less toxic, as described in WO 03/086327, which makes it possible to preserve the mechanical properties and the strength properties over time by virtue of a degree of curing which is just as high.

Thus, the amines used in the context of the invention are not toxic, can be used at a lower dosage than the prior art amines, and react completely with the free-radical polymerization initiator. Moreover, surprisingly, such amines improve the rapidity of gelation of adhesives, compared with the prior art amines. This makes it possible to use structural adhesives in new applications, as described hereinafter.


Document WO 98/34980 describes the use of amines as can be used in the context of the present invention, as a marker for curing owing to the change in color of the amine during the curing. The compositions described in this document thus also comprise a reducing agent for initiating curing by generating free radicals after

interaction with an oxidizing agent.

Document JP 2007 169560 describes the use of amines as usable in the context of the present invention, for coloring during curing, a polymerization initiator being used, moreover.


Thus, the invention relates to a composition that can be used in a structural adhesive, said structural adhesive being formed from said composition and from a catalyst comprising a radical polymerization initiator of peroxide type, said composition comprising:

- (a) at least one methacrylate ester monomer,
- (b) a phosphate-ester-based adhesion promoter,
- (c) a cure accelerator comprising a tertiary amine of formula I:



in which:

- the R3 group is a resonance electron-donating group comprising at least one aromatic group which is capable of forming, with the radical:



and in combination with said radical polymerization initiator, a conjugated system exhibiting an absorption in the visible field of the electromagnetic spectrum, so as to generate a coloration of said polymer or of said cement during the reaction for polymerizing said monomer,


- the R1 and R2 groups are respectively and

independently:

- linear or branched C₁ to C₁₆, preferably C₁ to C₅, groups,
- C₅ to C₃₀, preferably C₅ to C₁₀, aryl or arylalkyl groups,
- C₂ to C₁₅, preferably C₂ to C₅, alkylidene groups.

In one preferred embodiment, said R₃ group comprises at least one tertiary amine linked to an aromatic group, which makes it possible in particular to improve the activation. Thus, the composition according to the invention contains tertiary polyamines, the tertiary amine groups being borne by aromatic groups. This particular architecture makes it possible to color the adhesive during the curing phase.

In one preferred embodiment, the R₃ group comprises at least two tertiary amines linked to two distinct aromatic groups, and is in particular of the form:

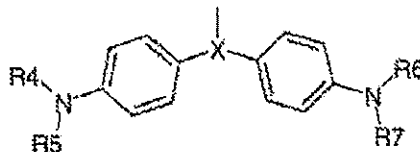


in which:

- X is chosen from: CH and N, and
- R₄, R₅, R₆ and R₇ are chosen from:
 - linear or branched C₁ to C₁₆, preferably C₁ to C₅, alkyl groups,
 - C₅ to C₃₀, preferably C₅ to C₁₀, aryl or arylalkyl groups,
 - C₂ to C₁₅, preferably C₂ to C₅, alkylidene groups.

Use is particularly preferably made, as cure accelerator in the context of the invention, of a


polyamine corresponding to the formula:

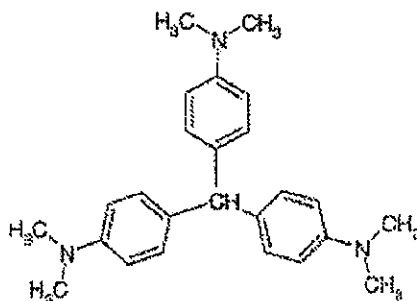

5 This tertiary triamine is 4,4',4''-methyldynetris(N,N-dimethylaniline). It is also referred to as "leuco crystal violet", "leuco" or "LCV". The symmetry of the molecule and the presence of three possible active sites for activating the radical polymerization
10 initiator make this polyamine particularly preferred for the use of the invention.

Other amines corresponding to formula (I) are described in WO 03/086327. These high-molecular-weight polyamines
15 can also be for producing a composition according to the invention. It is also possible to mix several polyamines in a composition according to the invention, or to add other cure activators, although, in one particular embodiment, the composition does not
20 comprise any cure activators other than the amines of formula (I).

It is possible to use an activator of formula (I) which is a tertiary diamine of formula (I) in which the R3
25 group is of the form:




where - X' is chosen from: CH₂, O, O-C₆H₄-O, N-H and

N-R, and

- R₈, R₉ and R are respectively and independently:

linear or branched C₁ to C₁₆, preferably C₁ to C₅, alkyl groups,
C₅ to C₃₀, preferably C₅ to C₁₀, aryl or arylalkyl groups,
C₂ to C₁₅, preferably C₂ to C₅, alkylidene groups.

The activator of formula (I) may also be chosen such that R₃ is of the form:

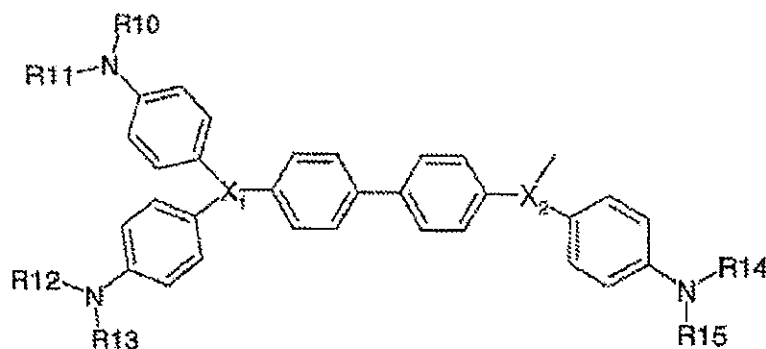

- X₁ and X₂ being chosen from: N and CH,
- R₁₀ to R₁₅ being independently:
linear or branched C₁ to C₁₆, preferably C₁ to C₅, alkyl groups,
C₅ to C₃₀, preferably C₅ to C₁₀, aryl or arylalkyl groups,
C₂ to C₁₅, preferably C₂ to C₅, alkylidene groups.

The cure accelerator is added in an amount of between 0.1% and 2% by weight in the composition, preferably between 0.2% and 1.5% by weight.

In the context of the composition according to the invention, the phosphate-ester-based adhesion promoter is preferably methacrylated. In particular, a

phosphate-ester-based adhesion promoter which is the 2-hydroxyethyl methacrylate phosphate ester is used. It may in particular be obtained under the name Genorad 40 (Rahn AG, Zurich, Switzerland). Such adhesion promoters
5 are well-known in the art, and are in particular described in US 4,223,115. Mention may thus be made of 2-methacryloyloxyethyl phosphate, bis(2-methacryloyloxyethyl phosphate), 2-acryloyloxyethyl phosphate, bis(2-acryloyloxyethyl phosphate), methyl-(2-methacryloyloxyethyl phosphate), ethyl-(2-methacryloyloxyethyl phosphate), a mixture of 2-hydroxyethyl methacrylate monophosphate and diphosphate esters (in particular the product known under the name T-Mulz 1228 (Harcros Organics, Kansas City, US)) and related
10 compounds or derivatives. Between 1% and 6% by weight of this adhesion promoter is added, preferably between 2% and 4%.

The combined use of an adhesion promoter and of a high-molecular-weight tertiary polyamine according to the invention in fact makes it possible to accelerate the gelation compared with the use of the same adhesion promoter and of a low-molecular-weight amine of the prior art.

25 In one preferred embodiment, the ester monomer (a) is a methacrylate monomer. A methacrylate monomer in which the alcohol part has a short linear chain (i.e. having one or two carbon atoms) is preferably chosen. Thus,
30 the preferred monomers according to the invention are methyl methacrylate and ethyl methacrylate.

In another embodiment, the alcohol part has at least one ring, which may be substituted or unsubstituted.
35 Thus, in this embodiment, the monomers can in particular be chosen from tetrahydrofurfuryl methacrylate, phenoxyethyl methacrylate, isobornyl methacrylate, glycidyl ether methacrylate, benzyl


methacrylate, cyclohexyl methacrylate, trimethylcyclohexyl methacrylate and hydroxyethyl methacrylate.

Mixtures of these esters can also be used. The percentage by weight of methacrylate ester in the composition is preferably between 20% and 80%, more preferably between 30% and 65%, even more preferably from 39% to 58%, i.e. approximately in the region of 50%.

10

As mentioned above, the use of cure accelerators in the compositions according to the invention makes it possible to accelerate the gelation of the adhesives using such compositions, and to modify the exothermicity peak. It may, however, be advantageous to control this gelation, and to delay it. This can be carried out by adding, to a composition according to the invention, an amine (d) chosen from the group of substituted or unsubstituted anilines, toluidines and phenols. Preference is in particular given to para-toluidines of formula:

20



The R' and R'' groups that can be used are in particular C₁ to C₆ alkyl groups, OH groups, OC_nH_{2n-1} groups with n less than or equal to 4, OOCCH₃ groups or the like, or OR groups in which R is a C₁ to C₆ alkyl. Particularly suitable amines (d) are especially N,N-bis(2-hydroxyethyl)-p-toluidine, N-methyl-N-hydroxyethyl-p-toluidine or N,N-bis(2-hydroxyethyl)-3-methylaniline, or 2,4,6-tri(dimethylaminomethyl)phenol. The amount of these amines in the composition is between 0.5% and 3%

30

by weight.

The composition may also contain a metallic acrylate or methacrylate monomer (e) (metallic salt (or comparable) of acrylic or methacrylic acid), which is in particular zinc-based. The presence of this compound in the composition makes it possible in particular to improve the mechanical performance levels of the adhesive, and also to adjust the gel and/or exothermicity times. As compound (e), use may in particular be made of zinc diacrylate, zinc dimethacrylate, zinc monomethacrylate, iron diacrylate, iron dimethacrylate, iron monomethacrylate, calcium diacrylate, calcium dimethacrylate, calcium monomethacrylate, magnesium diacrylate, magnesium dimethacrylate and magnesium monomethacrylate monomers. The amount of this salt in the composition is between 0.5% and 3% by weight.

It is preferable for the composition to also contain at least one elastomer (f). If required, it is functionalized (having a double bond at its ends, in particular methacrylate functions so as to improve the bonds with the monomers). In certain cases, a liquid elastomer is chosen. At least one functionalized elastomer, alone or as a mixture with at least one non-functionalized elastomer, is preferably used.

When the composition contains one or more elastomeric block copolymers (see below), the elastomer (f) is chosen such that it is compatible in solution with the block copolymers used. In particular, it is chosen in such a way that its Hildebrand solubility parameter is compatible with the Hildebrand solubility parameters of the block copolymers used. In particular, it is chosen in such a way that its value does not differ by more than 10% from the average of the values of the Hildebrand solubility parameters of the block copolymers used (for example, $8.3 \text{ (cal.cm}^{-3})^{1/2}$ for the

SIBS MD6455). The Hildebrand solubility parameter is well known and is calculated by the square root of the cohesive energy density of the compound. The Hildebrand solubility parameter is directly related to the dispersion forces (Van der Waals forces) which are exerted between the molecules of a chemical substance. In particular, the Hildebrand solubility parameter (expressed as $\text{cal}^{1/2}\text{cm}^{-3/2}$) of the elastomer (h) is between 8 and 9 (between 16 and 19 when the solubility parameters are expressed as $\text{MPa}^{1/2}$). Thus it is preferred to use elastomers of the polybutadiene homopolymer type (the polybutadiene then being preferably chosen to be liquid and functionalized), or polyisoprene homopolymer type. Polychloroprene (Neoprene AD10, DuPont, USA) can also be used. Butadiene-acrylonitrile copolymer elastomers, which are in particular functionalized, can also be used. The functionalities are borne by the end chains and the functional groups that can be used are carboxyl (COOH), amine (NH or NH_2), vinyl methacrylate or epoxy groups.

It is thus possible to use a functionalized polybutadiene such as HyproTM VTB 2000x168 (vinyl end groups), alone or as a blend with a polychloroprene or a nonfunctionalized polybutadiene such as HyproTM CTB 2000x162 (carboxyl end groups) (Emerald Performance Materials (EPM), Cuyahoga Falls, Ohio, USA). It is also possible to use HyproTM VTBNX or CTBNX (butadiene-acrylonitrile copolymers) having, respectively, carboxyl and vinyl functionalities, and more particularly HyproTM VTBNX 1300x43 or 1300x33.

This elastomer (f) is preferably present in an amount of between 4% and 30% by weight in the composition according to the invention, preferably between 6% and 15%, more preferably between 8% and 12%. A smaller amount of elastomer is used when the composition contains one or more block copolymers (see below).

In one particular embodiment, the composition also contains an elastomeric block copolymer containing styrene and at least one second monomer (g). Said
5 second monomer of the elastomeric block copolymer (g) is advantageously chosen from isoprene, butadiene and ethylene. In particular, the block copolymer (g) is chosen from a block copolymer containing styrene and isoprene, an elastomeric block copolymer containing
10 styrene and butadiene or ethylene, and blends thereof.

The composition according to the invention may also contain a blend of various block copolymers. Thus, in another embodiment, it comprises a styrene-isoprene-
15 styrene (SIS) block copolymer (g) and at least one block copolymer containing styrene and butadiene or ethylene (h).

When it contains butadiene, this block copolymer (h)
20 can be a styrene-butadiene-styrene (SBS) or a styrene-isoprene-butadiene-styrene (SIBS) copolymer such as Kraton MD6455 (from the company Kraton Polymers) described by Dr Donn DuBois et al., at the Adhesives & Sealants Council Meeting, Louisville, KY, 9-12 October
25 2005.

When it contains ethylene, this block copolymer (h) can be a SEBS (styrene-ethylene/butylene-styrene copolymer) or a SEPS (styrene-ethylene/propylene-styrene
30 copolymer). These compounds are available in the Kraton G range (Kraton Polymers).

In the preferred embodiment of the invention, the block copolymer (h) contains butadiene.

35

Preferably, the styrene is present in a proportion of between 15% and 50%, more preferably between 22% and 40%, even more preferably approximately 28-33% by

weight of the SBS copolymer. It is present in a proportion of between 12% and 24%, more preferably at approximately 18-19% by weight in the SIS or SIBS copolymers.

5

Preferably, the composition contains a blend of an SIS and of an SIBS in a proportion ranging from 4:1 (by weight in the composition) to 1.5:1. The preferred proportion of SIS relative to the SIBS is approximately 3:1 or 3.3:1. However, it is also possible to use a blend of SIS and of SBS in the same relative proportions as the SIS/SIBS blend. A blend of SIS, SIBS and SBS can also be used. Another block copolymer can also be added to one of these blends.

15

The SIS, SBS or SIBS block copolymers that can be used according to the invention are well known to those skilled in the art. They are in particular produced by the company Kraton Polymers (Houston, Texas, USA). Thus, the Kraton D1160 SIS described in US 20050238603 or Kraton K1161, the Kraton D1102 SBS described in US 5,106,917 and the Kraton MD6455 or Kraton MD 6460 SIBS can be used.

20

Those skilled in the art know how to select the SIS, SIBS or SBS block copolymers that can be used in the composition according to the invention, from those which exist, according in particular to their ability to dissolve in the monomers used, or to their tensile mechanical strength.

30

Preferably, the composition according to the invention comprises between 5% and 30% by weight, preferably between 12% and 25%, and more preferably between 15% and 25%, of the elastomeric block copolymer(s).

35

In one particular embodiment, the composition according to the invention contains an elastomeric block

copolymer containing styrene and isoprene and at least one elastomeric block copolymer containing styrene and butadiene, i.e. an SIS/SIBS blend, an SIS/SBS blend, or an SIS/SIBS/SBS blend.

5

In another embodiment, the composition according to the invention contains a single elastomeric block copolymer, containing styrene and isoprene, i.e. an SIS.

10

In another embodiment, the composition according to the invention contains a single elastomeric block copolymer, containing styrene and butadiene, chosen from an SIBS or an SBS.

15

If the composition contains one or more block copolymers, the relative proportions of the blend of block copolymers ((g) and/or (h)) and of the elastomer (f) are between 4:1 and 0.5:1 by weight in the composition, preferably approximately 2:1. However, it is also possible to have relative proportions of the order of approximately 0.5:1.

20

The composition according to the invention may also contain elastomeric polymeric particles (i). These particles are called "core-shell", are well known to those skilled in the art, and are formed from a "hard" thermoplastic shell, preferably based on poly(methyl methacrylate) (PMMA), and from an elastomeric core generally based on butadiene, often copolymerized with styrene, or acrylic-based. In the use of the invention, mention may especially be made of acrylonitrile-butadiene-styrene (ABS), methacrylate-butadiene-styrene (MBS), methacrylate-acrylonitrile-butadiene-styrene (MABS) and methacrylate-acrylonitrile polymers, and blends thereof.

30

35

These particles contain a crosslinked elastomeric core

surrounded by a thermoplastic shell, which is often a methyl methacrylate polymer (PMMA). Patents US 3,985,703, US 4,304,709, US 6,433,091, EP 1256615 or US 6,869,497 describe in particular such particles,
5 which are thus well known to those skilled in the art.

In particular, impact-modifying particles are preferred, particularly MBS impact modifiers. In one preferred embodiment, these MBSs have a slight
10 crosslinking of the polymer forming the core. In addition, these MBSs, in addition to their impact resistance, also preferably have a shock-induced crack resistance.

Core-shell polymers are available from many companies. Mention may thus be made of GE Plastics or Arkema (Paris, France). The preferred particles are in particular of the Clearstrength C301, C303H, C223, C350, C351, E920 or C859 type from Arkema, the C301 and
20 C303H MBSs being preferred. It is also possible to use Durastrength D300 or D340 from Arkema, having an acrylic core surrounded by a PMMA shell. Likewise, it is also possible to use the MBSs developed by Rohm & Haas (Philadelphia, PA, United States), in particular
25 Paraloid™ BTA 753.

These particles (i) may be used by themselves or as a mixture. Thus, in one particular embodiment of the invention, a mixture of MBS particles (in particular
30 C303H or C301) and of particles having a PMMA shell and an acrylonitrile core (in particular D340 particles) is used.

Preferably, these particles (i) are present in the
35 composition in an amount of between 2% and 20% by weight of the composition, preferably between 5% and 15% by weight.

In one particular embodiment, the composition also contains at least one acrylic ester monomer (j) in which the alcohol part has a linear chain of at least 6 carbon atoms (a long-chain monomer). Thus, it is preferred to use lauryl methacrylate, 2-ethylhexyl methacrylate, 2-ethylhexyl acrylate, esters based on polyethylene glycol, or mixtures of these esters. It is preferable for the composition to contain at most 10%, more preferably at most 8%, or even at most 5% by weight in total of these long-chain acrylic monomers. In one particular embodiment, the composition comprises a mixture of two long-chain acrylic ester monomers. Preferably, when the composition contains only a single acrylic ester monomer (h), it is preferable for it to be present in an amount of less than or equal to 8% by weight, although it is acceptable for there to be an amount thereof of between 8% and 10% when the composition contains a mixture of these esters (j). In this case, it is preferred for each to be present at no more than 5%.

The composition may also contain other monomers such as acrylonitrile, methacrylonitrile or styrene.

The composition according to the invention may also contain an acid monomer such as an acid monomer that can be polymerized by free radicals, known in the art, of the unsaturated carboxylic acid, maleic acid, crotonic acid, isophthalic acid and fumaric acid type. It is also possible to add isobornyl acrylate (IBXA), 2-hydroxyethyl methacrylate (HEMA), 2-hydroxypropyl methacrylate (HPMA), 2-(perfluorooctyl)ethyl acrylate (POA), tetrahydrofurfuryl acrylate (THFA) or isobutoxymethylacrylamide (IBMA). Mixtures of these compounds, in particular a mixture of HEMA and HPMA, may be added. Methacrylic acid or acrylic acid or HEMA is preferred. Between 2% and 10% of this compound, preferably between 3% and 7%, are added.

The composition according to the invention may also contain, in its preferred embodiments, at least one additional compound such as a rheology modifier. The rheology modifier serves to provide good viscosity of the composition according to the invention, so that it can be easily applied to the surfaces to be bonded. Polyamides such as Disparlon 6500 (Kusumoto Chemicals Ltd, Japan) or pulverulent elements based on silica or the like (untreated fumed silica or pyrogenic silica) may be used.

The composition may also contain metal ions, and also other compounds such as saccharin (a sweetener authorized in Europe under number E-954, also called 1,1-dioxo-1,2-benzothiazol-3-one) or its derivatives (see WO 87/000536), and/or 1'-acetyl-2-phenylhydrazine (between 0.1% and 5% by weight).

Other components such as mineral fillers (TiO_2 , CaCO_3 , Al_2O_3 , zinc phosphate), ultraviolet stabilizers (such as 2-hydroxyphenyltriazine, Tinuvin 400 from Ciba-Geigy) and wax may also be added to the composition according to the invention. Free-radical polymerization inhibitors such as BHT, or benzoquinones such as naphthoquinone, hydroquinone or ethylhydroquinone may also be added in order to increase the lifetime of the composition.

In another embodiment, the invention relates to a composition comprising a methacrylate ester monomer, a cure accelerator/initiator comprising a tertiary amine of formula (I) as defined above, and saccharin (or a saccharin derivative). In this embodiment, it may be advantageous for this composition to contain an acid monomer, in particular HEMA. In this embodiment, the presence of the adhesion promoter (b) is preferred, but is not obligatory. In this embodiment, the composition may also contain the components (d) to (j) as described

above, and also the other components mentioned above.

As mentioned above, the structural adhesives are formed from two components which are a composition according to the invention and a catalyst for curing and setting the adhesive. These two components are stored in two different compartments and are mixed at the time of application of the adhesive.

As mentioned, a catalyst which is a free-radical polymerization initiator, and which is in particular peroxide-based, is chosen. Such catalysts are well known in the art. Benzoyl peroxide, tert-butylperoxybenzoate and cumene hydroperoxide may in particular be chosen. It is preferred when the catalyst contains between 5% and 40% by weight of peroxide, in particular approximately 20% by weight of peroxide. A paste containing approximately 20% of benzoyl peroxide is in particular used. This catalyst is in particular contained in a plasticizer such as diisobutyl phthalate or benzyl phthalate.

The catalyst is used in a ratio of from 1:1 to 1:30 (by volume), preferably from 1:5 to 1:30, even more preferably approximately 1:10, relative to the second component, which is the composition according to the invention.

The invention thus relates to the combined use of a composition according to the invention and of a catalyst comprising a free-radical polymerization initiator of peroxide type in a method for adhesively bonding one material to a second material, and in particular when at least one of the materials is metallic.

The use of a composition according to the invention and of a catalyst therefore makes it possible to bond

metals, plastics and composites to a composite and thus can be applied in particular in the field of silo, boat or truck trailer construction. It can also be used in the automotive construction field or the railroad field.

Thus, the composition enables a material to be adhesively bonded to another material, one or the other material being in particular a metal, a plastic, wood or a composite. The composition may therefore be used in one or other of the following applications: metal/metal, metal/composite, metal/plastic, metal/-wood, wood/plastic, wood/composite, wood/wood, plastic/composite, plastic/plastic or composite/-composite adhesion.

The composition according to the invention is also particularly advantageous when a material has to be bonded to a composite or a metal.

The flexible methacrylate structural adhesives having high mechanical performance obtained with the composition according to the invention are resilient and resistant to shocks and vibrations. They make it possible to produce adhesive joints between materials of the same or different chemical nature, for example: concrete, wood, ceramics, glass, ferrites, aluminum, anodized aluminum, steel, galvanized steel, stainless steel, painted metals, steel, copper, zinc, ABS, PVC, polyester, acrylics, polystyrene, gel-coat polyester or epoxides, composites, glass-fiber-reinforced composites, laminates, honeycomb structures and any painted or lacquered material. The structural adhesives obtained with the composition according to the invention are particularly advantageous for bonding galvanized steel or electrogalvanized steel.

They can also fill large gaps between substrates of

different and variable thickness, roughness or flatness, with better stress distribution.

5 The flexibility of this composition thus makes it possible to take up the forces of differential dilations between the substrates over long lengths of several meters, reducing and eliminating the geometrical faults (angle, roughness, flatness).

10 The applications and activity sectors involved comprise in particular:

Bonding of reinforcements, rails, frame structures, beams, stiffeners, panels, partitions, fasteners, supports, body components, reinforcing brackets, inserts, cylindrical and conical components, hinges, frames, etc.; bonding with lamination take-up on partitions, bonding with filling requiring high mechanical strength;

20

In particular bonding of any bonded structural or mechanical component from the following fields of construction: shipbuilding, automotive, railroad (and infrastructure), aeronautical, aerospace, electronic, electromechanical and domestic electrical equipment, military structures, shop signs, traffic (and advertising) signs, urban furniture, exterior joinery (windows, picture windows, French doors, entry doors and garage doors), wind machines, containers, engineering structures and infrastructures (in particular suspension bridges, offshore oil platforms and aircraft hangers), construction and fastening, curtain walling and solar panels.

35 When the adhesive produced with a composition according to the invention exhibits a rapid gelation, this makes it possible to solve the following problems:

- magnet bonding in the manufacture of

- loudspeakers: rapid progression to gel time on the assembly line in fact makes it possible to immobilize or fix the parts rapidly without them having the time to slide on one another with a high production rate enabling a bonding procedure to be carried out every 2 minutes instead of every 4 minutes.
- 5 - Magnet bonding (manufacture of windshield-wiper motors, small motors), assembly of electronic components.
 - 10 - Bonding of rearview mirror inserts on a windshield: metal and plastic on laminated glass (for the repair, the operator does not have to hold the insert on the glass for more than one to two minutes).
 - 15 - Bonding of inserts vertically on supports made of metals and composites: stainless steel male insert on a square plate 32 × 32 mm onto which a tapped bushing is welded: it involves a male insert with a perforated plate 38 mm in diameter, onto which an M6 threaded stud 25 mm in length is welded (see in particular the Bighead^(R) inserts (Bighead Bonding Fastener, Bournemouth, GB)). Rapid bonding with a gel time is necessary in order to avoid the perforated insert sliding on the vertical support. The adhesive rapidly plays its role of rivet in the perforations of the insert.
 - 20 - Rapid positioning on high production rate assembly lines and on many materials.
 - 25 - Positioning and bonding of packing pieces.
 - 30 - Rapid assembly on an assembly line with gaps that may be large, up to 5 mm, and on a multitude of materials: aluminum, steel, galvanized steel, stainless steel, electro-galvanized steel, bronze, lacquered steel, thermoplastics, glass, and composites.
 - 35 - Bonding on wood and plywood, making it possible

to prevent the wood absorbing the monomers too rapidly.

Examples

5 The examples below illustrate the invention without restricting the scope thereof.

Example 1: raw materials used and methodology

The following components were used:

Composition

10 methacrylate ester monomer (a): methyl methacrylate (MMA)/isobornyl methacrylate/hydroxyethyl methacrylate
functionalized liquid elastomer (f): HYPRO™ VTB 2000x168 (EPM, USA)
15 acid monomer: methacrylic acid (MAA)
adhesion promoter (b): phosphate methacrylate Genorad 40 (Rahn AG)
cure accelerator (c): 4,4',4"-methylidyne-tris(N,N-dimethylaniline) (LCV)
20 cure accelerator (control): N,N-dimethylaniline (DMA), or dimethyl-para-toluidine (DMPT)
toluidine (d): N,N-bis(2-hydroxyethyl)-p-toluidine (PTE)
zinc dimethacrylate (e): SR 708 (Sartomer)
25 fillers: metal ions, rheology modifiers, pulverulents
SIS copolymer (g): Kraton D1160 (Kraton Polymers)
SIBS copolymer (h): Kraton MD6455 (Kraton Polymers) 25
30 rheology modifier: Disparlon 6500 (Kusumoto Chemicals)
elastomeric polymeric particles (i): Clearstrength C303H (Arkema).

35 Catalyst

benzoyl peroxide at 20%.

Ratio of composition:catalyst mixture = 10:1.

The tensile shear strength (SS) was measured according to the ISO 4587 standard. Briefly, 2024T3 aluminum test pieces measuring 100 × 25 × 1.6 mm (L × W × T) were used. Two test pieces were bonded to each other, the overlap area being 25 × 12 mm (300 mm²), with an adhesive joint thickness of approximately 200 to 400 μm. The force needed to break the adhesive joint was then measured by pulling on the two test pieces.

In order to be industrially useable, it is preferable for it to be possible to handle the adhesive for several minutes (which corresponds to the gel time) and for the adhesive to cure rapidly after gelation. It is preferable for the maximum exothermicity time to be close to the gel time so that the user can rapidly handle his or her parts.

The gel time and the maximum exothermicity peak were also measured.

Example 2: use of a high-molecular-weight polyamine

The following compositions were analyzed:

Components	A1	A2	A3	A4	A5
Methyl methacrylate	28.5	28.5	28.5	27.0	29.0
VTB 2000x168	28.0	28.0	28.0	28.0	28.0
Isobornyl methacrylate	5.5	5.5	5.5	5.5	5.5
Hydroxyethyl methacrylate	6.0	6.0	6.0	6.0	6.0
Methacrylic acid	4.0	4.0	4.0	4.0	4.0
Genorad 40	3.0	3.0	3.0	3.0	3.0
SR 708	-	-	-	1.5	-
DMA	1.0	-	-	-	-
DMPT		1.0			-

PTE					-
LCV	-	-	1.0	1.0	0.5
Fillers	24.0	24.0	24.0	24.0	24.0
Gel time (on 20 gr)	9min25s	4min10s	54s	54s	2min33s
Maximum exothermicity	15min40s 108°C	7min36s 116°C	8min28s 119°C	2min36s 109.5°C	71min48s 89°C
Shear strength	16.7 MPa	15.7 MPa	15.3 MPa	17.9 MPa	15.8 MPa
Fracture surfaces	100% cohesive	100% cohesive	100% cohesive	100% cohesive	100% cohesive

Formulation A1: uses an amine as described in the prior art (control).

Formulation A2: uses an amine as described in the prior art (control).

Formulation A3: the gel time is very rapid, the exothermicity peak being more distant.

Formulation A4: use of SR 708 from Sartomer in combination with LVC: this metallic dimethacrylate monomer accelerates the curing rate (exothermicity time) and improves mechanical performance.

These results therefore show that the use of a high-molecular-weight polyamine makes it possible to accelerate the gelation, while at the same time maintaining an exothermicity peak distant from this gelation. The addition of various components to the mixture makes it possible to control the gelation and the exothermicity peak, while maintaining or improving mechanical performance.

Example 3: bonding of hot-dipped galvanized steel to itself

Measurement of the shear strength according to the protocol of the ISO 4587 standard (galvanized steel test pieces).

Components	B1	B2	B3	B4	B5
Methyl methacrylate	28.1	27.4	25.4	26.25	28.25
1,4-Naphtho-quinone	0.003	0.003	0.003	0.003	0.003
VTB 2000x168	28.0	28.0	28.0	28.0	28.0
Isobornyl methacrylate	5.5	5.5	5.5	5.5	5.5
Hydroxyethyl methacrylate	6.0	6.0	6.0	6.0	6.0
Methacrylic acid	4.0	4.0	4.0	4.0	4.0
Genorad 40	3.0	3.0	3.0	3.0	3.0
Saccharin	-	-	2.0	2.0	-
DMA	-	0.9	0.9	-	-
PTE	1.4	1.2	1.2	1.2	1.2
LCV	0.5	-	-	0.05	0.05
Fillers	23.5	24.0	24.0	24.0	24.0
Shear strength	15.7 MPa	1.1 MPa	9.3 MPa	8.2 MPa	1.5 MPa
Fracture surfaces	100% cohesive	100% adhesive	100% adhesive	100% adhesive	100% adhesive

NB: The shear strength of formulation B1 was performed on aluminum. For B1, gel time (on 20 gr): 11 min 52 s. Maximum exothermicity: 14 min 36 s, 104°C. The gelation time is thus delayed and is close to the maximum exothermicity time. This adhesive is particularly suitable for uses in the field of bonding large parts.


Example 4: bonding of electrogalvanized steel to itself

10 Measurement of the shear strength according to the protocol of the ISO 4587 standard (electrogalvanized steel test pieces).


Components	C1	C2	C3	C4	C5
Methyl methacrylate	49.997	49.997	47.997	47.997	48.797
1,4-Naphtho-quinone	0.003	0.003	0.003	0.003	0.003
Kraton D1160	16.0	16.0	16.0	16.0	16.0
Kraton MD6455	5.0	5.0	5.0	5.0	5.0
VTB 2000x168	7.0	7.0	7.0	7.0	7.0
A2EH	4.0	4.0	4.0	4.0	4.0
HEMA	4.0	4.0	4.0	4.0	4.0
Genorad 40	2.0	2.0	2.0	2.0	2.0
Methacrylic acid	4.0	4.0	4.0	4.0	4.0
Saccharin	-	-	2.0	2.0	2.0
DMPT	0.9	-	-	0.9	-
DMA	-	0.9	0.9	-	-
LCV	-	-	-	-	0.1
PTE	0.6	0.6	0.6	0.6	0.6
ClearStrength 303H	4.0	4.0	4.0	4.0	4.0
Disparlon 6500	2.5	2.5	2.5	2.5	2.5
Shear strength	1.3 MPa	2.7 MPa	19.1 MPa	5.2 MPa	18.3 MPa
Fracture surfaces	100% adhesive	100% adhesive	100% cohesive	100% adhesive	100% cohesive

Claims

1. A composition that can be used in a structural adhesive, said structural adhesive being formed from said composition and from a catalyst comprising a radical polymerization initiator of peroxide type, said composition comprising:
- 5 (a) at least one methacrylate ester monomer,
- (b) a phosphate-ester-based adhesion promoter,
- 10 (c) a cure accelerator comprising a tertiary amine of formula I:



- 15 in which:
- the R3 group is a resonance electron-donating group comprising at least one aromatic group which is capable of forming, with the radical:



- 20 and in combination with said radical polymerization initiator, a conjugated system exhibiting an absorption in the visible field of the electromagnetic spectrum, for generating coloration of said polymer or of said cement during the reaction for polymerization of said monomer,

- 25 - the R1 and R2 groups are respectively and independently:


- 30 • linear or branched C₁ to C₁₆, preferably C₁ to C₅, alkyl groups,
- C₅ to C₃₀, preferably C₅ to C₁₀, aryl or

arylalkyl groups,

- C₂ to C₁₅, preferably C₂ to C₅, alkylidene groups.

5 2. The composition as claimed in claim 1, characterized in that said R₃ group comprises at least one tertiary amine linked to an aromatic group.

10 3. The composition as claimed in either of claims 1 or 2, characterized in that the R₃ group is a group of the form:

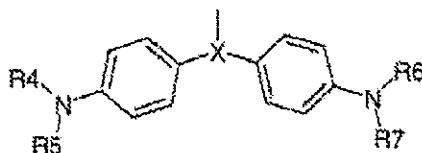


15

in which:

- X is chosen from: CH and N, and
- R₄, R₅, R₆ and R₇ are chosen from:
 - linear or branched C₁ to C₁₆, preferably C₁ to C₅, alkyl groups,
 - C₅ to C₃₀, preferably C₅ to C₁₀, aryl or arylalkyl groups,
 - C₂ to C₁₅, preferably C₂ to C₅, alkylidene groups.

25

4. The composition as claimed in one of claims 1 to 3, characterized in that said cure accelerator corresponds to the formula:

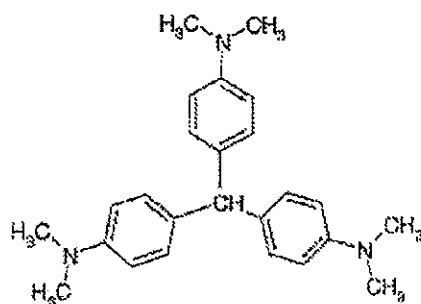

5. The composition as claimed in one of claims 1 to 4, characterized in that said phosphate-ester-based adhesion promoter is methacrylated.
6. The composition as claimed in one of claims 1 to 5, characterized in that said phosphate-ester-based adhesion promoter is the 2-hydroxyethyl methacrylate phosphate ester or a mixture of 2-hydroxyethyl methacrylate monophosphate and diphosphate esters.
7. The composition as claimed in one of claims 1 to 6, characterized in that it also comprises an amine (d) chosen from the group constituted of substituted or unsubstituted toluidines, anilines and phenols.
8. The composition as claimed in one of claims 1 to 7, characterized in that it also comprises a metallic acrylate monomer (e).
9. The composition as claimed in one of claims 1 to 8, characterized in that it also contains at least one elastomer (f).
10. The composition as claimed in claim 9, characterized in that said elastomer (f) is chosen from functionalized or nonfunctionalized polybutadiene, polyisoprene, and blends of these components.

11. The composition as claimed in one of claims 1 to 10, characterized in that it also contains an elastomeric block copolymer containing styrene and at least one second monomer (g).
12. The composition as claimed in claim 11, characterized in that said second monomer of the elastomeric block copolymer (g) is chosen from isoprene, butadiene and ethylene.
13. The composition as claimed in claim 11 or 12, characterized in that said elastomeric block copolymer (g) is a styrene-isoprene-styrene (SIS) copolymer, and in that it also contains at least one elastomeric block copolymer containing styrene and butadiene or ethylene (h).
14. The composition as claimed in claim 13, characterized in that said one elastomeric block copolymer (h) is chosen from a styrene-butadiene-styrene (SBS) copolymer and a styrene-isoprene-butadiene-styrene (SIBS) copolymer.
15. The composition as claimed in one of claims 1 to 14, characterized in that it also comprises particles (i) formed from a thermoplastic shell and from an elastomeric core.
16. The composition as claimed in claim 15, characterized in that said particles (i) are chosen from acrylonitrile-butadiene-styrene, methacrylate-butadiene-styrene, methacrylate-acrylonitrile-butadiene-styrene and methacrylate-acrylonitrile particles, and mixtures thereof.
17. The composition as claimed in one of claims 1 to 16, characterized in that it also comprises at

least one acrylate ester monomer (j) in which the alcohol part has at least one linear chain of at least 6 carbon atoms.

- 5 18. The composition as claimed in claim 17, characterized in that said one acrylate ester monomer (j) is a methacrylate or acrylate monomer.
- 10 19. The composition as claimed in either of claims 17 and 18, characterized in that it contains a mixture of two acrylate monomers (j).
- 15 20. The composition as claimed in one of claims 1 to 19, characterized in that it also contains at least one additional compound chosen from a rheology modifier and an acid monomer.
- 20 21. The combined use of a composition as claimed in one of claims 1 to 20 and of a catalyst comprising a radical polymerization initiator of peroxide type in a method for adhesively bonding one material to a second material.
- 25 22. The use as claimed in claim 21, characterized in that at least one material is metallic.