

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 July 2007 (26.07.2007)

PCT

(10) International Publication Number
WO 2007/082988 A1

(51) International Patent Classification:

A62C 31/02 (2006.01) A62C 37/08 (2006.01)
A62C 35/68 (2006.01) B05B 15/00 (2006.01)

(21) International Application Number:

PCT/FI2007/000010

(22) International Filing Date: 11 January 2007 (11.01.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

U20060022 18 January 2006 (18.01.2006) FI
20060217 6 March 2006 (06.03.2006) FI

(71) Applicant (for all designated States except US): **MARIOFF CORPORATION OY** [FI/FI]; P.O. BOX 86, Virnatie 3, FI-01300 Vantaa (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SUNDHOLM, Göran** [FI/FI]; Ilmari Kiannon Kuja 3, FI-04310 Tuusula (FI). **METZGER, Harry** [FI/FI]; Aleksis Kiven Tie 49, FI-04200 Kerava (FI).


(74) Agent: **HEINÄNEN OY**; Annankatu 31-33 C, FI-00100 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SPRINKLER

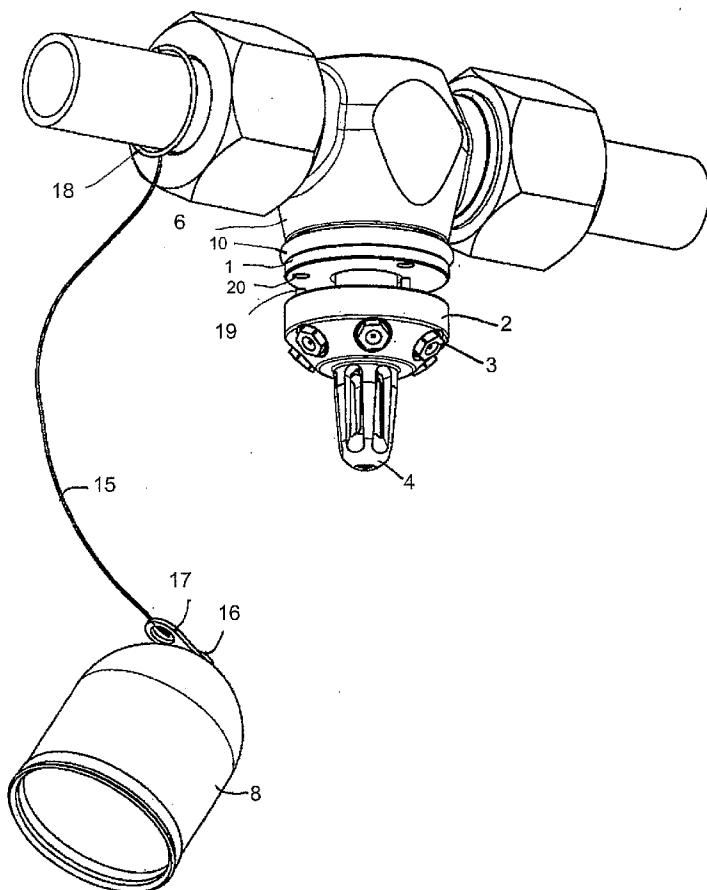

(57) Abstract: A sprinkler which comprises a sprinkler frame (2), in which there is at least one nozzle (3), a heat-activated triggering element (5), and a protective element (8) which is in front of the nozzle (3) in the protective position and mechanically protects the triggering element (5) when the sprinkler is in a non-active mode, and which protective element (8) is movable to a second position in which the nozzles (3) and the triggering element (5) are not protected by the protective element (8). The sprinkler frame (2) is movable in relation to a fastening frame (1) between two positions, a first position in which the sprinkler is in a non-active mode, and a second position in which the sprinkler frame is protruding, and which sprinkler frame (2) is arranged movable from the effect of the pressure of medium in relation to the fastening frame (1) from the first position to the second position and at the same time to direct a force to the protective element (8) for moving it from the protective position to the second position, whereby the sprinkler is in the second position of the sprinkler frame set to a standby mode.

WO 2007/082988 A1



Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.