

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2003 (21.08.2003)


PCT

(10) International Publication Number
WO 03/069747 A2

- (51) International Patent Classification⁷: **H02G**
- (21) International Application Number: PCT/IT03/00064
- (22) International Filing Date: 10 February 2003 (10.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
BS2002A000010 13 February 2002 (13.02.2002) IT
- (71) Applicant (for all designated States except US): **BBI ELECTRIC S.P.A.** [IT/IT]; Via Einaudi, I-25030 Torbole Casaglia (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **GHIDINELLI, Paolo** [IT/IT]; Via Einaudi, I-25030 Torbole Casaglia (IT).
PETRONE, Libero [IT/IT]; Via Einaudi, I-25030 Torbole Casaglia (IT).
- (74) Agent: **SANGIACOMO, Fulvia**; Biesse S.R.L., C.SO Matteotti, 42, I-25122 Brescia (IT).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: FIXING DEVICE FOR CONTIGUOUS ELEMENTS OF ELECTRICAL CONDUCTORS

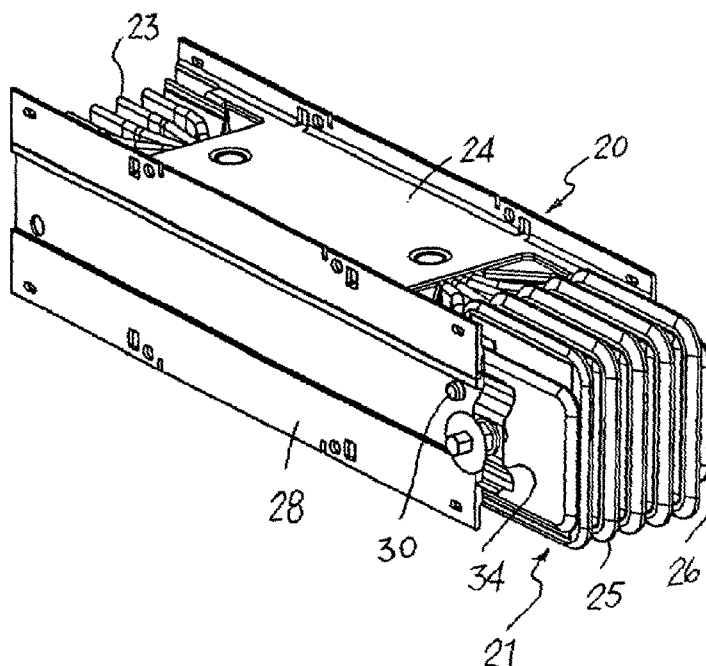

(57) Abstract: The invention concerns a fixing device for conductor elements (20) of prefabricated electrical ducts, which include one, two or more suspension pins (30), on each of the side walls of a block joint (21), to be used to engage corresponding holes (29) provided in the opposite sides of the housing or profile of a conductor element, and a flexible spacer (34) working in conjunction with a fixing bolt passing through the block joint and inserted between the housings or profiles of two contiguous conductor elements to limit their approach movement when coupled to the block joint.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.