

THIS SHEET HAS BEEN REPLACED

FOOD OR DRINK CONTAINER

This invention relates to a food or drink container and more particularly to a container with an integrally formed handle or handles which can be assembled from a stacking position to a position of use.

Stackable one-piece containers with an integrally formed handle are known, but these are relatively complex in their construction and their method of assembly and have the disadvantage that the handle may be unstable when the container is filled with hot food or drink.

An aim of the present invention is to provide an improved food or drink container which overcomes the above disadvantages.

According to the present invention there is provided a food or drink container comprising a cup-shaped part formed with at least one integral winged projection which can be folded from a stacking position for the container into a handle to hold and support the cup-shaped part wherein the winged projection has means to lock the free end of the handle to the cup-shaped part.

Preferably, the container is made from a plastics material by an injection moulding process.

Conveniently, the winged projection extends radially from the rim of the cup-shaped part to facilitate nesting of a plurality of the containers.

In an alternative construction the cup-shaped part has two winged projections extending radially from opposite sides of the rim of the cup-shaped parts.

The means to lock the handle is preferably an angle-shaped part with a series of parallel lateral grooves which clip onto a shoulder of the base of the cup-shaped part of the container.

The shape of the winged projection may take the form of a hollow tube section having a rectangular, round oval or octagonal cross-section to simulate a

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

conventional cup handle.

Preferably, the winged projections have locking means to secure the winged projections together.

In a preferred construction the locking means is a pin on one winged projection engaging a hole in the other winged projection.

Embodiments of the stackable container will now be described by way of example only, with reference to the accompanying drawings, in which:

10 Fig. 1 is a perspective view of a first embodiment of a container with a single winged projection in the horizontal position, for stacking;

Fig. 2 is a similar view of the container to Fig. 1 with the winged projection folded downwards in the 15 direction of the arrows;

Fig. 3 is a perspective view of the container of Figs. 1 and 2 with the winged projection folded to form a handle;

Fig. 4 is a perspective view of a stack of nested 20 containers, according to the invention, each container having a single handle;

Fig. 5 is a perspective view of a stack of three nested containers each having two handles.

Fig. 6 is a perspective view of a second embodiment 25 of a container with winged projections to be folded upwards;

Fig. 7 is a fragmentary section of the container of Fig. 6 with the handle formed by the winged projections secured to the base of the container;

30 Fig. 8 is a side elevation of a modified container with locking means for the winged halves of the handle; and

Fig. 9a is a sectional detail of the locking means in the unlocked position while Fig. 9b is a sectional 35 detail of the locking means in the locked position.

The container may be used e.g. as a cup for

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

containing drinks or as a bowl for hot food such as soup or rice.

Each container 1 has a cup-shaped part 2 which tapers from an upper rim 3 to a cone or round shaped base 4 terminating in a base rim 5 with a cutaway portion 6 forming an angled edge 7.

Extending radially from the upper rim 3 is a winged projection 8 the centre part 9 of which is horizontal to the upper rim. Two fold lines 10 are formed in the part 9 to facilitate the folding of the two wings 12a and 12b downwards as shown by the arrows 'A' in Fig. 2.

The edge walls 13 of the wings 12a and 12b engage and abut each other in their fully folded down position to form a resilient handle as shown in Fig. 3.


The free ends of the two wings 12a and 12b have angle shaped abutments 14 with transverse grooves 15 on their inner edges, which in the assembled handle engage an angled surface 7 formed by the base of the cup 2. The engagement of the abutments 14 with the angled surface 7 locks the handle to the lower edge of the cup 2 to form a stable handle for the container.

As shown in Fig. 4 a plurality of containers 1 are nested in a stack to reduce their volume when stored for transport such as in aircraft or when located in a drink or food dispensing machine the containers 1 nest closely with their winged projection 8 lying flush with the winged projection of an adjacent container.

Fig. 5 is a similar stack of three nested containers 1 which each have two winged projections 8 extending radially from opposite sides of the upper rim 3 of the cup 2.

In the preferred construction the handle wings 12a and 12b are each moulded with walls 16 which form a hollow tubular section with a shaped aperture simulating that of a conventional cup handle. However, it will be understood that this may take the form of a rectangular,

This Sheet Has Been Replaced





round, oval or octagonal cross-section. It is also possible to leave out the inner wall of the wing so that the handle is similar to a conventional loop handle.

The winged projection is formed integrally with the side of the cup or bowl but its strength does not rely on the distortion of the material but on the cantilever principle achieved by the lock formed between the parts 14 and 7.

Although the wings 12a and 12b are connected to the centre part 9 by the fold lines they form a permanent integral part of the container. When rotated through 90° the wings are sufficiently stable to allow torsion to exert pressure in an over centre clip at the cup base which is integral with the cup. By using the base clip, if the container is used with a hot liquid, the wings of the handle remain locked unless deliberate force is applied to unclip the base lock. The base attachment clip of the handle also provides an applied extension of the base of the container improving the stability of the cup by moving the centre of gravity to compensate for the weight of the handle.

In a second embodiment of the container shown in Figs. 6 and 7, like parts have the same reference numerals as in the embodiment of Figs. 1 to 3.

In this second embodiment the wings 12a and 12b lie in a plane level with the upper rim 3 of the cup-shaped part 2. The wings are assembled into a handle by folding them along the fold lines 10 of the centre part 9 in an upward direction as shown by the arrows B. The assembled handle wings are pivoted downwards as shown by the dotted arrows C so that the centre part 9 engages the cup-shaped wall at 17 and the angle-shaped abutments 14 clip onto the angled edge 7 locking the wings 12a and 12b together forming a stable handle to support the cup-shaped part 2 and its contents.

In a third embodiment of the container 1 the winged



THIS SHEET HAS BEEN REPLACED

projections 8 are folded downwards so that their edge walls 13 engage and the winged projections are held together by locking means in the form of a pin 15 on one projection 8 engaging a hole 16 formed in the other 5 projection 8. Each winged projection may have a pin 15 and a hole 16 as shown in Fig. 8. Figs. 9a and 9b show the locking means in the open and locked positions, respectively. The pin and hole engage each other with an interference fit to provide a resilient locking of the 10 two winged projections.

The free ends of the winged projections 8 each have a keyway 17 introduced into the base pin. This keyway 17 is modified to suit and carry a key detail providing a secure locking of the free ends of the winged projections 15 to the base of the cup container 2.

The container of the present invention enables the stacking of the containers to conserve space and for ease of transport, reducing the space by a ratio of at least one in ten.

20 The moulded container is 49 to 50% lighter than conventional plastic cups at present used by airlines. As an example in the case of drinking cups used on Concorde where china cups are used, the weight reduction would be from 275 grams down to 15 grams equivalent per 25 cup.

The containers can be manufactured by an injection moulding process which eliminates the conventional core moulding tool used at present in the making of plastic cups for airlines to reduce significantly the overall 30 cost. Multiple impressions can be achieved simultaneously on one pair of matching die faces and thus produce them more efficiently and economically. The finished product can of course be made of white or multi-coloured plastics material with a shiny or matt surface 35 and can be 'clinically' clean when delivered.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



6

CLAIMS:

1. A food or drink container comprising a cup-shaped part formed with at least one integral winged projection which can be folded from a stacking position for the container into a handle to hold and support the cup-shaped part, wherein the winged projection has means to lock the free end of the handle to the cup-shaped part.
2. A container as claimed in Claim 1, wherein the container is made from a plastics material by an injection moulding process.
3. A container as claimed in Claim 1 or 2, wherein the winged projection extends radially from the rim of the cup-shaped part to facilitate nesting of a plurality of the containers.
4. A container as claimed in any preceding claim, wherein the cup-shaped part has two winged projections extending radially from opposite sides of the rim of the cup-shaped part.
5. A container as claimed in any preceding claim, wherein the means to lock the handle is an angle-shaped part with a series of parallel lateral grooves which clip onto a shoulder of the base of the cup-shaped part of the container.
6. A container as claimed in any preceding claim, wherein the shape of the winged projection may take the form of a hollow tube section having a rectangular round, oval or octagonal cross-section to simulate a conventional cup-handle.
7. A container as claimed in any preceding claim, wherein the winged projections of the handle are swung downwards to form the handle.
8. A container as claimed in any of Claims 1 to 6, wherein the winged projections of the handle are swung upwards to form the handle.
9. A container as claimed in any preceding claim, wherein the winged projections have locking means to



* C L M S *

THIS SHEET HAS BEEN
REPLACED




secure the winged projections together.



10. A container as claimed in Claim 9, wherein the locking means are a pin on one winged projection engaging a hole in the other winged projection.

This Sheet Has Been Replaced



* C L M S *

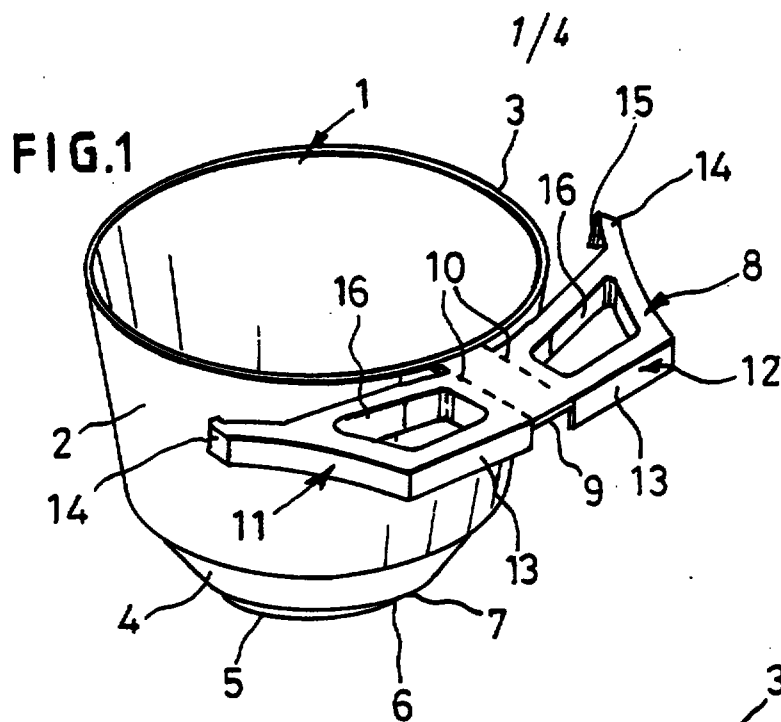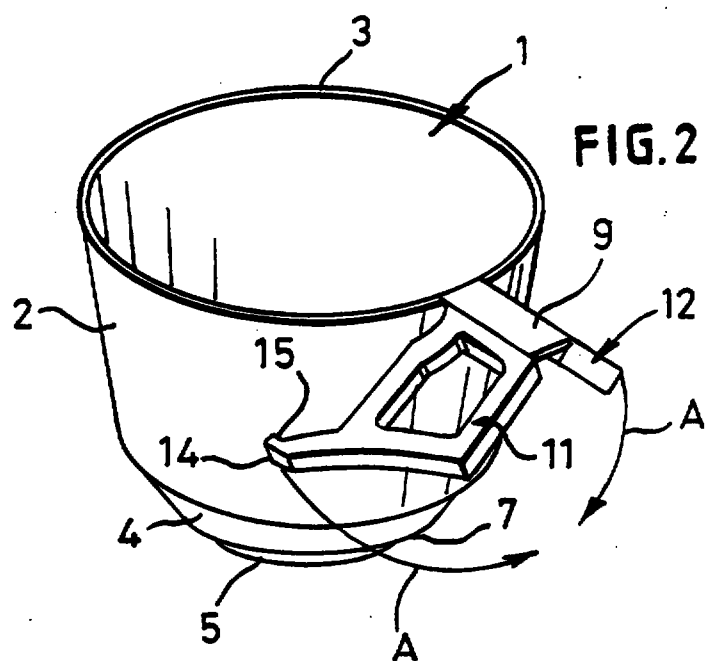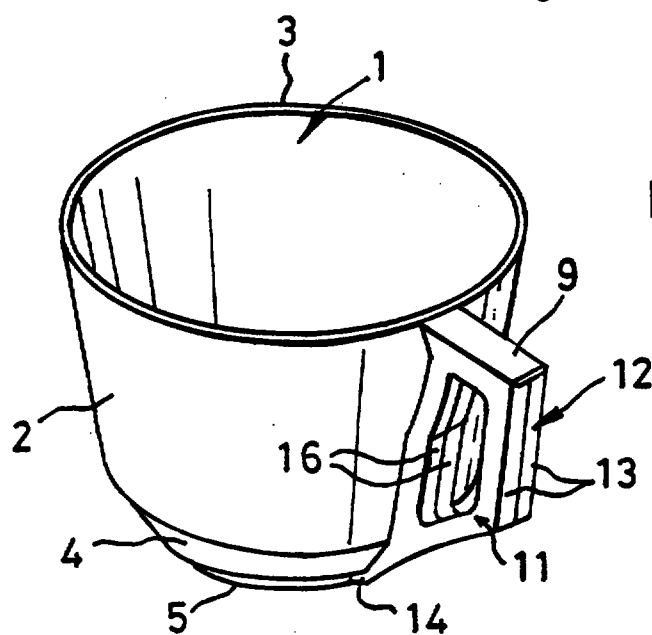

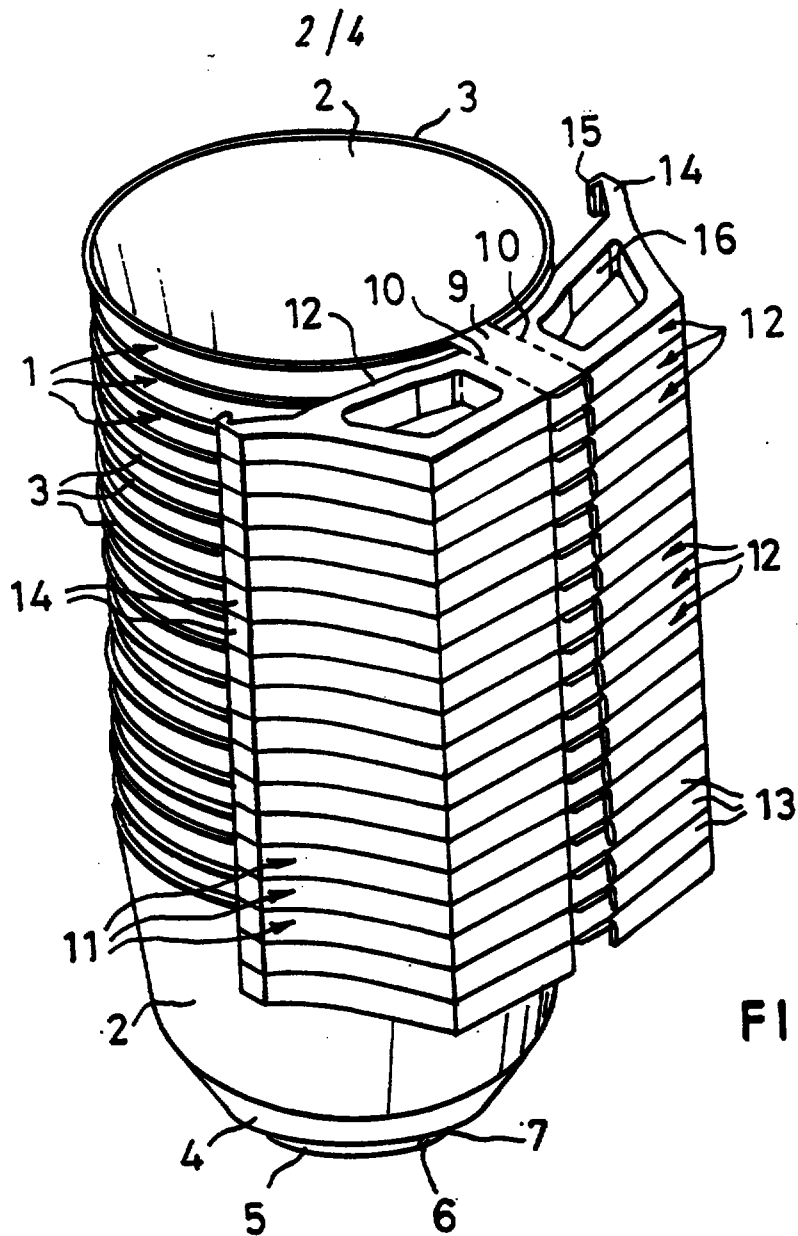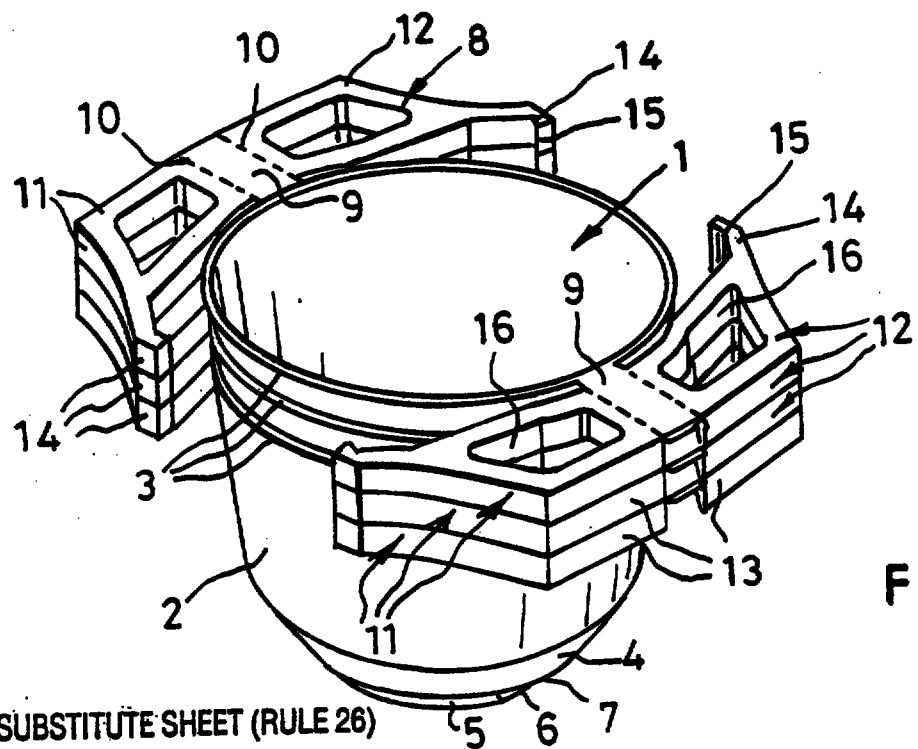

3/4

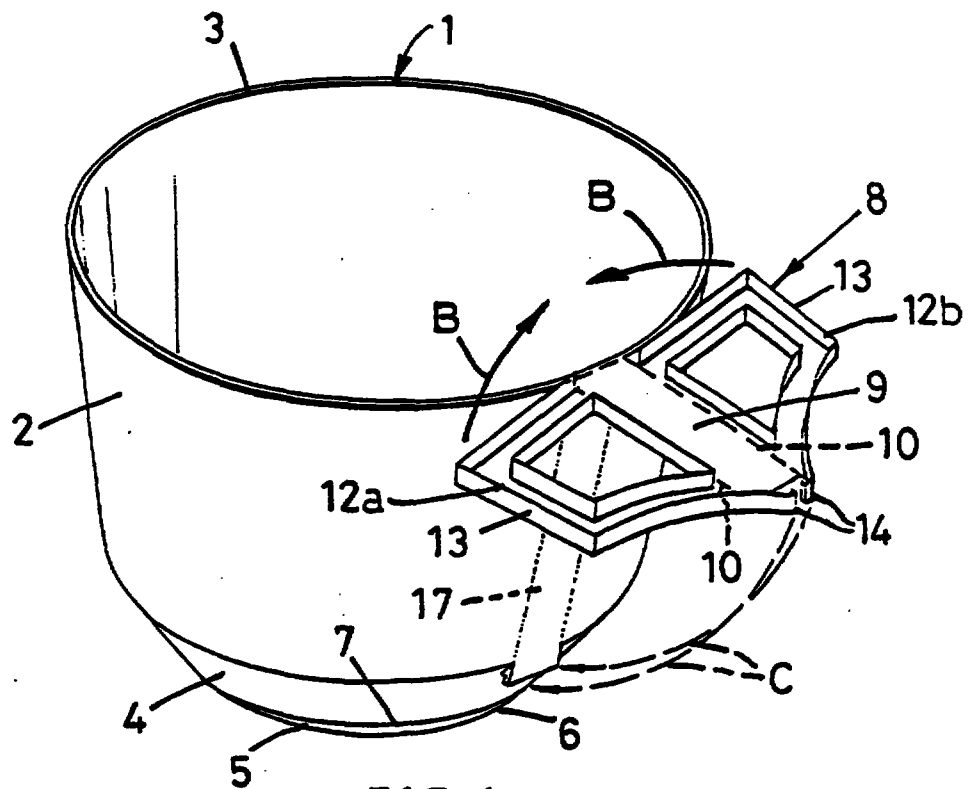


FIG. 6

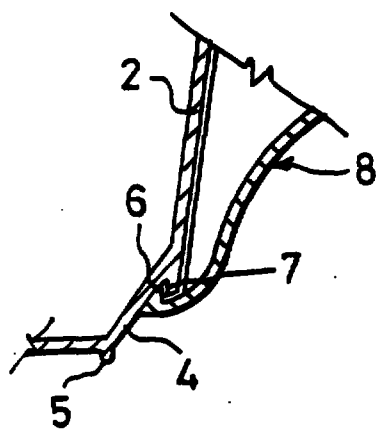


FIG. 7

4/4

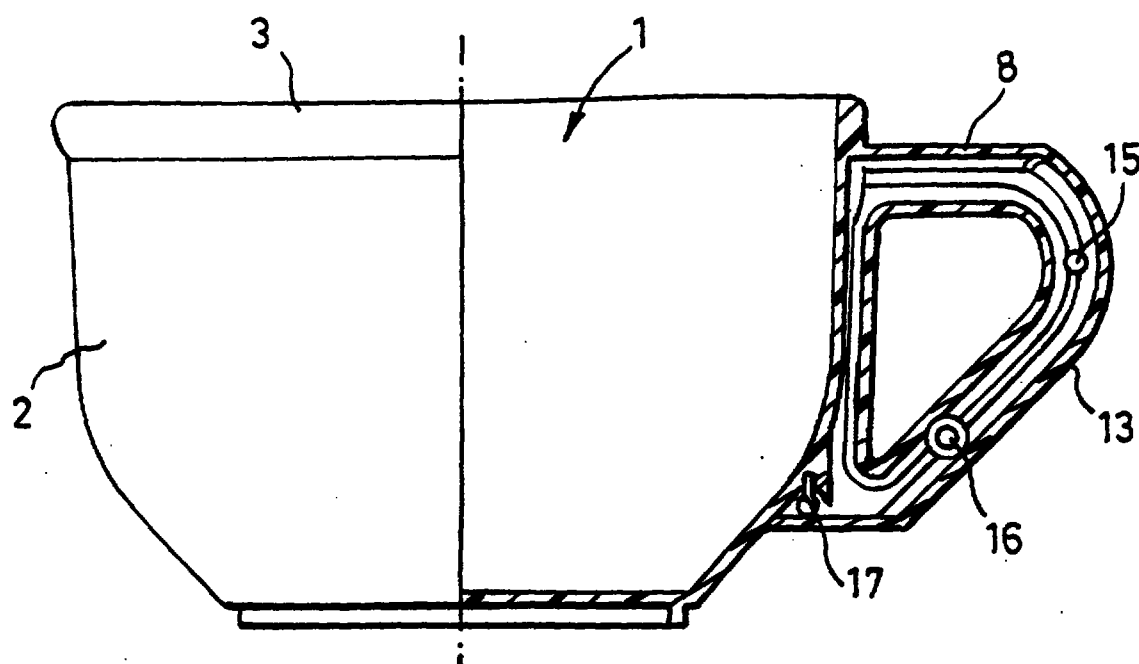


FIG. 8

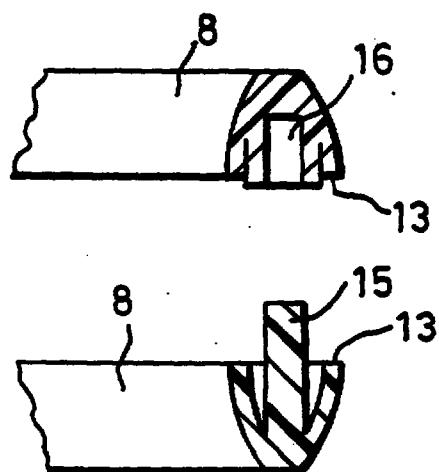


FIG. 9a

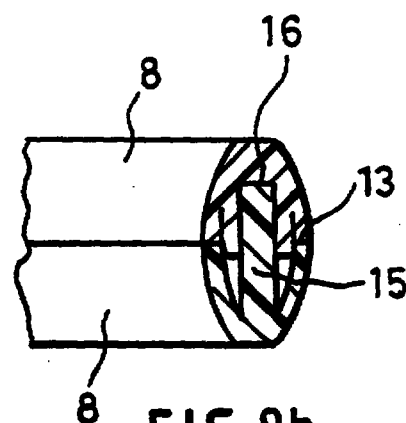


FIG. 9b

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

RTMP'S COPY



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁶ : A47G 19/23		A1	(11) International Publication Number: WO 96/03906
			(43) International Publication Date: 15 February 1996 (15.02.96)
(21) International Application Number: PCT/GB95/01813		(81) Designated States: AM, AU, BB, BG, BR, BY, CA, CN, CZ, EE, FI, GB, GE, HU, IS, JP, KG, KP, KR, KZ, LK, LR, LT, LV, MD, MG, MN, MX, NO, NZ, PL, RO, RU, <u>SG</u> , SI, SK, TJ, TM, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(22) International Filing Date: 31 July 1995 (95.07.31)			
(30) Priority Data: 9415545.4 2 August 1994 (94.08.02) GB 9509860.4 16 May 1995 (95.05.16) GB			
(71)(72) Applicants and Inventors: KENNETT, William, Beverley [GB/GB]; The Steadings, Lundin Road, Crossford, Dunfermline, Fife KY12 8QP (GB). WELSFORD, Peter, Anthony [GB/GB]; Flat 10, 3 Culford Gardens, London SW3 2SX (GB).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(74) Agent: GODDARD, George, William, John; Hughes Clark & Co., 114/118 Southampton Row, London WC1B 5AA (GB).			

SG 9700611-8

(54) Title: FOOD OR DRINK CONTAINER

(57) Abstract

A food or drink container more particularly with an integrally formed handle or handles which can be assembled from a stacking position to a position of use is described. In one construction the container (1) comprises a cup-shaped part (2) which tapers from an upper rim (3) to a cone or round shaped base (4) terminating in a base rim (5) with a cutaway portion (6) forming an angled edge (7). Extending radially from the upper rim (3) is a winged projection (8) the centre part (9) of which is horizontal to the upper rim. Two fold lines (10) are formed in the part (9) to facilitate the folding of two wings (12a, 12b) downwards as shown by arrows "A". The edge walls (13) of the wings (12a, 12b) engage and abut each other in their fully folded down position to form a resilient handle.

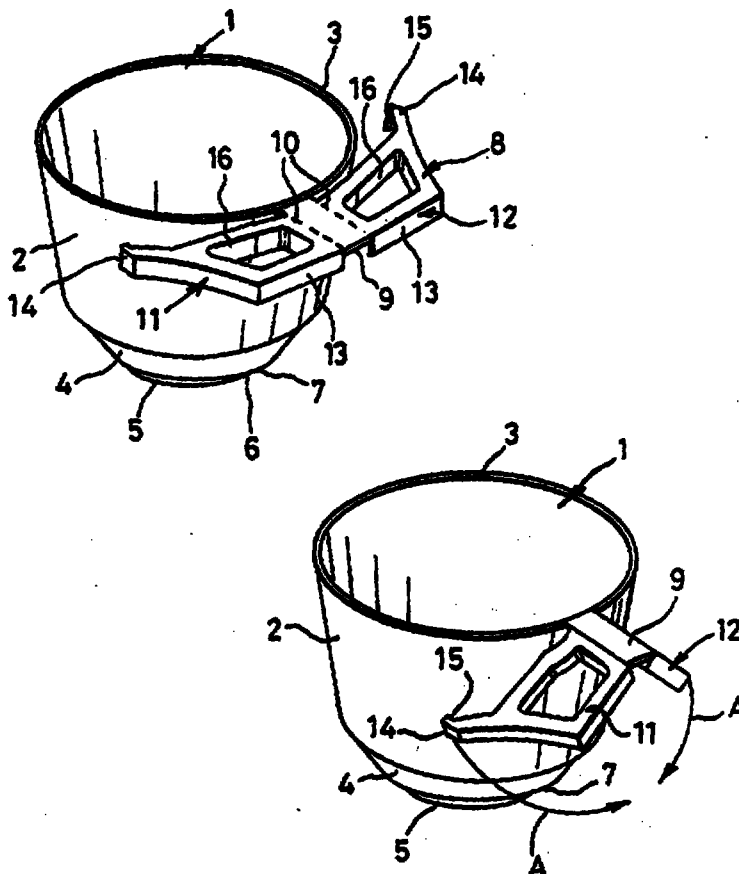

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

9700611-8

FOOD OR DRINK CONTAINER

This invention relates to a food or drink container and more particularly to a container with an integrally formed handle or handles which can be assembled from a stacking position to a position of use.

5 Stackable one-piece containers with an integrally formed handle are known, but these are relatively complex in their construction and their method of assembly and have the disadvantage that the handle may be unstable when the container is filled with hot food or drink.

One such container in the form of a drinking cup is described in U.S.
10 specification No. 2937783 (Press et al) comprising a bowl, a radially projecting handle integrally formed on the outside upper edge of the bowl, an inwardly embossed and upwardly extending rib in the bowl wall, the handle and rib rigidifying the bowl in the handle area. A groove is provided on the outside of the bowl below the handle and a pair
15 of integrally formed projecting ears on opposite sides of the handle which fold downwards to the handle along fold lines such that the outer ends of the ears snap into grooves positioning them to provide a handle supporting the bowl.

An aim of the present invention is to provide an improved food or drink container which overcomes the above disadvantages.

According to the present invention there is provided a food or drink container
20 comprising a cup-shaped part formed with integral winged projections which can be folded from a stacking position for the container into a handle to hold and support the cup-shaped part, wherein the winged projections are hinged to mate and form a hollow tube section having means to lock the free end of the handle to the cup-shaped part to simulate a conventional handle with an aperture for the finger and thumb of the user.

25 Preferably, the container is made from a plastics material by an injection moulding process.

Conveniently, the winged projection extends radially from the rim of the cup-shaped part to facilitate nesting of a plurality of the containers.

In an alternative construction the cup-shaped part has two winged projections
30 extending radially from opposite sides of the rim of the cup-shaped parts.

This is the replacement sheet


Date: 10 MAR 1997

AMENDED SHEET

1a

The means to lock the handle is preferably an angle-shaped part with a series of parallel lateral grooves which clip onto a shoulder of the base of the cup-shaped part of the container.

Conveniently the hollow tube section has a

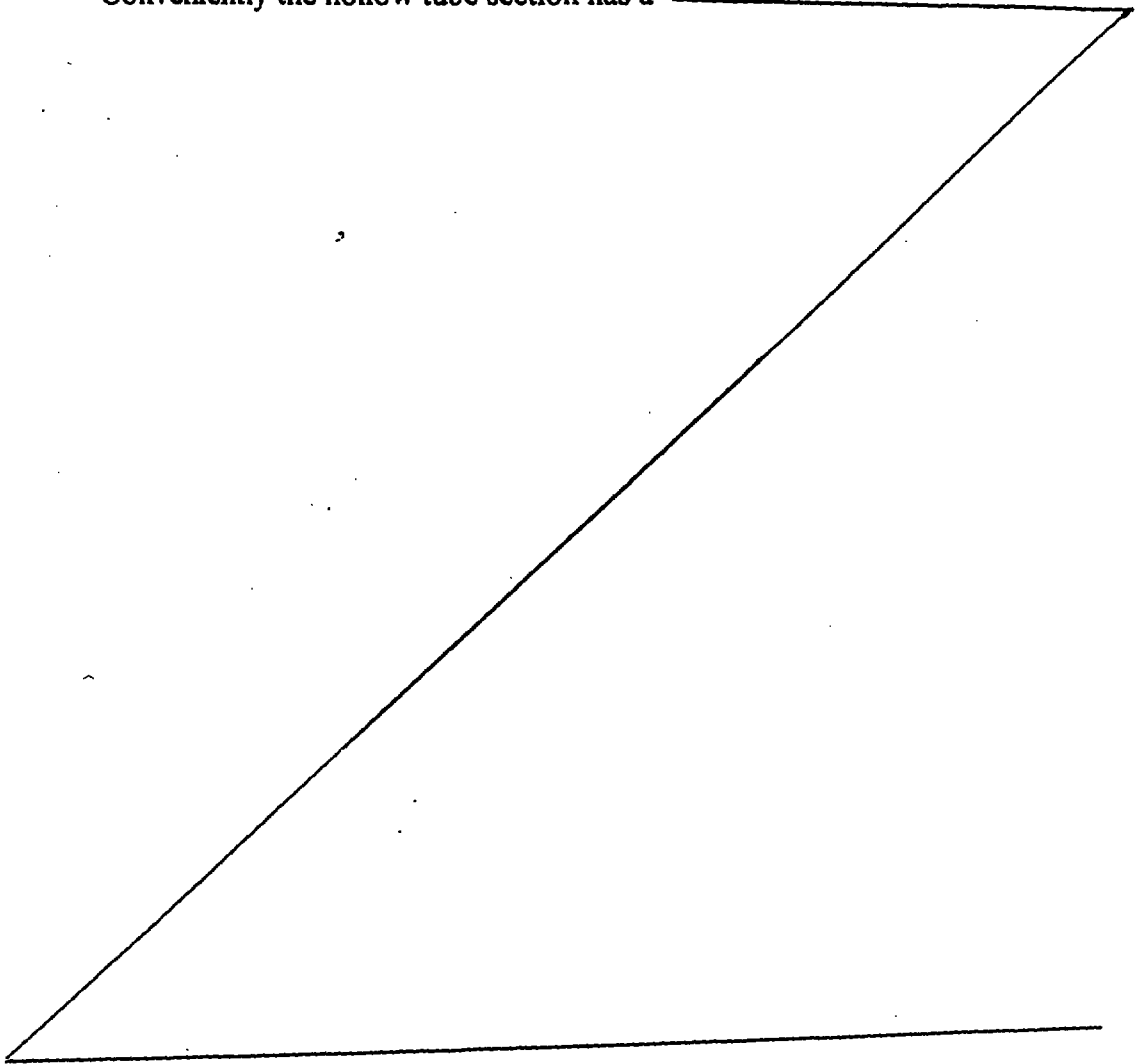

This is the replacement sheet

Date: 10 MAR 1997

AMENDED SHEET

rectangular, round oval or octagonal cross-section.

Preferably, the winged projections have locking means to secure the winged projections together.

In a preferred construction the locking means is a
5 pin on one winged projection engaging a hole in the other winged projection.

Embodiments of the stackable container will now be described by way of example only, with reference to the accompanying drawings, in which:

10 Fig. 1 is a perspective view of a first embodiment of a container with a single winged projection in the horizontal position, for stacking;

Fig. 2 is a similar view of the container to Fig. 1 with the winged projection folded downwards in the
15 direction of the arrows;

Fig. 3 is a perspective view of the container of Figs. 1 and 2 with the winged projection folded to form a handle;

Fig. 4 is a perspective view of a stack of nested
20 containers, according to the invention, each container having a single handle;

Fig. 5 is a perspective view of a stack of three nested containers each having two handles.

Fig. 6 is a perspective view of a second embodiment
25 of a container with winged projections to be folded upwards;

Fig. 7 is a fragmentary section of the container of Fig. 6 with the handle formed by the winged projections secured to the base of the container;

30 Fig. 8 is a side elevation of a modified container with locking means for the winged halves of the handle; and

Fig. 9a is a sectional detail of the locking means in the unlocked position while Fig. 9b is a sectional
35 detail of the locking means in the locked position.

The container may be used e.g. as a cup for

This is the replacement sheet

Date: 10 MAR 1997

AMENDED SHEET

2/2/96

Date: 10 MAR 1997

containing drinks or as a bowl for hot food such as soup or rice.

Each container 1 has a cup-shaped part 2 which tapers from an upper rim 3 to a cone or round shaped base 4 terminating in a base rim 5 with a cutaway portion 6 forming an angled edge 7.

5 Extending radially from the upper rim 3 is a handle 8 with winged projections 11 and 12 adjoining a centre part 9 of which is horizontal to the upper rim. Two fold lines 10 are formed in the part 9 to facilitate the folding of the two wings 12a and 12b downwards as shown by the arrows A in Fig. 2.

10 The edge walls 13 of the winged projections 11 and 12 engaged and abut each other in their fully folded down position to form a resilient handle as shown in Fig. 3.

15 The free ends of the two winged projections 11 and 12 have angle shaped abutments 14 with transverse grooves 15 on their inner edges, which in the assembled handle engage an angled surface 7 formed by the base of cup 2. The engagement of the abutments 14 with the angled surface 7 locks the handle to the lower edge of the cup 2 to form a stable handle for the container.

As shown in Fig. 4 a plurality of containers 1 are nested in a stack to reduce their volume when stored for transport such as in aircraft or when located in a drink or food dispensing machine. The containers 1 nest closely with the handle 8 lying flush with the handle of an adjacent container.

20 Fig. 5 is a similar stack of three nested containers 1 each having two handle 8 extending radially from opposite sides of the upper rim 3 of the cup 2.

25 In the preferred construction the handle winged projections 11 and 12 are each moulded with walls 16 which form a hollow tubular section with a shaped aperture simulating that of a conventional cup handle. However, it will be understood that this may take the form of a rectangular, round, oval or octagonal cross-section. It is also possible to leave out the inner wall of the wing so that the handle is similar to a conventional loop handle.

30 The winged projection is formed integrally with the side of the cup or bowl but its strength does not rely on the distortion of the material but on the cantilever principle achieved by the lock formed between the parts 14 and 7.

Although the winged projections 11 and 12 are connected to the centre part 9 by the fold lines they form a permanent integral part of the container. When rotated through

90° the winged projections are sufficiently stable to allow torsion to exert pressure in an over centre clip at the cup base which is integral with the cup. By using the base clip, if the container is used with a hot liquid, the wings of the handle remain locked unless deliberate force is applied to unclip the base lock. The base attachment clip of the handle
 5 also provides an applied extension of the base of the container improving the stability of the cup by moving the centre of gravity to compensate for the weight of the handle.

In a second embodiment of the container shown in Figs. 6 and 7, like parts have the same reference numerals as in the embodiment of Figs. 1 to 3.

In this second embodiment the winged projections 12a and 12b lie in a plane
 10 level with the upper rim 3 of the cup-shaped part 2. The winged projections are assembled into a handle 8 by folding them along the fold lines 10 of the centre part 9 in an upward direction as shown by the arrows B. The assembled handle winged projections are pivoted downwards as shown by the dotted arrows C so that the centre part 9 engages the cup-shaped wall at 17 and the angle-shaped abutments 14 clip onto the angled edge 7
 15 locking the winged projections 12a and 12b together forming a stable handle to support the cup-shaped part 2 and its contents.

In a third embodiment of the container 1 the winged projections of the handle 8 are folded downwards so that their edge walls 13 engage and the winged projections are held together by locking means in the form of a pin 15 on one projection engaging a hole
 20 16 formed in the other projection. Each winged projection may have a pin 15 and hole 16 as shown in Fig. 8. Figs. 9a and 9b show the locking means in the open and locked positions, respectively. The pin and hole engage each other with an interference fit to provide a resilient locking of the two winged projections.

The free ends of the winged projections each have a keyway 17 introduced into
 25 the base pin. This keyway 17 is modified to suit and carry a key detail providing a secure locking of the free ends of the winged projections to the base of the cup container 2.

The container of the present invention enables the stacking of the containers to conserve space and for ease of transport, reducing the space by a ratio of at least one in ten.

30 The moulded container is 49 to 50% lighter than conventional plastic cups at present used by airlines. As an example in the case of drinking cups used on Concorde

This is the replacement sheet

Date: 10 MAR 1997

AMENDED SHEET

where china cups are used, the weight reduction would be from 275 grams down to 15 grams equivalent per cup.

5 The containers can be manufactured by an injection moulding process which eliminates the conventional core moulding tool used at present in the making of plastic cups for airlines to reduce significantly the overall cost. Multiple impressions can be achieved simultaneously on one pair of matching die faces and thus produce them more efficiently and economically. The finished product can of course be made of white or multi-coloured plastics material with a shiny or matt surface and can be 'clinically' clean when delivered.

10

This is the replacement sheet

Date: 10 MAR 1997

AMENDED SHEET

CLAIMS:

1. A food or drink container (1) comprising a cup-shaped part (2) formed with integral winged projections (11, 12, 12a, 12b) which can be folded from a stacking position for the container into a handle (8) to hold and support the cup-shaped part (2),
 5 characterised in the winged projections (11, 12, 12a, 12b) are hinged to mate and form a hollow tube section having means to lock the free end of the handle (8) to the cup-shaped part (2) to simulate a conventional handle with an aperture for the finger and thumb of the user.
2. A container (1) as claimed in Claim 1, characterised in the hollow tube section
 10 has rectangular, round, oval or octagonal cross-section.
3. A container (1) as claimed in Claim 1, characterised in that the container (1) is made from a plastics material by an injection moulding process.
4. A container (1) as claimed in any preceding claim, characterised in that the winged projections (11, 12, 12a, 12b) extend radially from the rim (3) of the cup-shaped
 15 part (2) to facilitate nesting of a plurality of the containers.
5. A container (1) as claimed in any preceding claim, characterised in that the cup-shaped part (2) has two winged projections (11, 12, 12a, 12b) extending radially from opposite sides of the rim (3) of the cup-shaped part (2).
6. A container (1) as claim in any preceding claim, characterised in that the means
 20 to lock the handle (8) is an angle-shaped part (14) with a series of parallel lateral grooves (15) which clip onto a shoulder (7) of the base of the cup-shaped part (2) of the container (1).
7. A container (1) as claimed in any preceding claim, characterised in that the winged projections (11, 12, 12a, 12b) of the handle are swung downwards to form the
 25 handle (8).
8. A container (1) as claimed in any of Claims 1 to 6, characterised in that the winged projections (11, 12, 12a, 12b) of the handle are swung upwards to form the handle (8).
9. A container (1) as claimed in any preceding claim, characterised in that the
 30 winged projections (11, 12, 12a, 12b) have locking means to secure the winged projections (11, 12, 12a, 12b) together.

This is the replacement sheet



Date: 10 MAR 1997

10. A container (1) as claimed in Claim 9, characterised in that the locking means are a pin (15) on one winged projection (12a) engaging a hole (16) in the other winged projection (12b).

5

This is the replacement sheet

Date: 10 MAR 1997

Authorised sign



* C L M S *