

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
8 March 2001 (08.03.2001)

PCT

(10) International Publication Number
WO 01/17081 A1

- (51) International Patent Classification⁷: **H02B 1/052**
- (21) International Application Number: **PCT/IB00/01207**
- (22) International Filing Date: 29 August 2000 (29.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/385,611 30 August 1999 (30.08.1999) US
- (71) Applicant: **EATON CORPORATION** [US/US]; Eaton Center, 111 Superior Avenue, Cleveland, OH 44114 (US).
- (72) Inventors: **SPANGLER, Michael, J.**; 151 Oakdale Drive, Zelienople, PA 16063 (US). **DEGRAZIA, Dean, B.**; Apt. E, 724 Roselawn Avenue, Pittsburgh, PA 15228 (US). **FUNK, Gary, R.**; 356 Nature Trail Lane, Murrysville, PA 15618 (US). **HELMS, Roger, W.**; 48 St. Andrews Drive, Beaver Falls, PA 15010 (US). **TURNER, David, C.**; 6750 Elk Rush Drive, Imperial, PA 15126 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **CIRCUIT INTERRUPTER WITH IMPROVED DIN RAIL MOUNTING ADAPTOR**

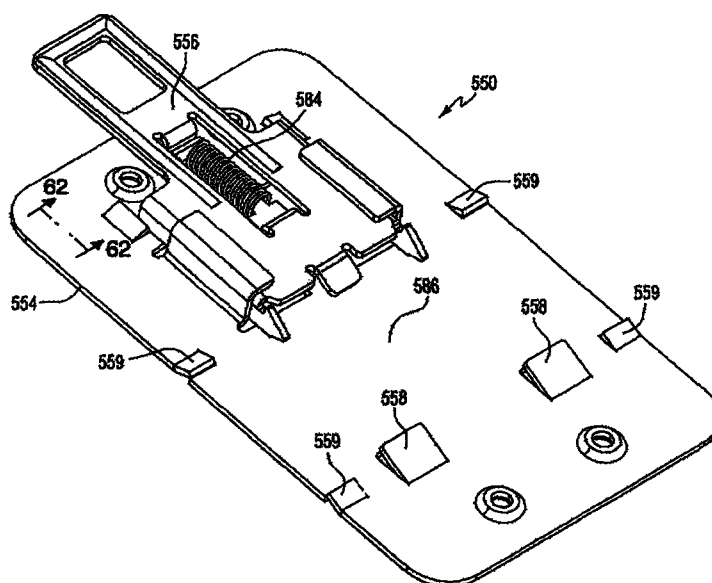

(57) Abstract: A DIN rail adapter for a circuit interrupter including a backplate having two guide members and two substantially planar stabilizing tabs. The backplate further includes a first spring attachment region. A slider is slideably disposed between the guide members and the stabilizing tabs, and includes a second spring attachment region. A spring is disposed between the first and second spring attachment regions for biasing the slider in a first direction.

WO 01/17081 A1