



(51) International Patent Classification:
A44B 11/25 (2006.01) *A62B 35/00* (2006.01)

(21) International Application Number:
PCT/US2010/026287

(22) International Filing Date:
5 March 2010 (05.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/414,364 30 March 2009 (30.03.2009) US

(71) Applicant (for all designated States except US): **D B INDUSTRIES, INC.** [US/US]; 3833 Sala Way, Red Wing, MN 55066-5005 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JOHNSON, Andrew, P.** [US/US]; 300 E. 4th Street, St. Paul, MN 55101 (US). **BLACKFORD, Matthew, J.** [US/US]; 739 Melville Circle, Hastings, MN 55033 (US).

(74) Agent: **MAU, Michael, L.**; IPLM Group, P.A., Post Office Box 18455, Minneapolis, MN 55418 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,

[Continued on next page]

(54) Title: BUCKLE

(57) Abstract: A buckle and catch used to couple webbing together is provided. The buckle includes a connecting portion, a slide and locking member. The connecting portion is configured to selectively engage an engaging portion of a first webbing. The slide of the buckle is configured to engage a second webbing and the locking member is configured to selectively press the second webbing on the slide.

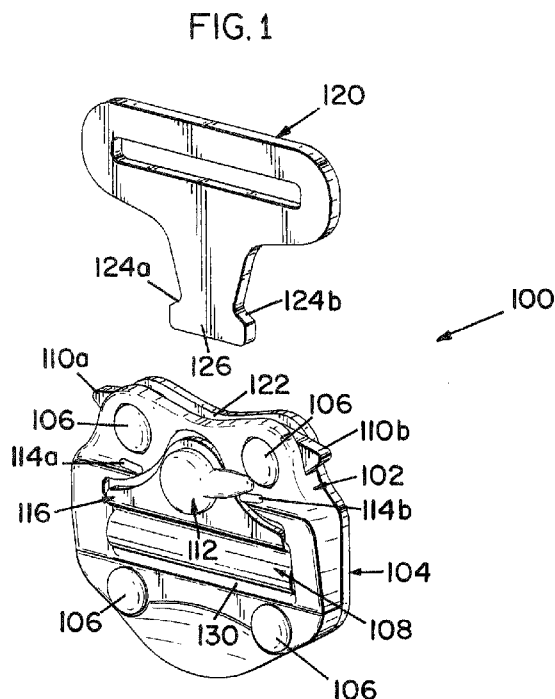



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, **Published:**
ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*