

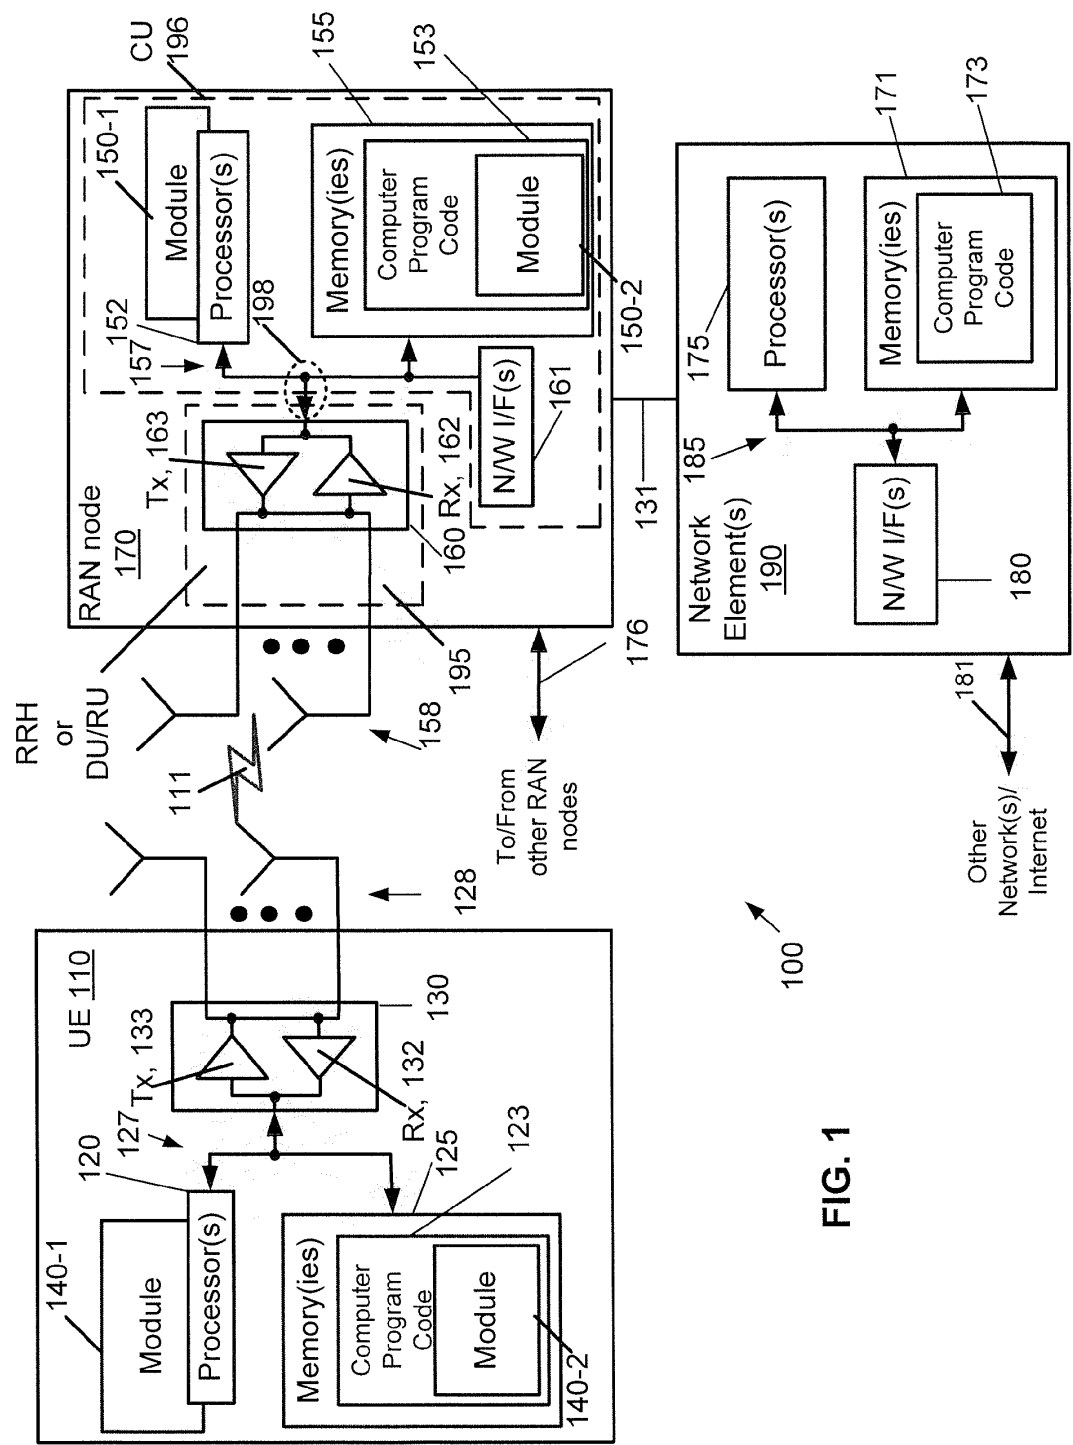


FIG. 1

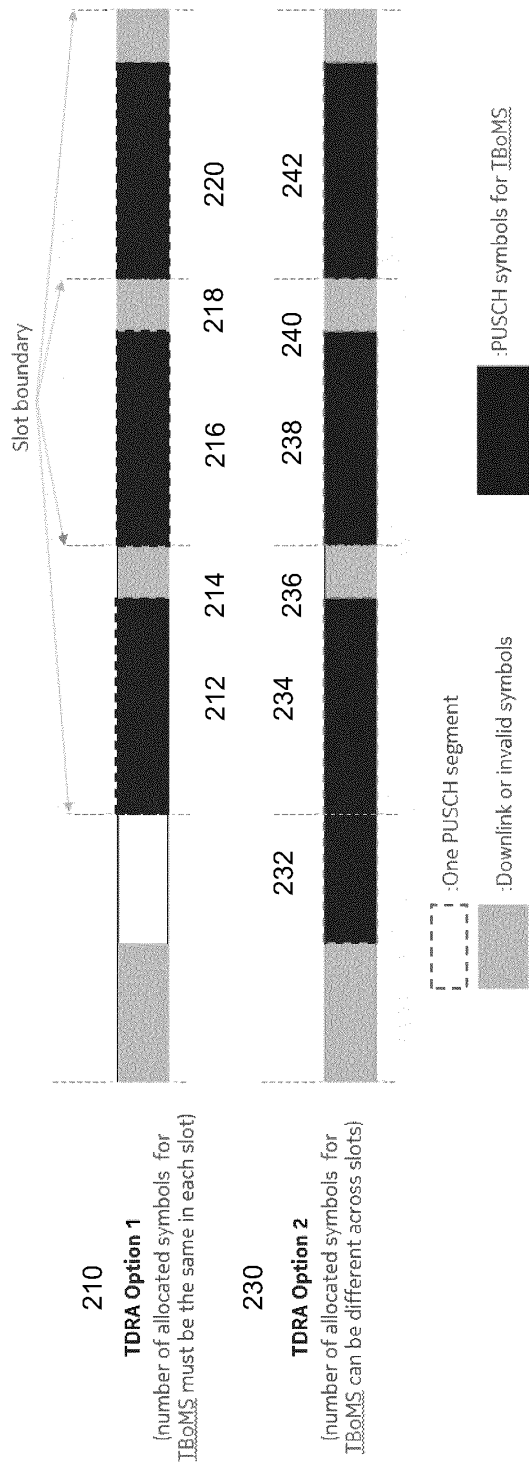


FIG. 2

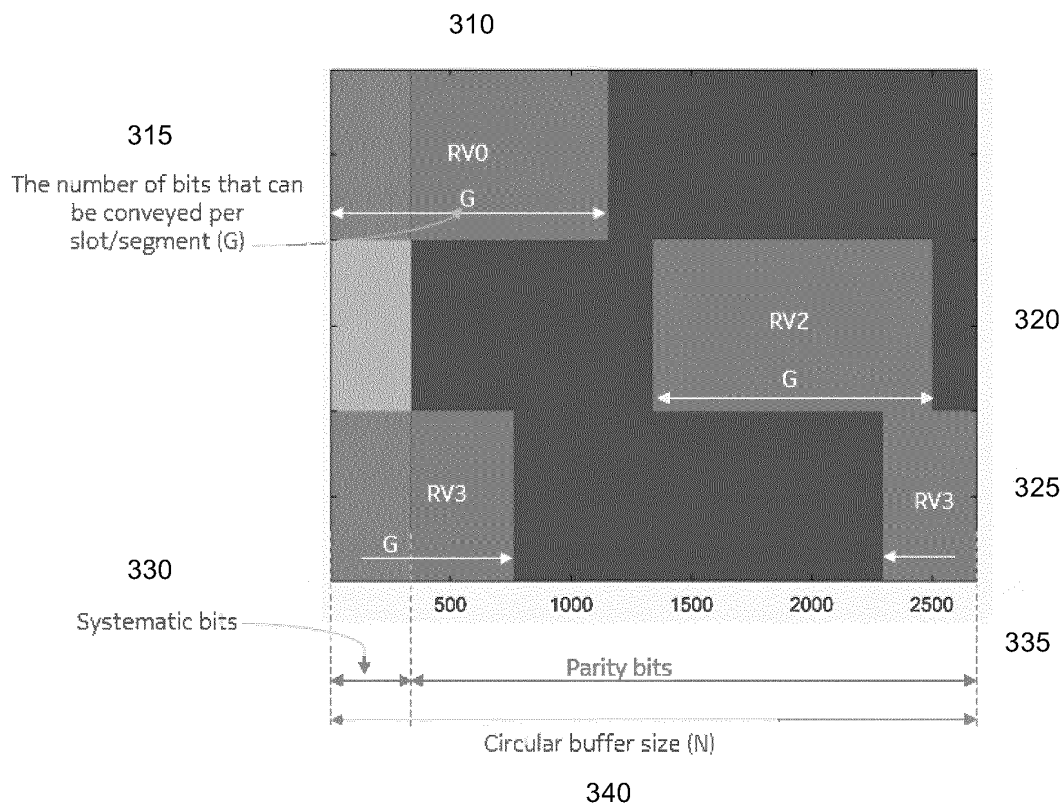


FIG. 3

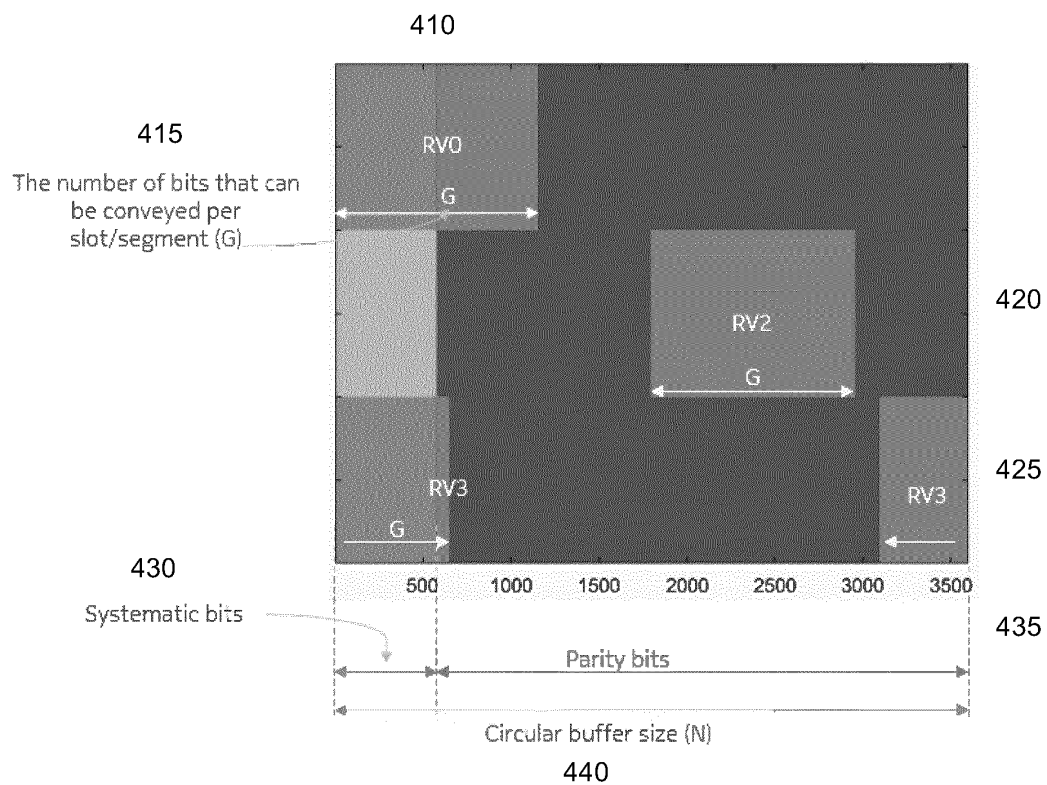


FIG. 4

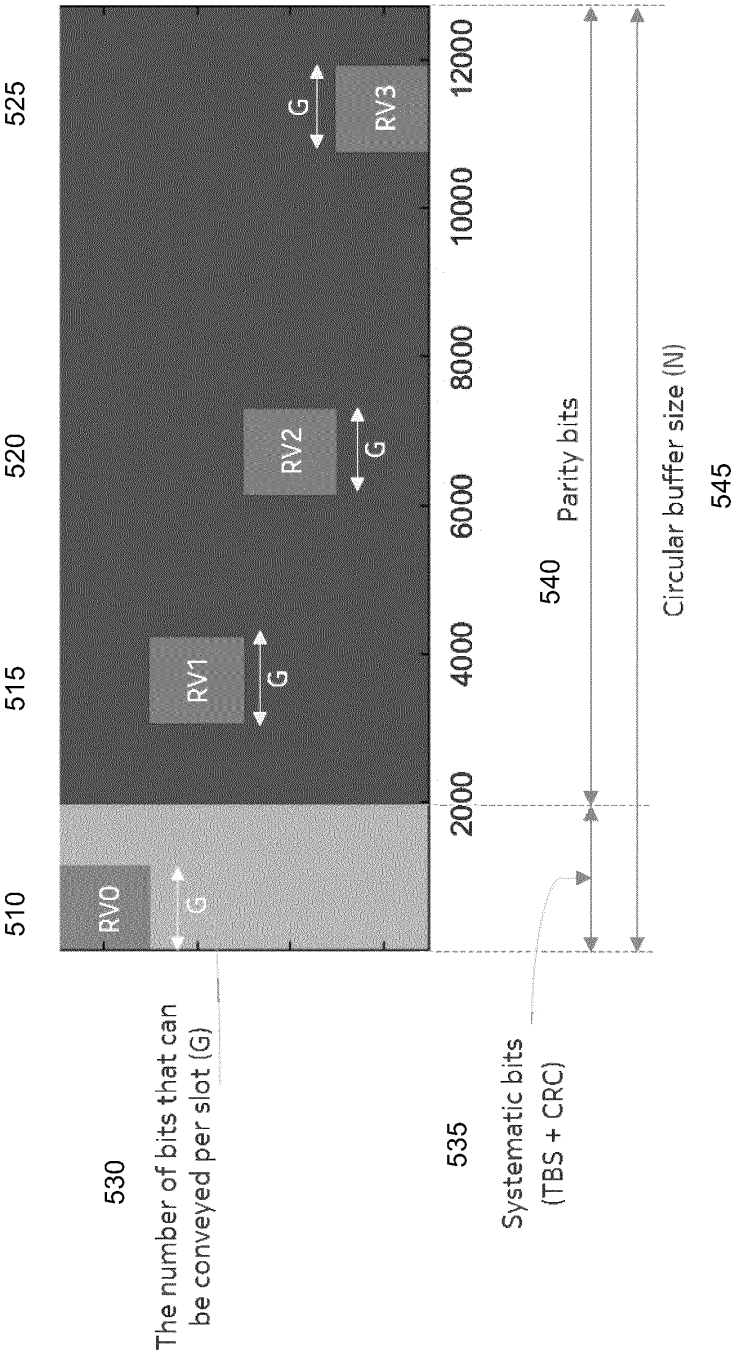


FIG. 5

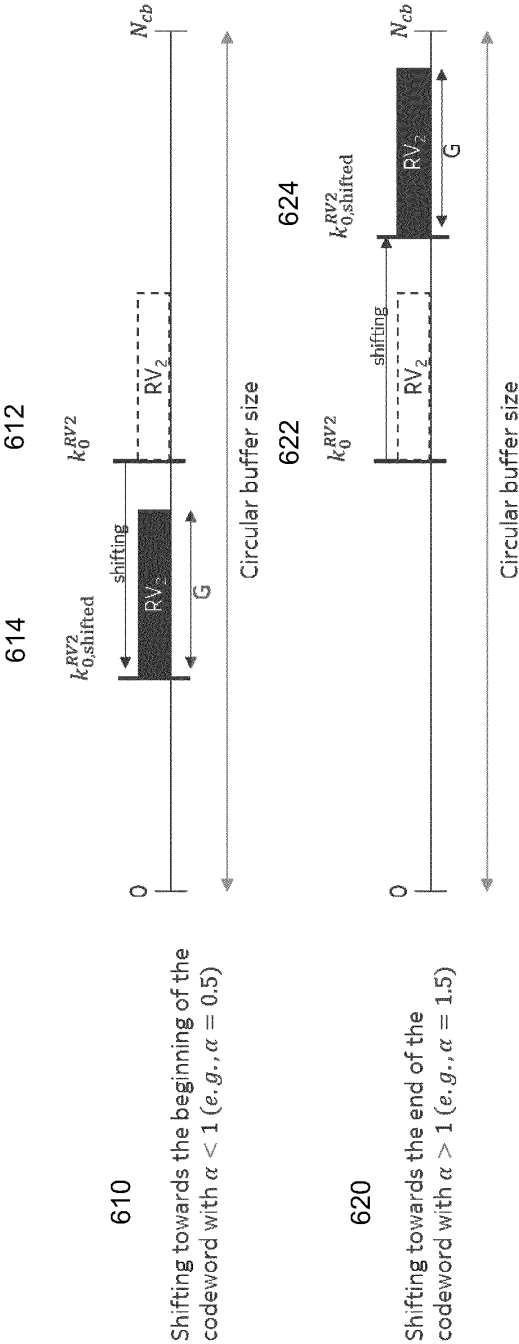


FIG. 6

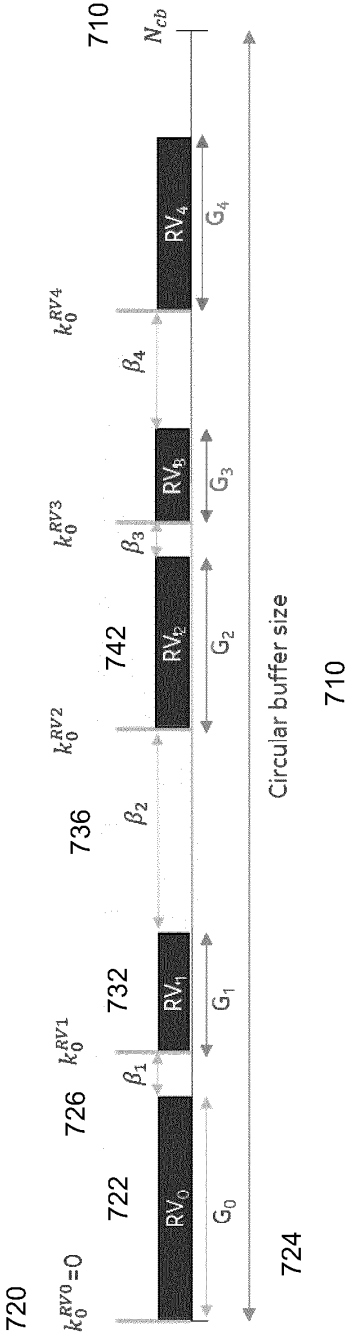


FIG. 7

800

Determine a starting position of at least one redundancy version of a transport block in a circular buffer based, at least partially, on a position of another redundancy version of the transport block in the circular buffer

810



Transmit one or more of the other redundancy version and/or the at least one redundancy version using the determined starting position of the at least one redundancy version of the transport block

820

FIG. 8

900

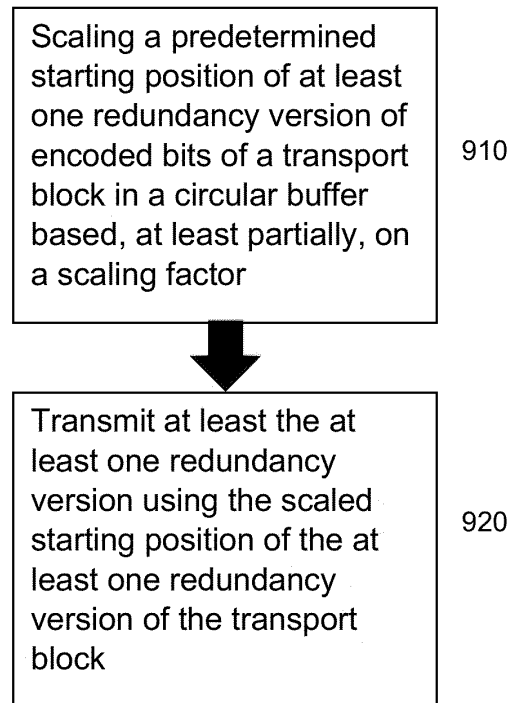


FIG. 9

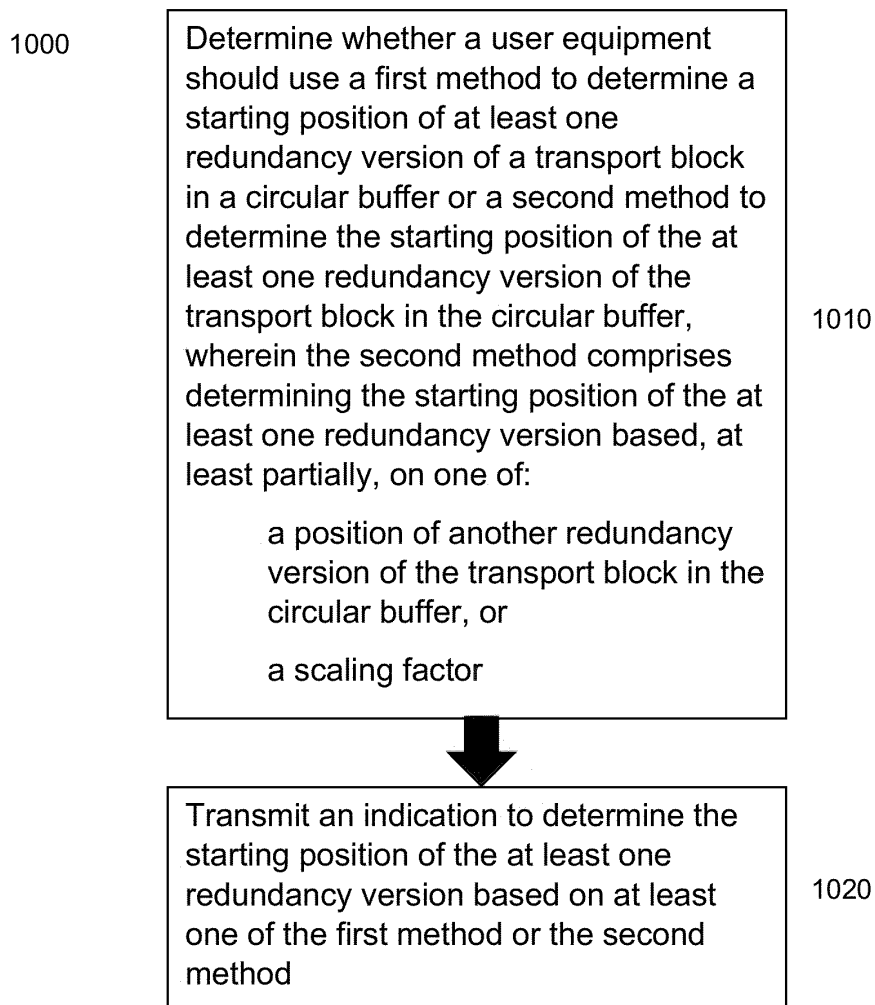


FIG. 10