



(43) International Publication Date
16 May 2013 (16.05.2013)

- (51) International Patent Classification:
B29C 63/34 (2006.01) *F16L 55/165* (2006.01)
- (21) International Application Number:
PCT/EP2012/072292
- (22) International Filing Date:
9 November 2012 (09.11.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20116119 11 November 2011 (11.11.2011) FI
20125106 1 February 2012 (01.02.2012) FI
- (71) Applicant: **UPONOR INNOVATION AB** [SE/SE];
Virso Industriområde, S-73061 Virso (SE).
- (72) Inventors: **ÄNÄS, Tommy**; c/o Uponor Innovation AB,
Virso Industriområde, S-73061 Virso (SE). **LAAKSO,
Anna-Marja**; c/o Uponor Innovation AB, Virso Industri-
område, S-73061 Virso (SE).
- (74) Agent: **KOLSTER OY AB**; Ossi Huhtanen, Iso Roob-
ertinkatu 23, P.O.Box 148, FI-00121 Helsinki (FI).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

(54) Title: METHOD FOR LINING EXISTING PIPE ON INSIDE AND INNER LINING PIPE

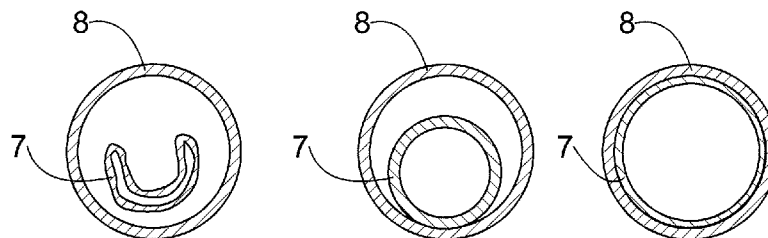


FIG. 3

FIG. 4

FIG. 5

(57) Abstract: Disclosed is a method for lining an existing pipe on the inside, and to an inner lining pipe. The inner lining pipe (7) with a certain original outer dimension is made mainly of polyvinyl chloride. Said original outer dimension is smaller than the inner circumference of the existing pipe (8) to be lined. The inner lining pipe (7) is installed inside the pipe (8) to be lined. After this, the inner lining pipe (7) is expanded in such a manner that its original outer dimension becomes larger by causing a radial orientation in the wall material of the inner lining pipe (7).