

1 / 13

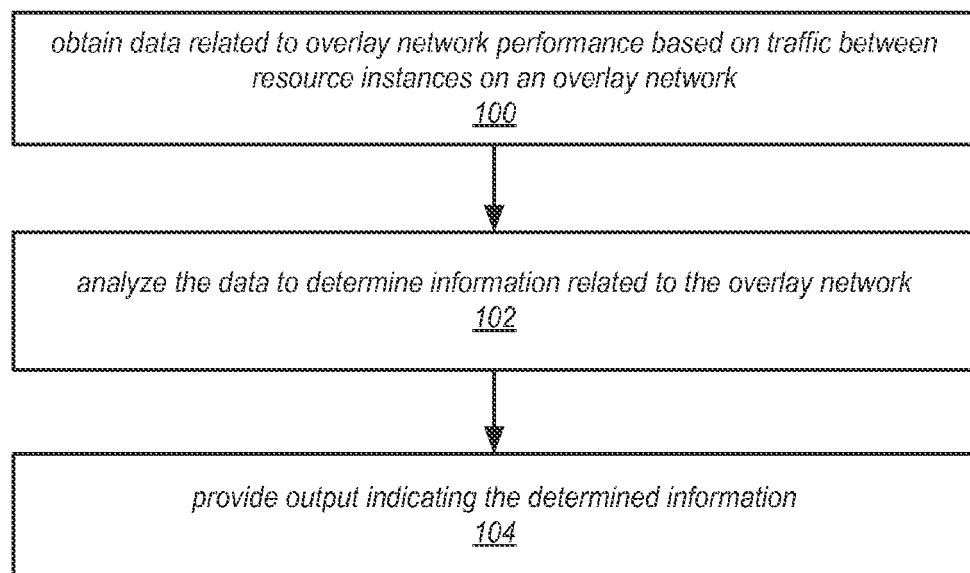


FIG. 1

2 / 13

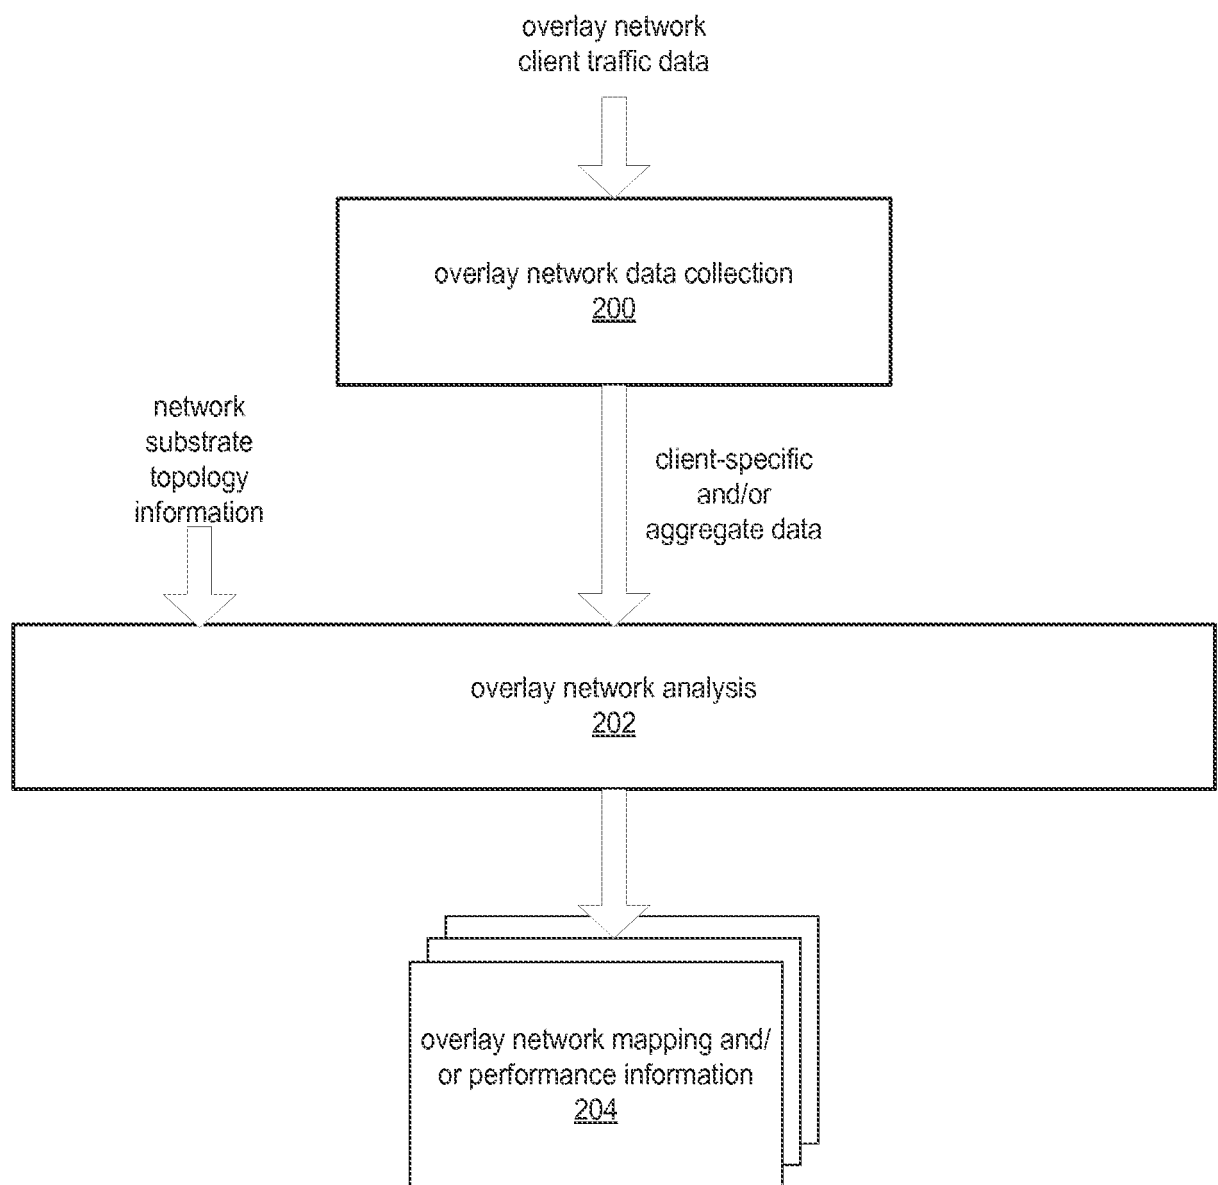


FIG. 2

3 / 13

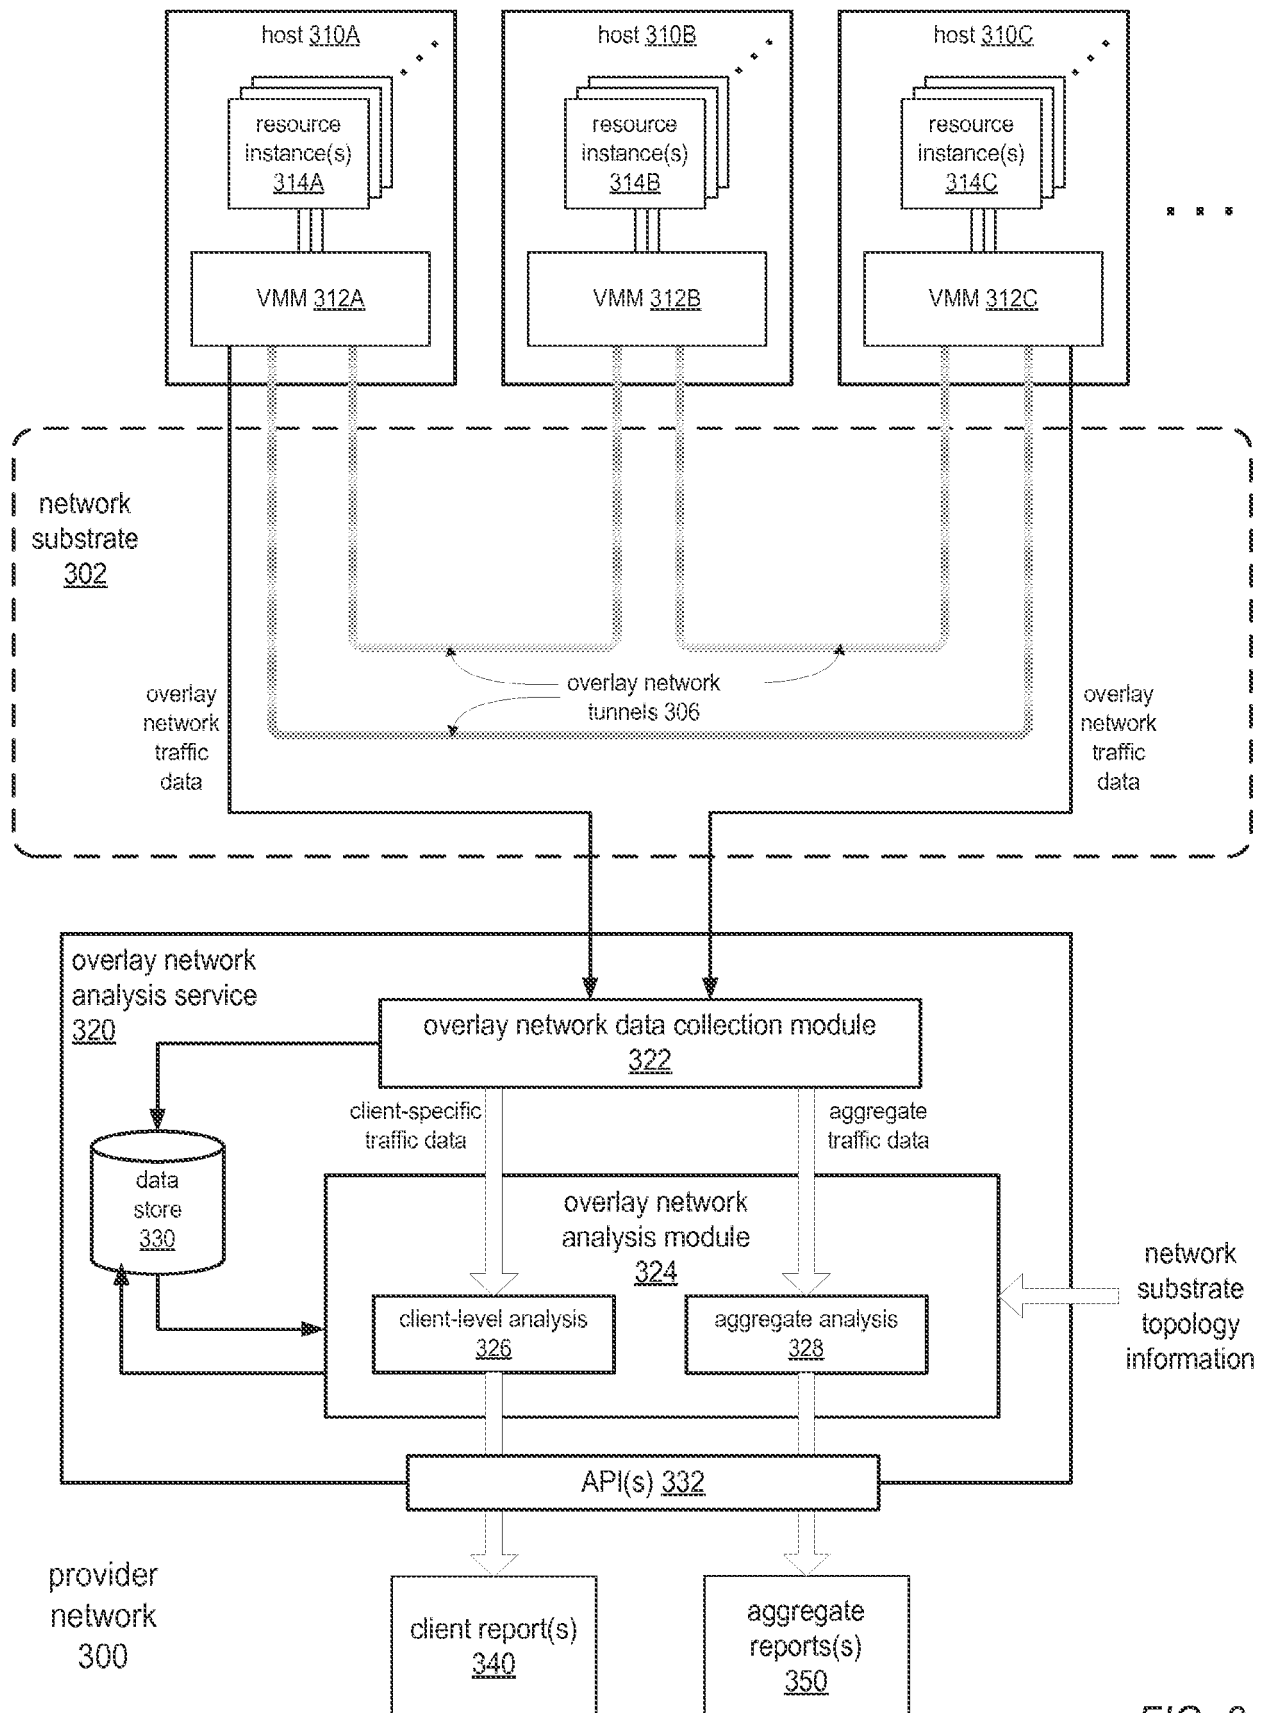


FIG. 3

4 / 13

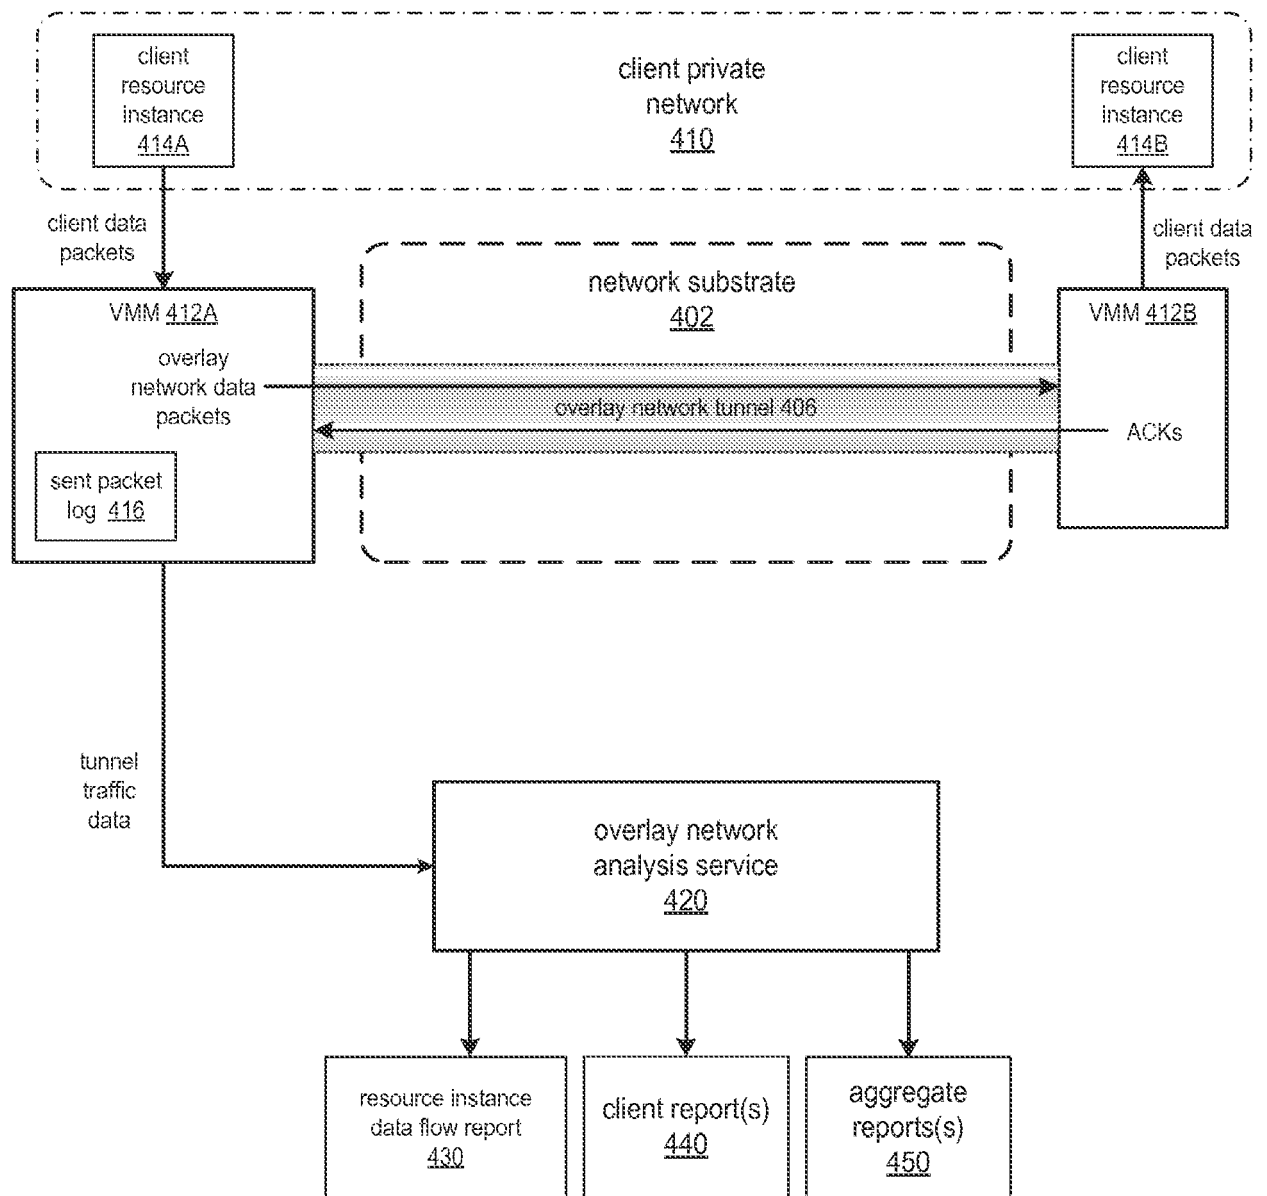


FIG. 4

5 / 13

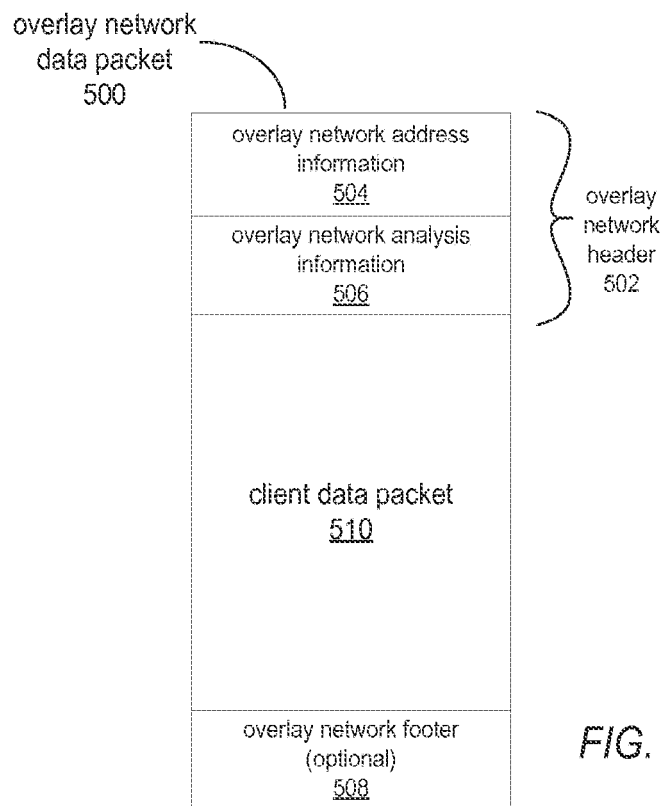


FIG. 5A

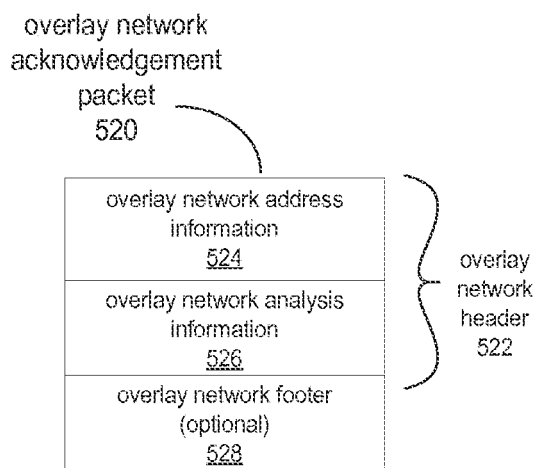


FIG. 5B

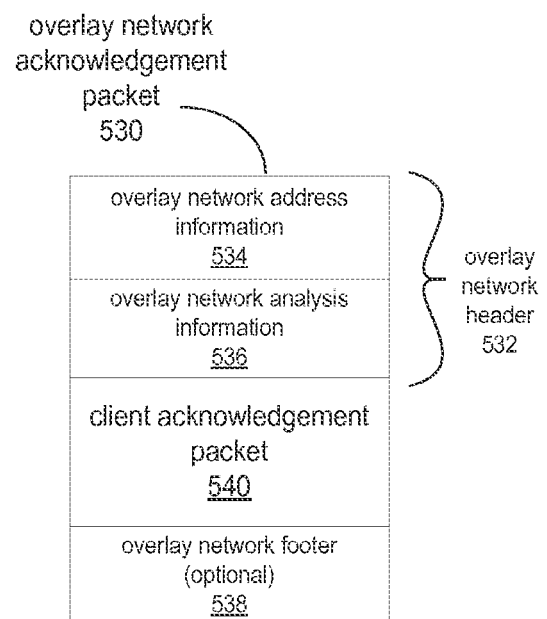


FIG. 5C

6 / 13

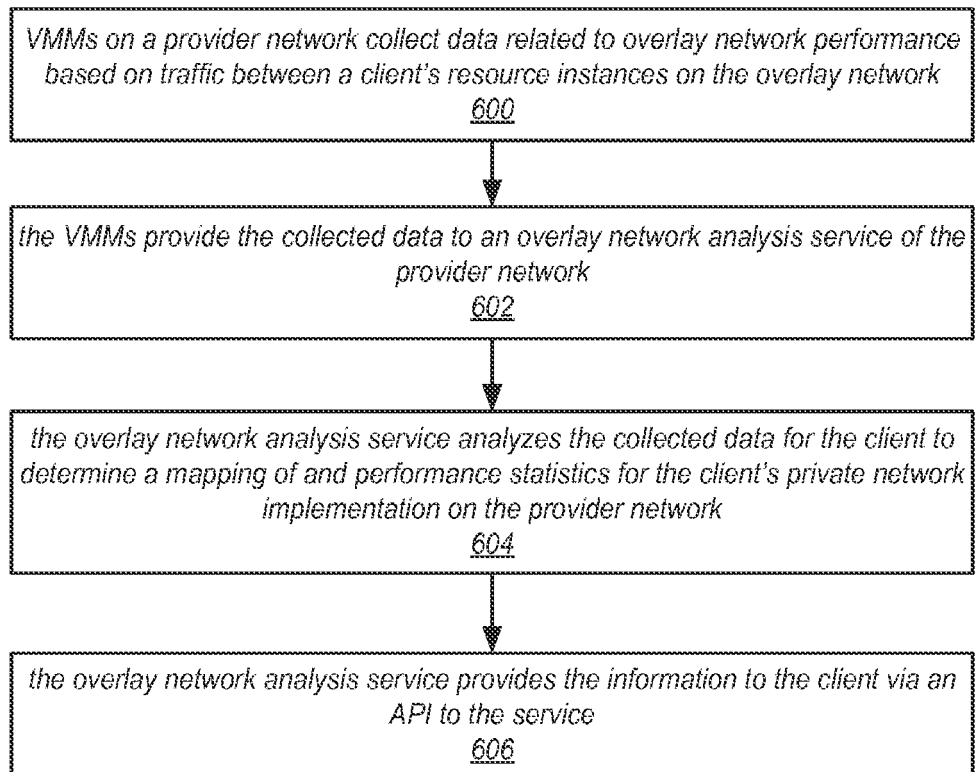


FIG. 6

7 / 13


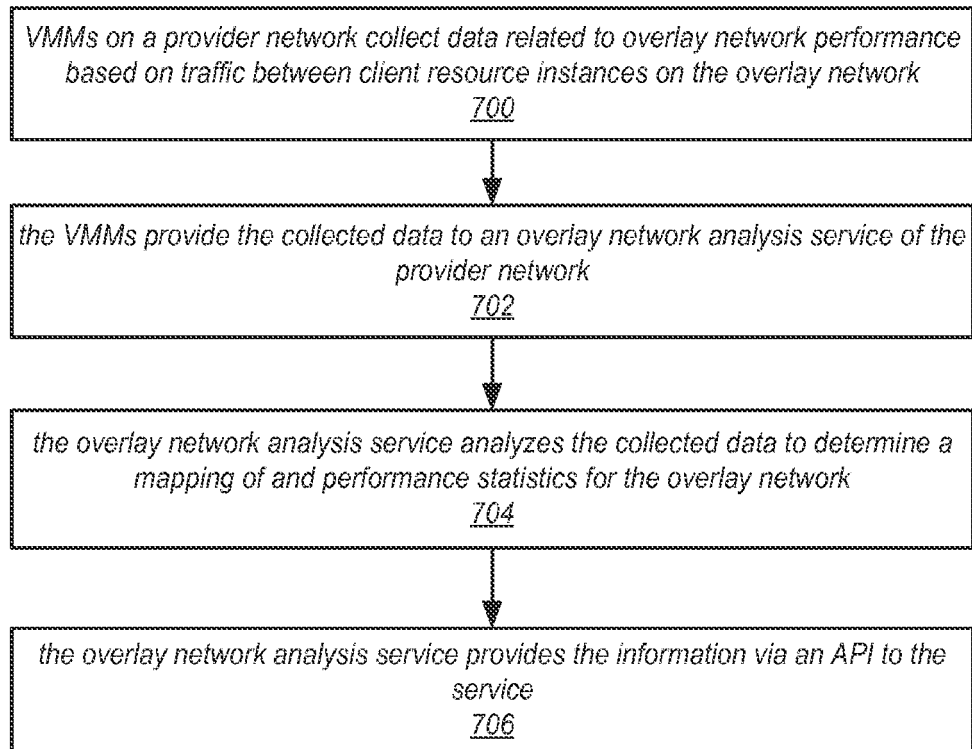


FIG. 7

resource instance A → resource instance B data flow 800	throughput 802	latency 804	packet loss rate 806
---	-------------------	----------------	-------------------------

FIG. 8A


FIG. 8B

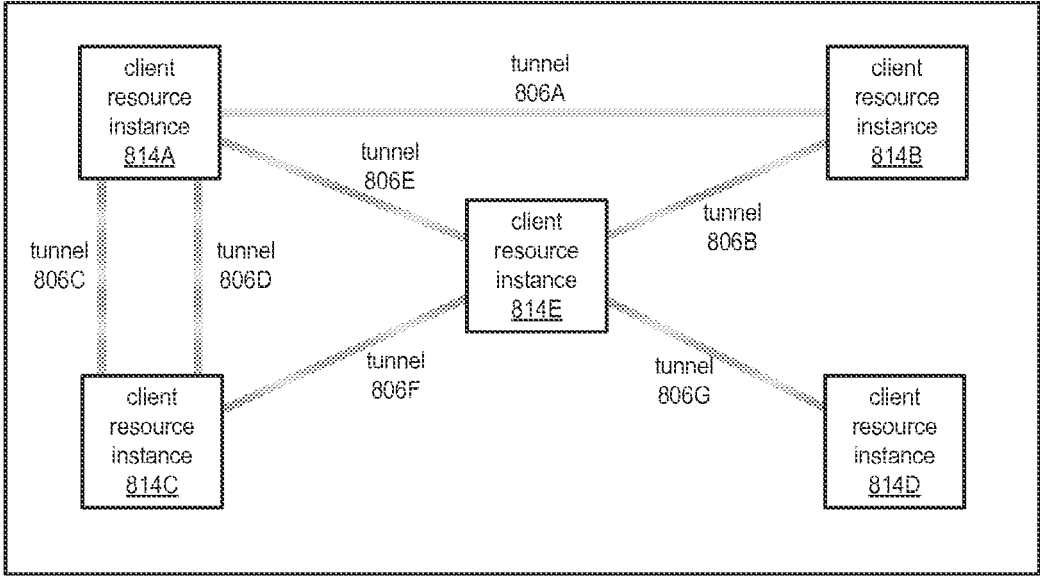

VMM A → VMM B route 830	throughput 832	latency 834	packet loss rate 836
----------------------------	-------------------	----------------	-------------------------

FIG. 8C

FIG. 8D

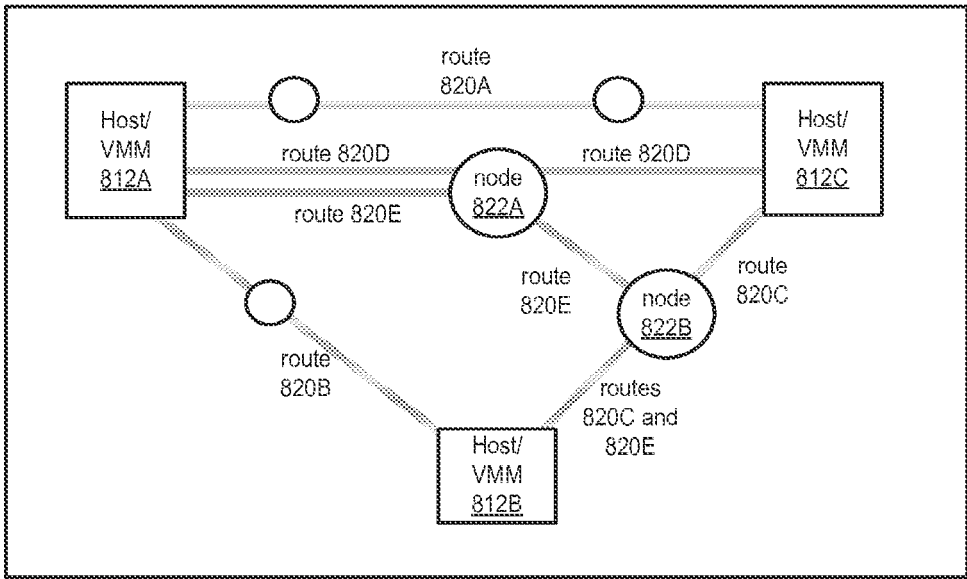

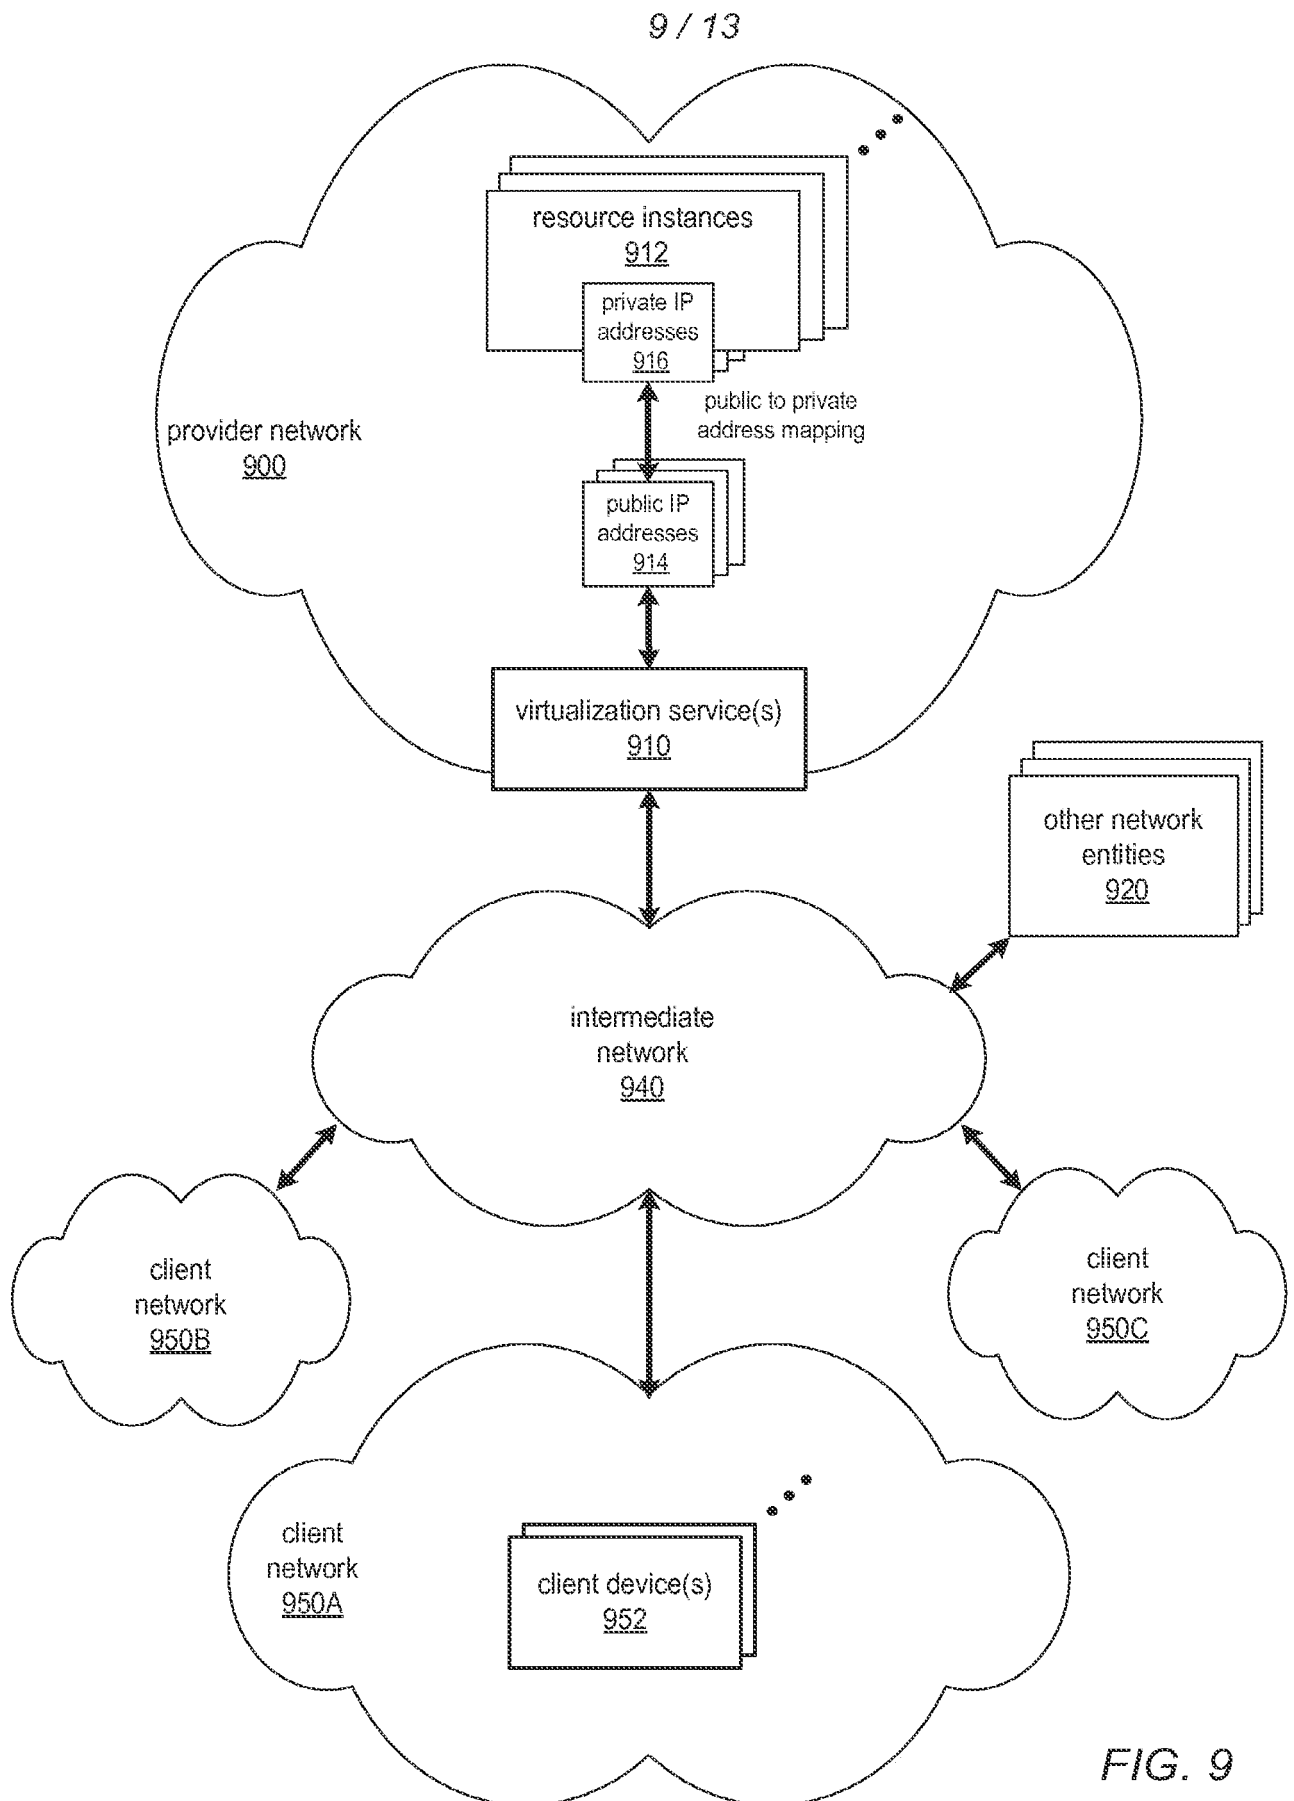


FIG. 9

10 / 13


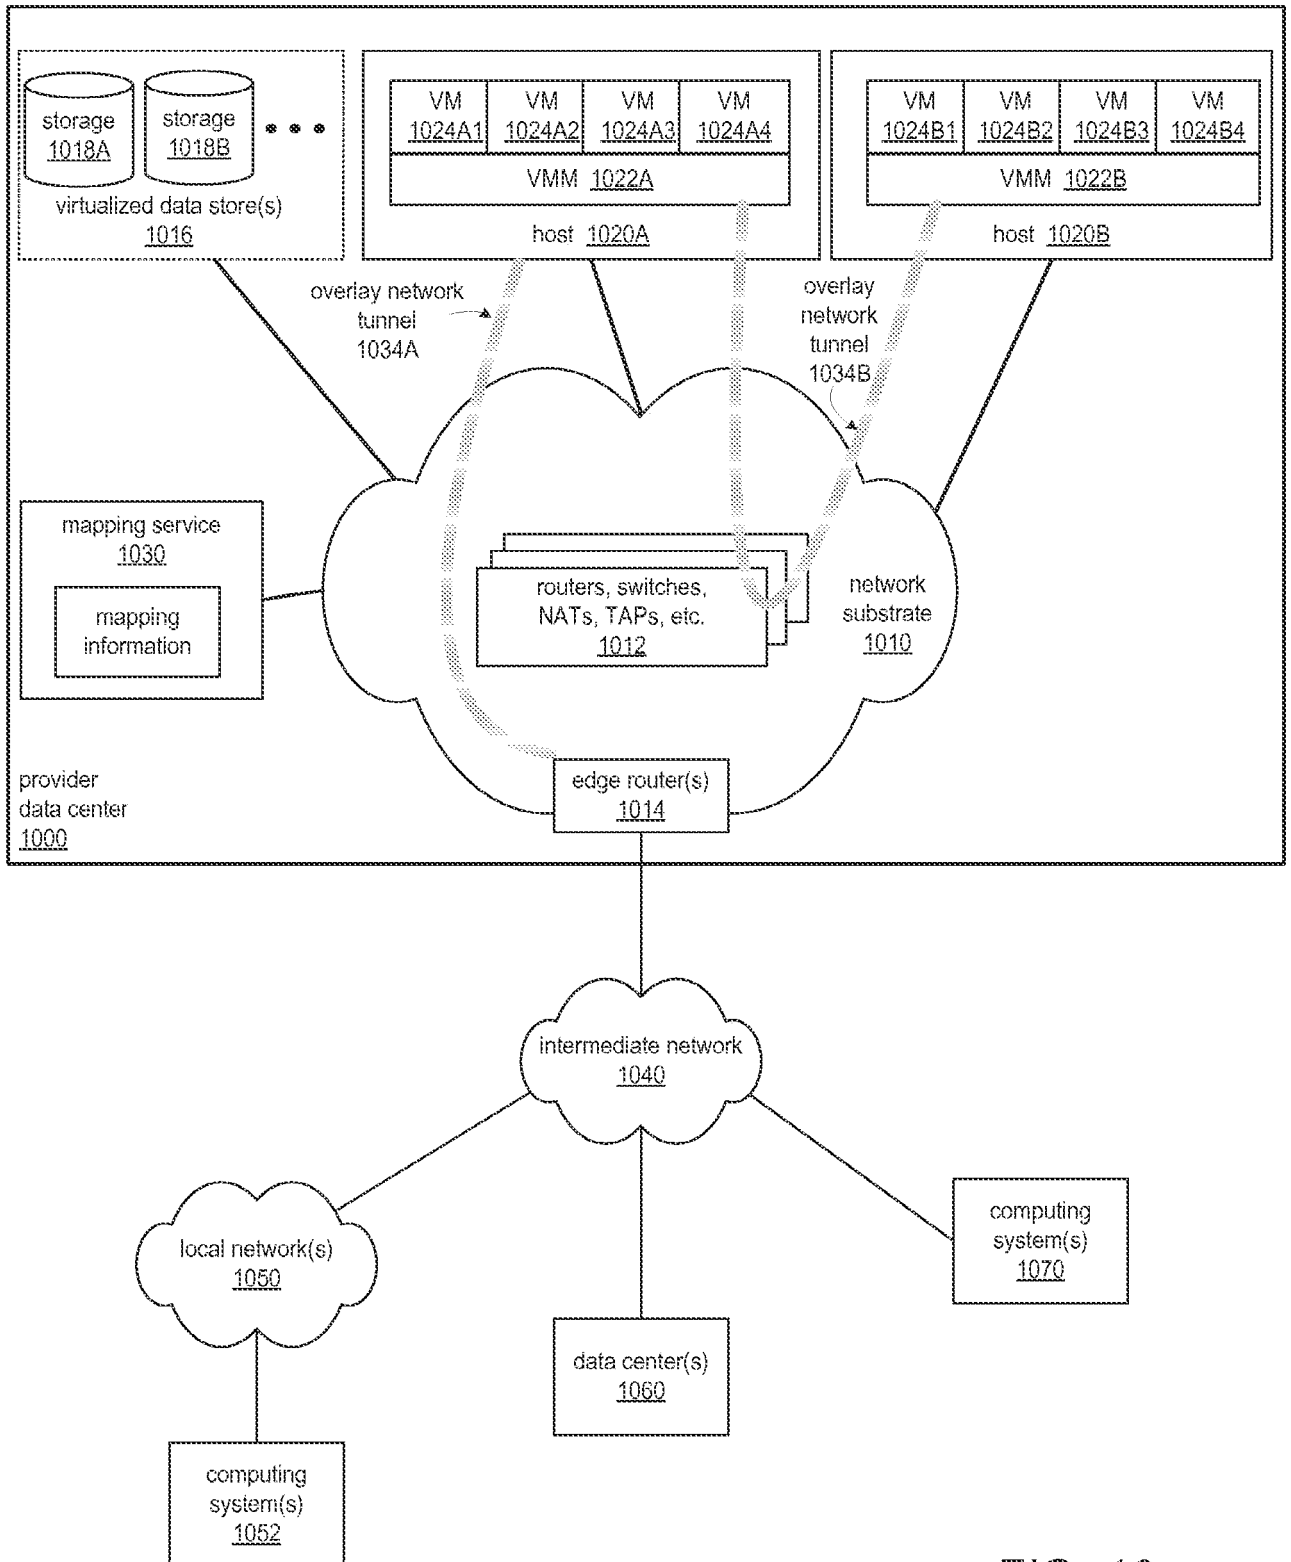


FIG. 10

11 / 13

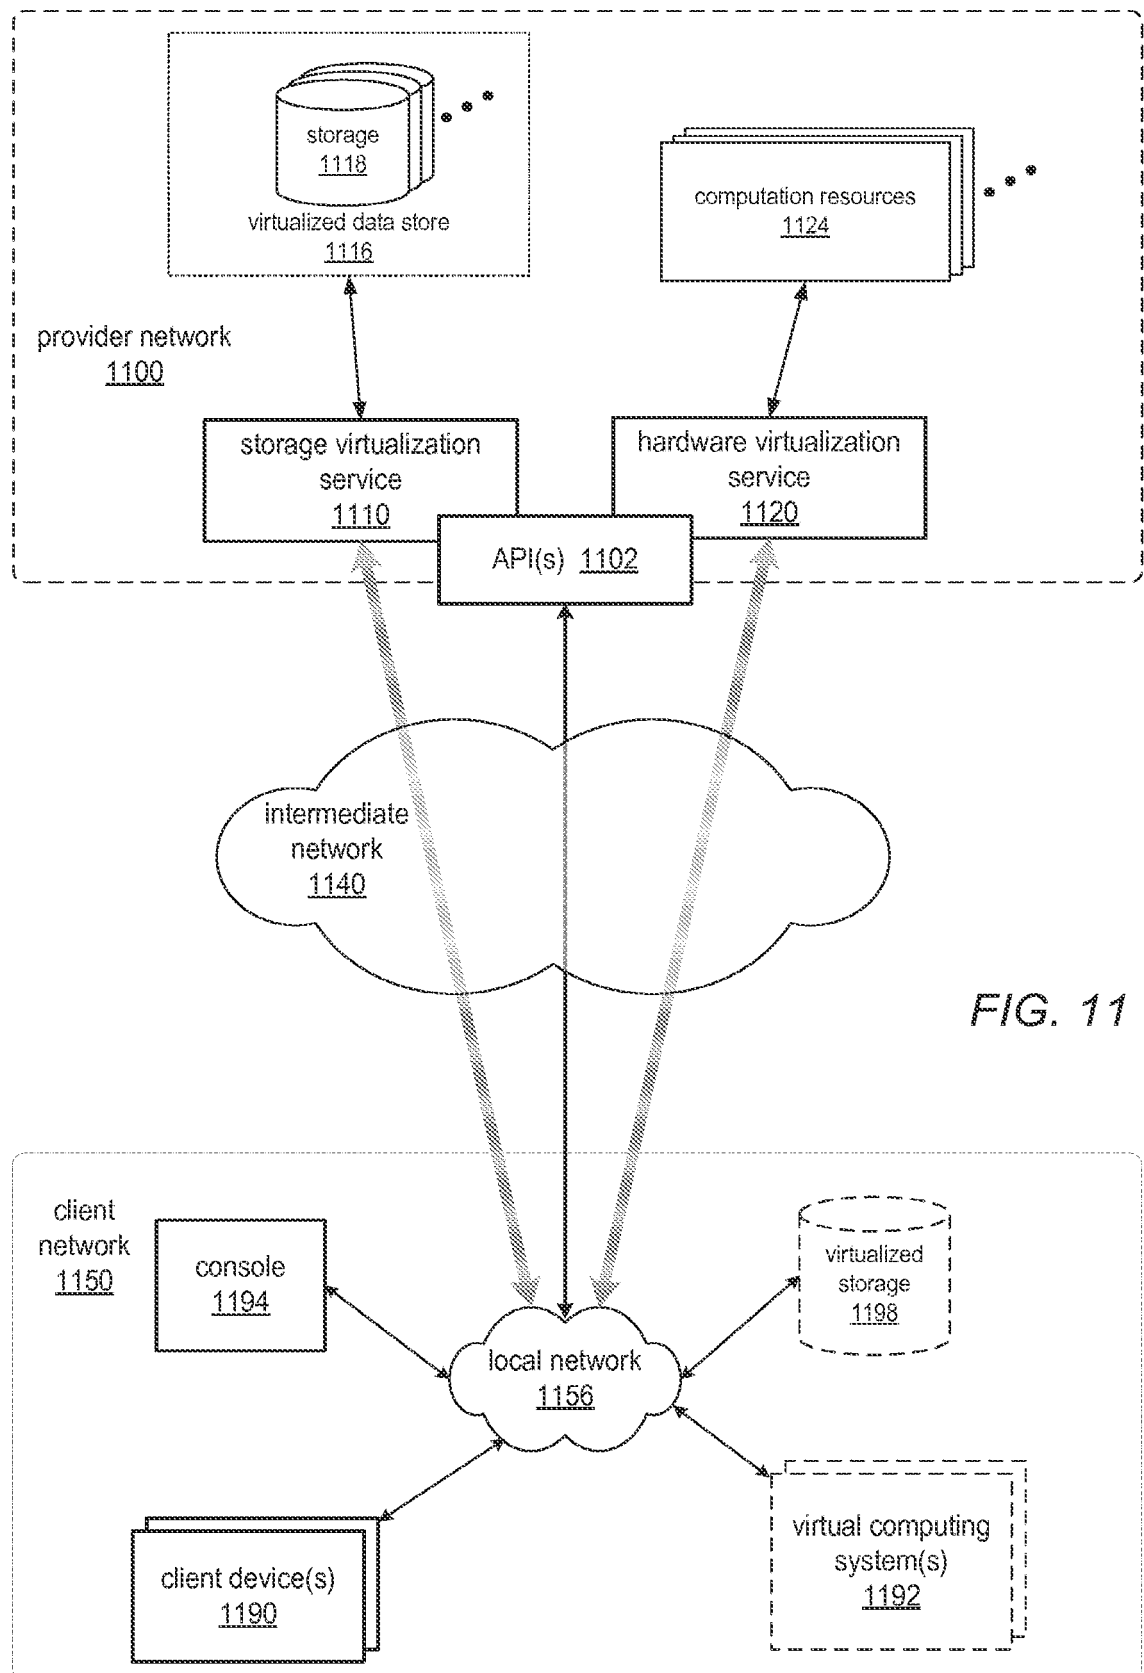

12 / 13

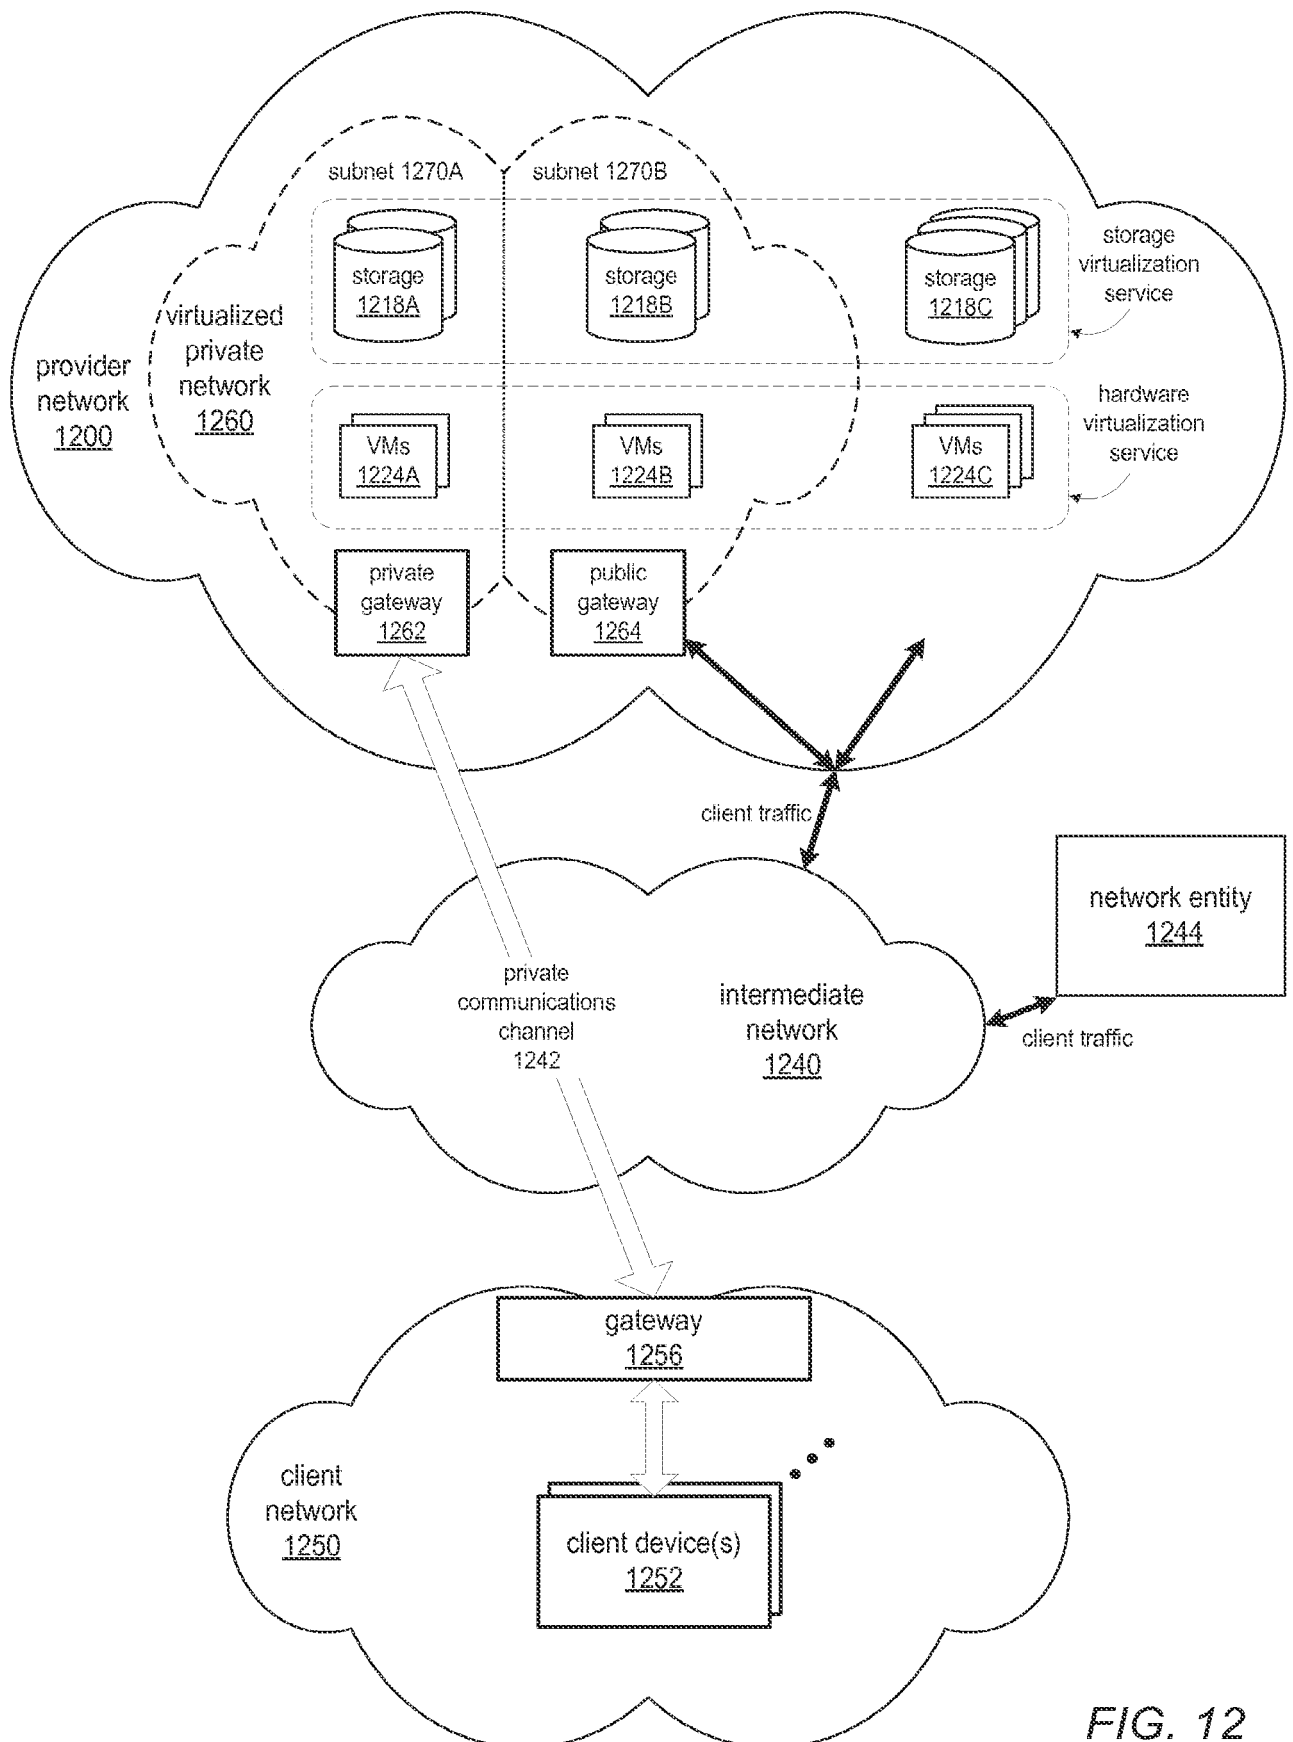


FIG. 12

13 / 13

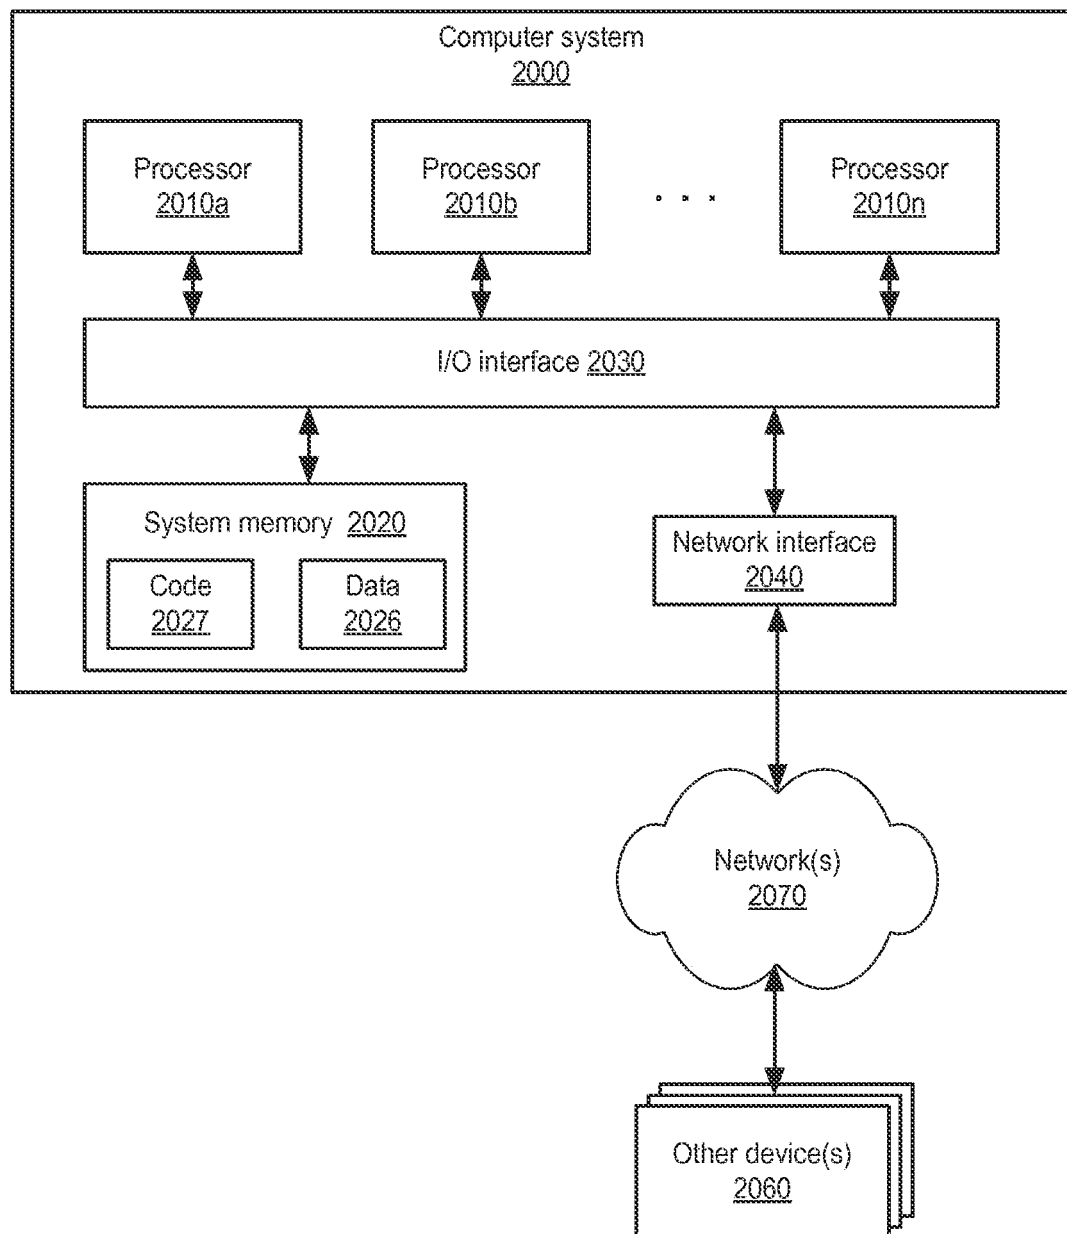


FIG. 13