



- (51) International Patent Classification:
B63B 25/24 (2006.01) *B63B 25/28* (2006.01)
- (21) International Application Number:
PCT/FI2013/050806
- (22) International Filing Date:
16 August 2013 (16.08.2013)
- (25) Filing Language: Finnish
- (26) Publication Language: English
- (30) Priority Data:
20135823 8 August 2013 (08.08.2013) FI
- (71) Applicant: MACGREGOR FINLAND OY [FI/FI]; Hal-
limestarinkatu 6, FI-20780 Kaarina (FI).
- (72) Inventor: NISSINEN, Esko; Tähkiönkatu 10 G 47, FI-
20240 Turku (FI).
- (74) Agent: HEINÄNEN OY; Äyritie 8 D, FI-01510 Vantaa
(FI).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

- (54) Title: ARRANGEMENT FOR SUPPORTING CONTAINERS TO BE TRANSPORTED ON THE DECK OF A CARGO SHIP

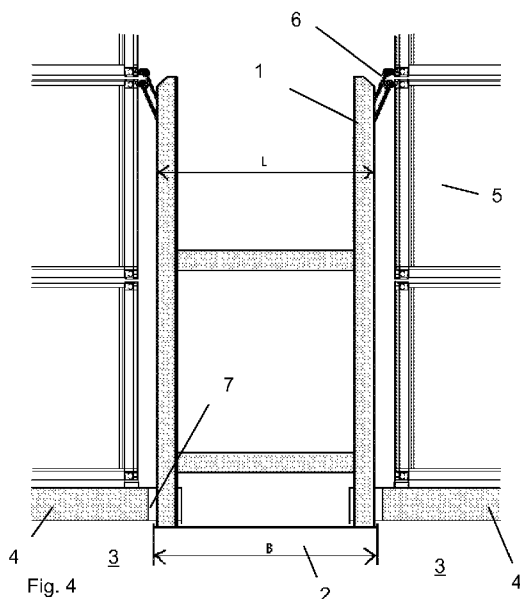

(57) Abstract: Arrangement for supporting containers (5) to be transported on the deck of a cargo ship, which arrangement comprises hatch covers (4) to be placed on top of the cargo compartments (3) of the cargo ship, on top of which hatch covers containers (5) are transported, and which arrangement also comprises lashing bridges (1) that are transverse to the cargo ship, which are fixed to the transverse members (2) between the cargo compartments (3), and on which lashing bridges (1) the containers (5) are supported with lashing bars (6), and which hatch covers (4) are disposed between the lashing bridges (1) in such a way that they can be lifted off and lowered back into their positions. The invention is implemented in such a way that the ratio of the greatest width (L) of the support structures of a lashing bridge (1) disposed on a transverse member (2) to the width (B) of the transverse member is at least 0.8 at one or more points of the lashing bridge.