

GAS CARTRIDGE

The present invention relates to pressurised gas cartridges of the type which may be used in place of conventional pyrotechnic cartridges to fire bullets or other projectiles.

Pressurised gas cartridges are known, one example being that disclosed in European Patent specification EP-A-499 332, to which reference should be made. A disadvantage of the known types of gas cartridges is that they are incapable of generating sufficient rearward force to actuate recoil-operated automatic and semi-automatic weapons. Such weapons depend upon the breech block being moved rearwardly under force applied to it upon firing of a round of ammunition in order to set in train the reloading and recocking cycle.

To overcome this problem it is proposed herein that a gas cartridge should have a part which is displaced rearwardly on firing so as to apply the necessary force to the breech block. In a preferred embodiment, the gas used to eject the projectile from the cartridge disclosed in the above mentioned specification is admitted to an expansion chamber prior to being used to eject the projectile, where it acts on the rearwardly movable part.

Preferably the cartridge case is of telescopic construction and has a sleeve which is slidably mounted on a body housing the gas chambers and operating parts. The sleeve may have a forward end wall which overlies the forward end wall of the body, and the expansion chamber is defined between the two end walls. The pressure of gas in the expansion chamber acts on the end wall of the body and drives the body rearwards in the manner of a piston. The sleeve is held in place by engagement with the wall of the chamber of the weapon. The gas is subsequently discharged from the expansion chamber and used to eject the bullet or other projectile. The moment at which the

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

gas is discharged from the expansion chamber is preferably determined by the sleeve and body entering predetermined relative positions. To this end, the body may have an axially extending spigot which normally projects into and obturates an aperture in the end wall of the sleeve. The relative movement between the sleeve and body leads to the spigot being progressively withdrawn from the aperture until, in said predetermined relative positions, the spigot is withdrawn from the aperture and the gas from the expansion chamber exhausts through it. Although the bullet or other projectile may be held in place to the rim of the sleeve in a conventional way, it may alternatively be fitted to the spigot from which it is released at the instant the pressurised gas is applied to the projectile. Other arrangements for causing a part of a cartridge to be displaced rearwardly may be used in place of that described above.

In the drawings:

Figure 1 is a longitudinal section through a pressurised gas cartridge in its charged state prior to firing,

Figure 2 shows the parts in their relative positions shortly after firing,

Figure 3 shows the parts in their relative positions at the end of the firing sequence.

The preferred embodiment of the invention will be described in the context of the cartridge disclosed in the above-mentioned specification to which reference should be made for a full understanding of the operating mechanism and its manner of operation.

Referring to Figure 1, the cartridge proposed herein has a two-part case formed from a body 10 and a sleeve 14 mounted

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED


3

telescopically on the body. The sleeve has a radially inwardly extending wall 16 at its forward end which bounds an aperture 53. Because the cylindrical portion of the sleeve is not under any gas pressure it may have a relatively thin wall. The body is provided at its forward end with an external annular shoulder 54 arranged to cooperate with an internal shoulder 54' at the rearward end of the sleeve in order to limit relative movement of the two parts. An O-ring 55 seals the body to the sleeve at their forward ends.

The body has a radially inwardly extending wall 33 at its forward end which in the charged state is in close contact with the end wall of the sleeve. An axial spigot 51 projects from the wall 33 and is a sliding fit in the aperture 53. A cavity in the inner side of the wall 33 has a cylindrical portion which serves as a seat for the head 36 of a piston valve having a stem 13. The end wall of the cavity is conical in shape and formed with ports 34 opening into an annular V-sectioned groove in the outer surface of the end wall 33. The groove 60 forms a part of an expansion chamber to be described later. The valve head 36 is formed with a pair of collars 31, 32 defining a groove which receives an O-ring sealing the valve head against the cavity.

An insert 11 is screwed into the rearward end of the body and is sealed relative to the body by an O-ring 15. The insert has a cylindrical extension which defines a bore 20 which guides a skirt portion 57 at the rearward end of the stem 13. A primary gas chamber 21 surrounding the piston valve contains a gas, conveniently air, under a pressure which is preferably at least 50 bar (5×10^7 Pa) and more preferably substantially 200 bar (2×10^7 Pa).

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

4

In the charged state of the cartridge as shown in Figure 1, the body and sleeve are in their closed positions with the two end walls juxtaposed.

Upon the cartridge being fired, the piston valve is moved rearwardly, initially into the position shown in Figure 2. The valve head 36 is therefore withdrawn from the cavity 35 and frees the ports 34. Gas from the primary chamber escapes into the groove 60 and causes the body to begin its rearward movement relative to the sleeve. This movement begins the enlargement of an expansion chamber 61 which continues to enlarge as rearward movement of the body continues. Gas is prevented from escaping between the body and sleeve by the O-ring 55. During this movement the spigot slides back through the aperture 53 until eventually it is withdrawn completely therefrom into the position shown in Figure 3. The air from the expansion chamber now escapes through the aperture 53 and ejects any projectile carried by the cartridge. The projectile may be held in place by a lip on the rim of the wall 16, or may be provided with a socket which receives the spigot 51.

In the charged state of the cartridge as shown in Figure 1, the body and sleeve are in their closed positions with the two end walls juxtaposed.

The operating mechanism for the cartridge is substantially as described in the above-mentioned specification and will therefore be described only briefly.

The rearward movement of the piston valve is initiated by displacement of a relief valve which comprises a spool member supported within the skirt 57 of the piston valve. The spool member has a central body portion 12 and forward and rearward shoulders 42, 43 defining grooves for receiving O-rings 40, 41. A stem portion extends rearwardly from the shoulder 43 and is located within a relief passage 23. Frusto-conical valve seats 44 in the relief passage 23 are contacted by a complementary

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

portion of the rearward shoulder and by the rearward O-ring. The forward O-ring 40 is sealed against the bore within the skirt 57. A compression spring 50 applies a relatively weak pressure to the spool member. Two chambers are thereby formed, namely a secondary chamber 22 located between the end of the skirt 57 and the seal ring 41 and third chamber 47 located within the skirt 57 forwardly of the shoulder 42. The chamber 22 is in communication with the primary chamber 21 through a bleed passage existing between the skirt and the bore 20, so that in the charged state the pressures within the chambers 21 and 22 are equalised. A duct 46 extends through the spool member to connect the chamber 47 to a vent in the peripheral surface of the stem portion, whereby the chamber 47 is at atmospheric pressure.

Upon the stem portion 45 being struck by a firing pin moving in the direction of the arrow "A", the spool member is propelled into the skirt, so lifting the rearward shoulder 43 and O-ring 41 from their seats. Gas in the chamber 22 vents to atmosphere through the relief passage. Although some gas flows through the bleed passage 24 from chamber 21, this flow is negligible and does not prevent the pressure in the chamber 22 falling sharply. The gas in chamber 21 applies pressure to the forward surface of the skirt 57 which greatly overcomes that applied by gas in chamber 22 to the rearward rim of the skirt, and the piston valve tends to move rearwards, as discussed above. Because chamber 47 is at atmospheric pressure and able to vent through duct 46, the spool member is drawn into the skirt, thereby allowing the piston valve to move towards the position shown in Figure 3.

By varying the length of the spigot 51 or the length of the body of the cartridge or the ratio of the former to the latter, the time at which gas is released and the projectile discharged may be adjusted relative to the rearward motion of the body.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

6

A cartridge in accordance with the invention has the advantage over pyrotechnic cartridges that it is reusable. It is therefore very suitable for use as training ammunition, particularly for semi-automatic pistols and other recoil-operated weapons. The cartridge may also be particularly suitable for use in paint-ball guns, because the ball may be adapted easily to fit on the spigot 51. Although the cartridge has been described as being used to eject a projectile, it will be appreciated that it may be used as a "blank" without a projectile but will still be capable of applying force to the breech block.

Modifications may be made to the cartridge described herein within the scope of the invention. In particular, other types of valve arrangements may be employed to admit gas to the expansion chamber in response to the cartridge being struck by the firing pin, and other valve arrangements may be used to discharge gas from the expansion chamber and the desired instant.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

7

CLAIMS



1. A cartridge in which a chamber containing gas under pressure is vented to apply force to eject a projectile, wherein the gas being vented is employed to displace a part of the cartridge to the rear, whereby force is applied to a breech block of a weapon in which the cartridge is used.
2. A cartridge having a case comprising a body housed telescopically within a sleeve, the body enclosing a main chamber for containing gas under pressure, a valve mechanism for venting gas from the forward end of the case, and means for utilising the pressure of the gas prior to venting from the case to cause the body to move rearwardly relative to the sleeve.
3. A cartridge as claimed in claim 2, wherein an expansion chamber is disposed between the forward ends of the body and sleeve, and a first valve is provided to vent gas from the main chamber into the expansion chamber, and a second valve is provided to vent gas from the expansion chamber through the casing.
4. A cartridge as claimed in claim 3, wherein the second valve comprises a spigot projecting from the forward end of the body and being slidably received in an aperture in a radial end wall of the sleeve.
5. A cartridge comprising a gas chamber for containing gas under pressure, an expansion chamber of variable volume for receiving gas from the gas chamber, a first valve arranged to open in response to the impact on the cartridge of a firing pin and allow gas to flow from the gas chamber to the expansion chamber, and a second valve arranged to open in response to a

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

predetermined increase in the volume of the expansion chamber and allow gas to vent from the expansion chamber.

6. A cartridge as claimed in claim 5, wherein the expansion chamber is defined between the respective forward end walls of telescopically arranged sleeve and body parts of the cartridge.

7. A gas cartridge having a case comprising a body surrounded telescopically by a sleeve, and means responsive to firing of the cartridge for causing the body to move rearwardly relative to the sleeve.



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

9

ABSTRACT

A cartridge has a case comprising a body 10 housed telescopically within a sleeve 14. The body encloses a main chamber 21 which contains gas under pressure, and a valve mechanism for venting gas from the chamber 21 into an expansion chamber 61. The pressure of the gas in the expansion chamber causes the body 10 to move rearwardly relative to the sleeve 14 to apply a force to the breech block of the weapon in which the cartridge is used, thereby to initiate the reloading cycle. Gas is vented from the expansion chamber to eject a projectile when a spigot 51 projecting from the body is withdrawn from an aperture 53 in the end wall of the sleeve.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

CLAIMS

1. A cartridge when used in a recoil-operated firearm, the cartridge having a chamber containing gas under pressure, gas being vented from the chamber in response to the impact on the cartridge of a firing pin, the vented gas being employed to displace a part of the cartridge to the rear, whereby force is applied to a breech block of the firearm to initiate a re-loading cycle.
2. A cartridge as claimed in claim 1, including a case comprising a body enclosing the chamber containing gas under pressure, a valve mechanism for venting gas from the forward end of the case, and means for utilising the pressure of the gas prior to venting from the case to cause the body to move rearwardly relative to the sleeve.
3. A cartridge as claimed in claim 2, wherein an expansion chamber is disposed between the forward ends of the body and sleeve, and a first valve is provided to vent gas from the main chamber into the expansion chamber, and a second valve is provided to vent gas from the expansion chamber through the casing.
4. A cartridge as claimed in claim 3, wherein the second valve comprises a spigot projecting from the forward end of the body and being slidably received in an aperture in a radial end wall of the sleeve.
5. A cartridge as claimed in claim 4, including a projectile supported on the spigot.
6. A cartridge when used in a recoil-operated firearm substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

REPLACEMENT SHEET

16 JUL 1999

8

GAS CARTRIDGE



ABSTRACT

A cartridge has a case comprising a body 10 housed telescopically within a sleeve 14. The body encloses a main chamber 21 which contains gas under pressure, and a valve mechanism for venting gas from the chamber 21 into an expansion chamber 61. The pressure of the gas in the expansion chamber causes the body 10 to move rearwardly relative to the sleeve 14 to apply a force to the breech block of the weapon in which the cartridge is used, thereby to initiate the reloading cycle. Gas is vented from the expansion chamber to eject a projectile when a spigot 51 projecting from the body is withdrawn from an aperture 53 in the end wall of the sleeve.

REPLACEMENT SHEET

16 JUL 1999

This Sheet Has Been Replaced

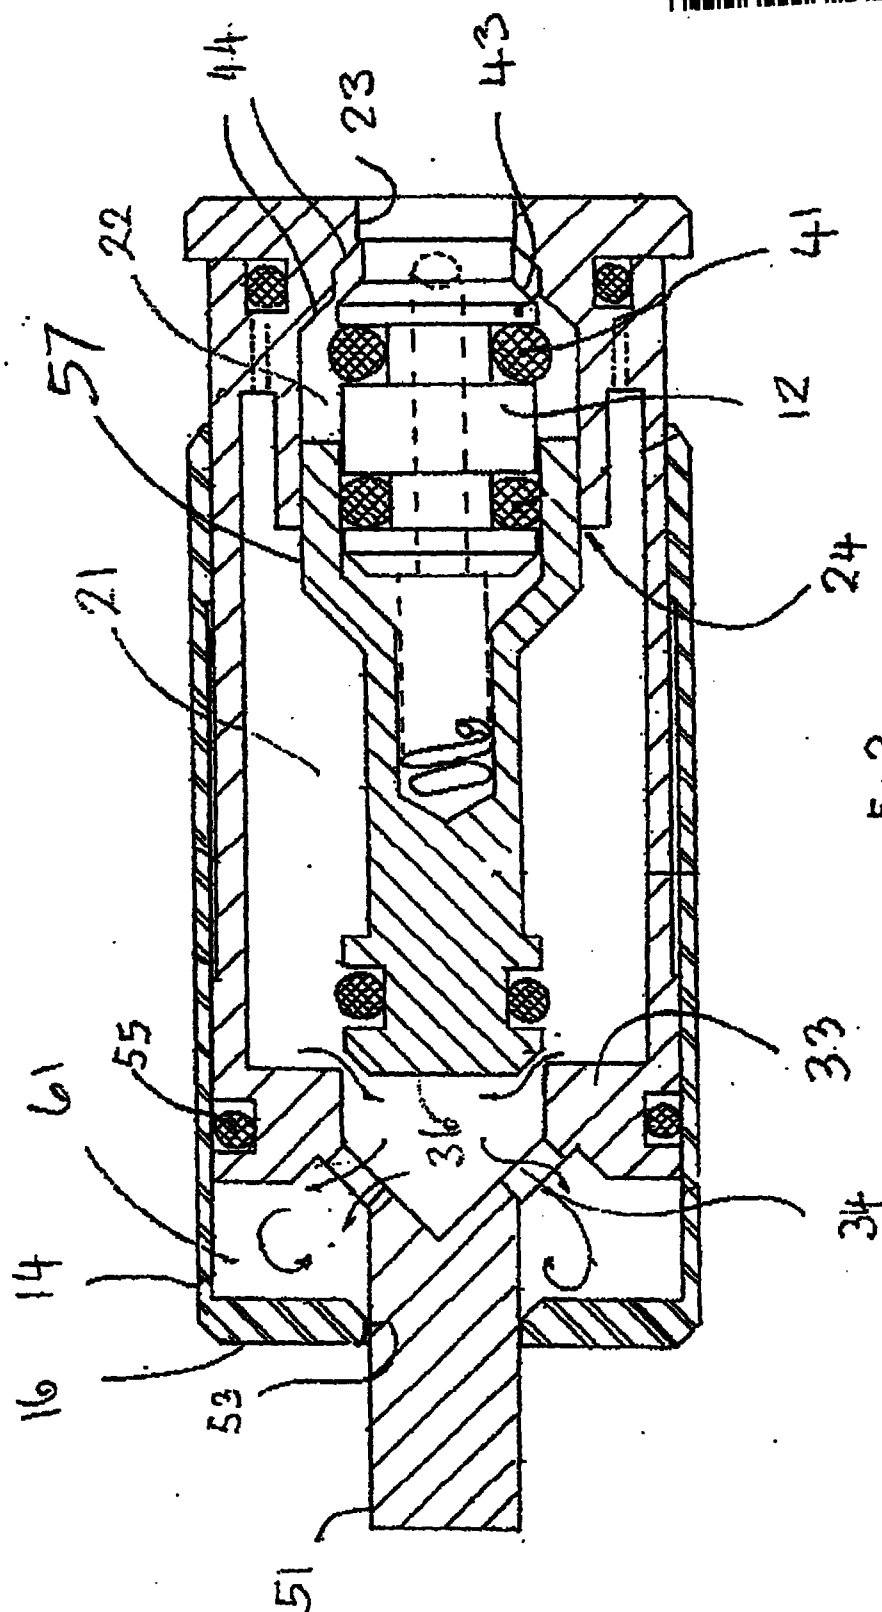

File 2.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced

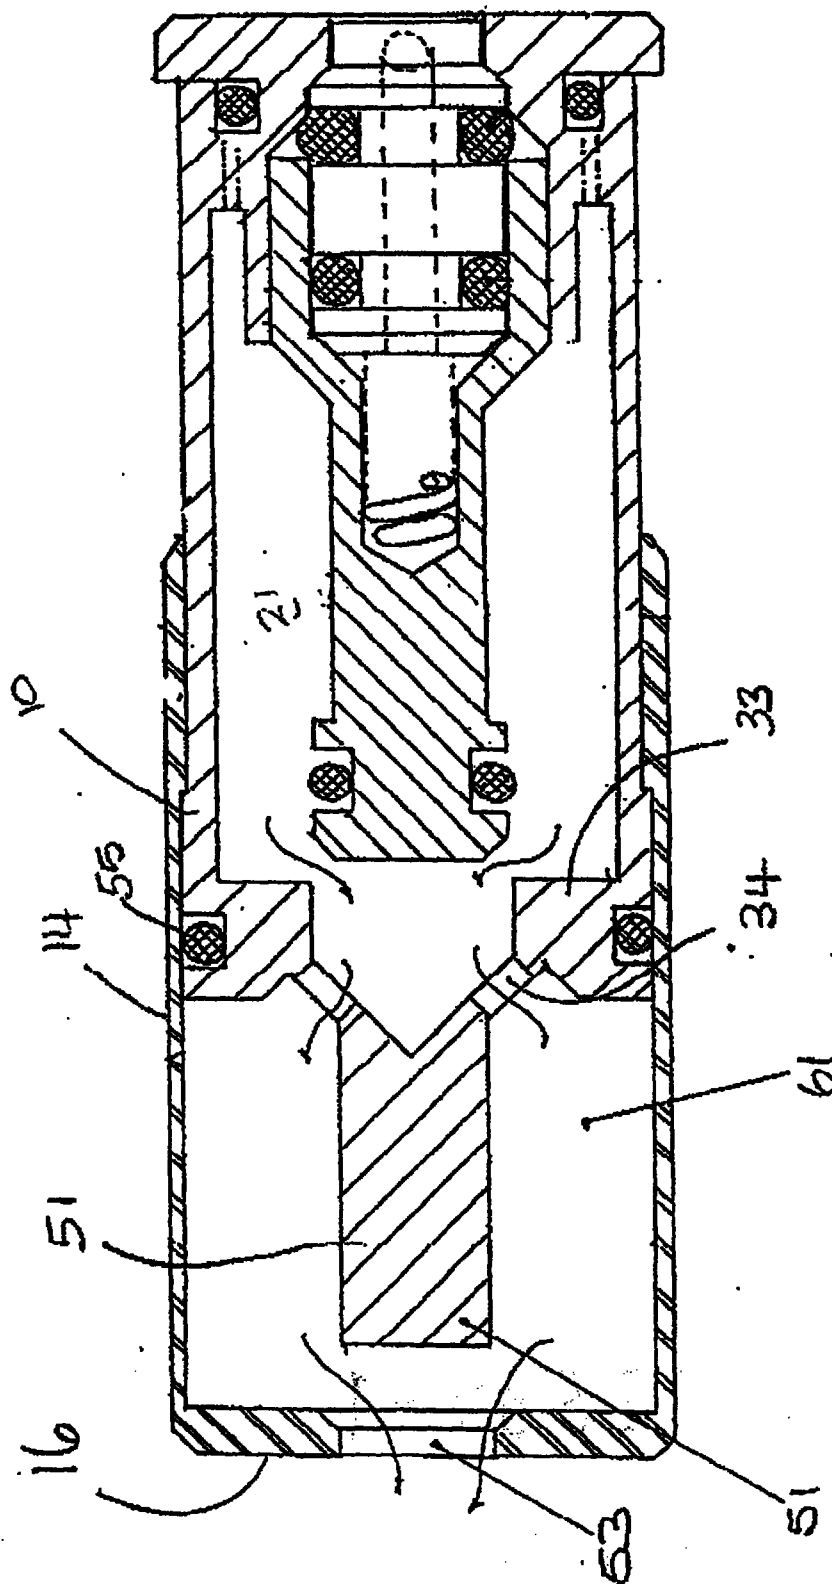


Fig. 3.

THIS SHEET HAS BEEN
REPLACED

GAS CARTRIDGE

The present invention relates to pressurised gas cartridges of the type which may be used in place of conventional pyrotechnic cartridges to fire bullets or other projectiles.

Pressurised gas cartridges are known, one example being that disclosed in European Patent specification EP-A-499 332, to which reference should be made. A disadvantage of the known types of gas cartridges is that they are incapable of generating sufficient rearward force to actuate recoil-operated automatic and semi-automatic weapons. Such weapons depend upon the breech block being moved rearwardly under force applied to it upon firing of a round of ammunition in order to set in train the reloading and recocking cycle.

To overcome this problem it is proposed herein that a gas cartridge should have a part which is displaced rearwardly on firing so as to apply the necessary force to the breech block. In a preferred embodiment, the gas used to eject the projectile from the cartridge disclosed in the above mentioned specification is admitted to an expansion chamber prior to being used to eject the projectile, where it acts on the rearwardly movable part.

Preferably the cartridge case is of telescopic construction and has a sleeve which is slidably mounted on a body housing the gas chambers and operating parts. The sleeve may have a forward end wall which overlies the forward end wall of the body, and the expansion chamber is defined between the two end walls. The pressure of gas in the expansion chamber acts on the end wall of the body and drives the body rearwards in the manner of a piston. The sleeve is held in place by engagement with the wall of the chamber of the weapon. The gas is subsequently discharged from the expansion chamber and used to eject the bullet or other projectile. The moment at which the

REPLACEMENT SHEET

12 SEP 1997

gas is discharged from the expansion chamber is preferably determined by the sleeve and body entering predetermined relative positions. To this end, the body may have an axially extending spigot which normally projects into and obturates an aperture in the end wall of the sleeve. The relative movement between the sleeve and body leads to the spigot being progressively withdrawn from the aperture until, in said predetermined relative positions, the spigot is withdrawn from the aperture and the gas from the expansion chamber exhausts through it. Although the bullet or other projectile may be held in place to the rim of the sleeve in a conventional way, it may alternatively be fitted to the spigot from which it is released at the instant the pressurised gas is applied to the projectile. Other arrangements for causing a part of a cartridge to be displaced rearwardly may be used in place of that described above.

In the drawings:

Figure 1 is a longitudinal section through a pressurised gas cartridge in its charged state prior to firing,

Figure 2 shows the parts in their relative positions shortly after firing,

Figure 3 shows the parts in their relative positions at the end of the firing sequence.

The preferred embodiment of the invention will be described in the context of the cartridge disclosed in the above-mentioned specification to which reference should be made for a full understanding of the operating mechanism and its manner of operation.

Referring to Figure 1, the cartridge proposed herein has a two-part case formed from a body 10 and a sleeve 14 mounted


REPLACEMENT SHEET

12 SEP 1997

telescopically on the body. The sleeve has a radially inwardly extending wall 16 at its forward end which bounds an aperture 53. Because the cylindrical portion of the sleeve is not under any gas pressure it may have a relatively thin wall. The body is provided at its forward end with an external annular shoulder 54 arranged to cooperate with an internal shoulder 54 at the rearward end of the sleeve in order to limit relative movement of the two parts. An O-ring 55 seals the body to the sleeve at their forward ends.

The body has a radially inwardly extending wall 33 at its forward end which in the charged state is in close contact with the end wall of the sleeve. An axial spigot 51 projects from the wall 33 and is a sliding fit in the aperture 53. A cavity in the inner side of the wall 33 has a cylindrical portion which serves as a seat for the head 36 of a piston valve having a stem 13. The end wall of the cavity is conical in shape and formed with ports 34 opening into an annular V-sectioned groove in the outer surface of the end wall 33. The groove 60 forms a part of an expansion chamber to be described later. The valve head 36 is formed with a pair of collars 31, 32 defining a groove which receives an O-ring sealing the valve head against the cavity.

An insert 11 is screwed into the rearward end of the body and is sealed relative to the body by an O-ring 15. The insert has a cylindrical extension which defines a bore 20 which guides a skirt portion 57 at the rearward end of the stem 13. A primary gas chamber 21 surrounding the piston valve contains a gas, conveniently air, under a pressure which is preferably at least 50 bar (5×10^7 Pa) and more preferably substantially 200 bar (2×10^7 Pa).

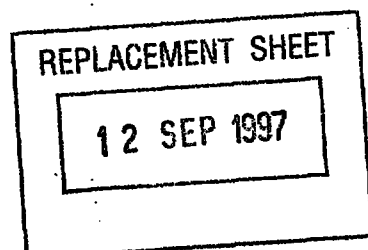


In the charged state of the cartridge as shown in Figure 1, the body and sleeve are in their closed positions with the two end walls juxtaposed.

Upon the cartridge being fired, the piston valve is moved rearwardly, initially into the position shown in Figure 2. The valve head 36 is therefore withdrawn from the cavity 35 and frees the ports 34. Gas from the primary chamber escapes into the groove 60 and causes the body to begin its rearward movement relative to the sleeve. This movement begins the enlargement of an expansion chamber 61 which continues to enlarge as rearward movement of the body continues. Gas is prevented from escaping between the body and sleeve by the O-ring 55. During this movement the spigot slides back through the aperture 53 until eventually it is withdrawn completely therefrom into the position shown in Figure 3. The air from the expansion chamber now escapes through the aperture 53 and ejects any projectile carried by the cartridge. The projectile may be held in place by a lip on the rim of the wall 16, or may be provided with a socket which receives the spigot 51. In the charged state of the cartridge as shown in Figure 1, the body and sleeve are in their closed positions with the two end walls juxtaposed.

The operating mechanism for the cartridge is substantially as described in the above-mentioned specification and will therefore be described only briefly.

The rearward movement of the piston valve is initiated by displacement of a relief valve which comprises a spool member supported within the skirt 57 of the piston valve. The spool member has a central body portion 12 and forward and rearward shoulders 42, 43 defining grooves for receiving O-rings 40, 41. A stem portion extends rearwardly from the shoulder 43 and is located within a relief passage 23. Frusto-conical valve seats 44 in the relief passage 23 are contacted by a complementary

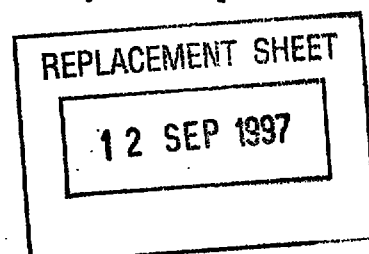

portion of the rearward shoulder and by the rearward O-ring. The forward O-ring 40 is sealed against the bore within the skirt 57. A compression spring 50 applies a relatively weak pressure to the spool member. Two chambers are thereby formed, namely a secondary chamber 22 located between the end of the skirt 57 and the seal ring 41 and third chamber 47 located within the skirt 57 forwardly of the shoulder 42. The chamber 22 is in communication with the primary chamber 21 through a bleed passage existing between the skirt and the bore 20, so that in the charged state the pressures within the chambers 21 and 22 are equalised. A duct 46 extends through the spool member to connect the chamber 47 to a vent in the peripheral surface of the stem portion, whereby the chamber 47 is at atmospheric pressure.

Upon the stem portion 45 being struck by a firing pin moving in the direction of the arrow "A", the spool member is propelled into the skirt, so lifting the rearward shoulder 43 and O-ring 41 from their seats. Gas in the chamber 22 vents to atmosphere through the relief passage. Although some gas flows through the bleed passage 24 from chamber 21, this flow is negligible and does not prevent the pressure in the chamber 22 falling sharply. The gas in chamber 21 applies pressure to the forward surface of the skirt 57 which greatly overcomes that applied by gas in chamber 22 to the rearward rim of the skirt, and the piston valve tends to move rearwards, as discussed above. Because chamber 47 is at atmospheric pressure and able to vent through duct 46, the spool member is drawn into the skirt, thereby allowing the piston valve to move towards the position shown in Figure 3.


By varying the length of the spigot 51 or the length of the body of the cartridge or the ratio of the former to the latter, the time at which gas is released and the projectile discharged may be adjusted relative to the rearward motion of the body.

REPLACEMENT SHEET

12 SEP 1997

A cartridge in accordance with the invention has the advantage over pyrotechnic cartridges that it is reusable. It is therefore very suitable for use as training ammunition, particularly for semi-automatic pistols and other recoil-operated weapons. The cartridge may also be particularly suitable for use in paint-ball guns, because the ball may be adapted easily to fit on the spigot 51. Although the cartridge has been described as being used to eject a projectile, it will be appreciated that it may be used as a "blank" without a projectile but will still be capable of applying force to the breech block.

Modifications may be made to the cartridge described herein within the scope of the invention. In particular, other types of valve arrangements may be employed to admit gas to the expansion chamber in response to the cartridge being struck by the firing pin, and other valve arrangements may be used to discharge gas from the expansion chamber and the desired instant.

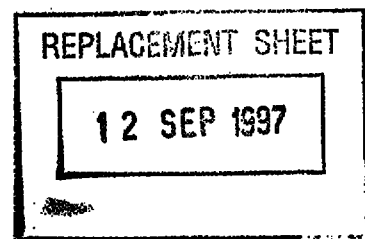

CLAIMS

THIS SHEET HAS BEEN
REPLACED

1. A cartridge in which a chamber containing gas under pressure is vented to apply force to eject a projectile, wherein the gas being vented is employed to displace a part of the cartridge to the rear, whereby force is applied to a breech block of a weapon in which the cartridge is used.
2. A cartridge having a case comprising a body housed telescopically within a sleeve, the body enclosing a main chamber for containing gas under pressure, a valve mechanism for venting gas from the forward end of the case, and means for utilising the pressure of the gas prior to venting from the case to cause the body to move rearwardly relative to the sleeve.
3. A cartridge as claimed in claim 2, wherein an expansion chamber is disposed between the forward ends of the body and sleeve, and a first valve is provided to vent gas from the main chamber into the expansion chamber, and a second valve is provided to vent gas from the expansion chamber through the casing.
4. A cartridge as claimed in claim 3, wherein the second valve comprises a spigot projecting from the forward end of the body and being slidably received in an aperture in a radial end wall of the sleeve.
5. A cartridge comprising a gas chamber for containing gas under pressure, an expansion chamber of variable volume for receiving gas from the gas chamber, a first valve arranged to open in response to the impact on the cartridge of a firing pin and allow gas to flow from the gas chamber to the expansion chamber, and a second valve arranged to open in response to a

This Sheet Has Been Replaced



REPLACEMENT SHEET

12 SEP 1997

THIS SHEET HAS BEEN
REPLACED

8


predetermined increase in the volume of the expansion chamber and allow gas to vent from the expansion chamber.

6. A cartridge as claimed in claim 5, wherein the expansion chamber is defined between the respective forward end walls of telescopically arranged sleeve and body parts of the cartridge.

7. A gas cartridge having a case comprising a body surrounded telescopically by a sleeve, and means responsive to firing of the cartridge for causing the body to move rearwardly relative to the sleeve.



This Sheet Has Been Replaced



REPLACEMENT SHEET

12 SEP 1997

THIS SHEET HAS BEEN
REPLACED

9

GAS CARTRIDGE

ABSTRACT

A cartridge has a case comprising a body 10 housed telescopically within a sleeve 14. The body encloses a main chamber 21 which contains gas under pressure, and a valve mechanism for venting gas from the chamber 21 into an expansion chamber 61. The pressure of the gas in the expansion chamber causes the body 10 to move rearwardly relative to the sleeve 14 to apply a force to the breech block of the weapon in which the cartridge is used, thereby to initiate the reloading cycle. Gas is vented from the expansion chamber to eject a projectile when a spigot 51 projecting from the body is withdrawn from an aperture 53 in the end wall of the sleeve.

Fig.1

This Sheet Has Been Replaced



REPLACEMENT SHEET

12 SEP 1997

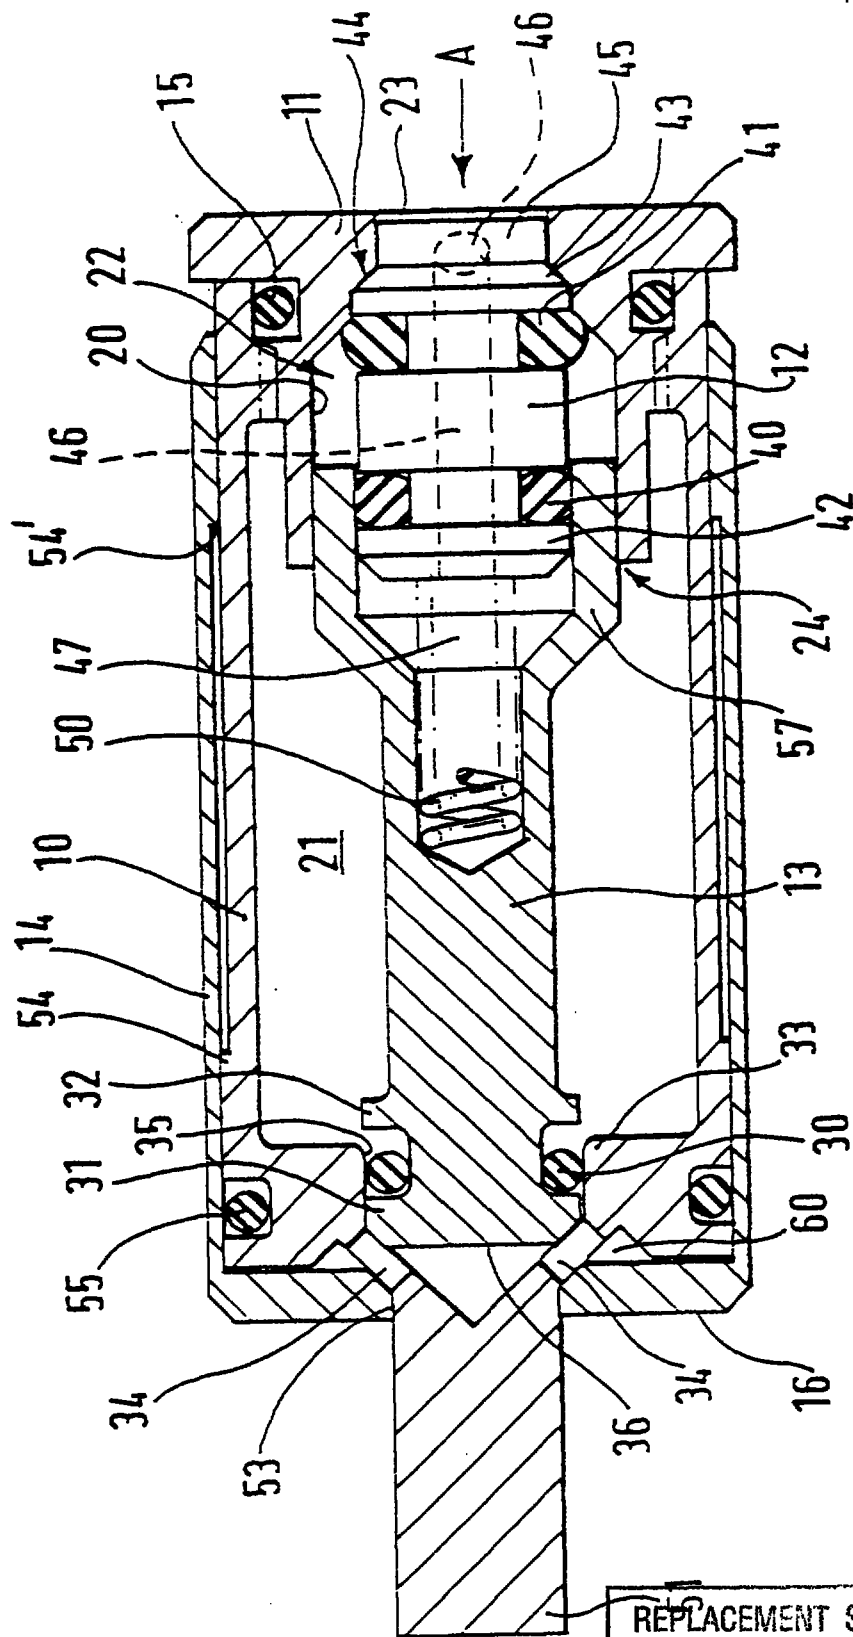


FIG. 1.

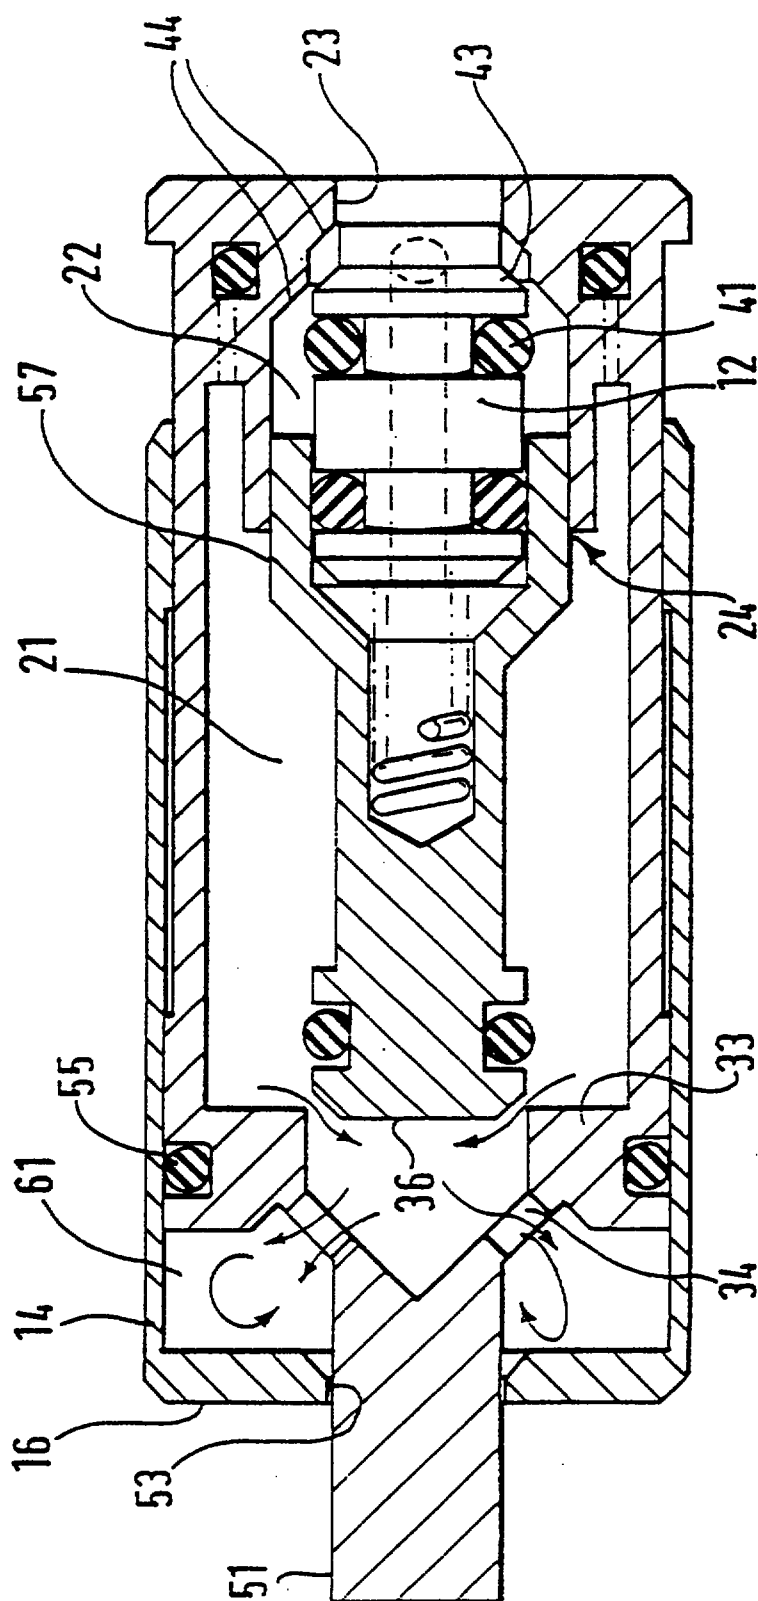


FIG.2.

REPLACEMENT SHEET

12 SEP 1997

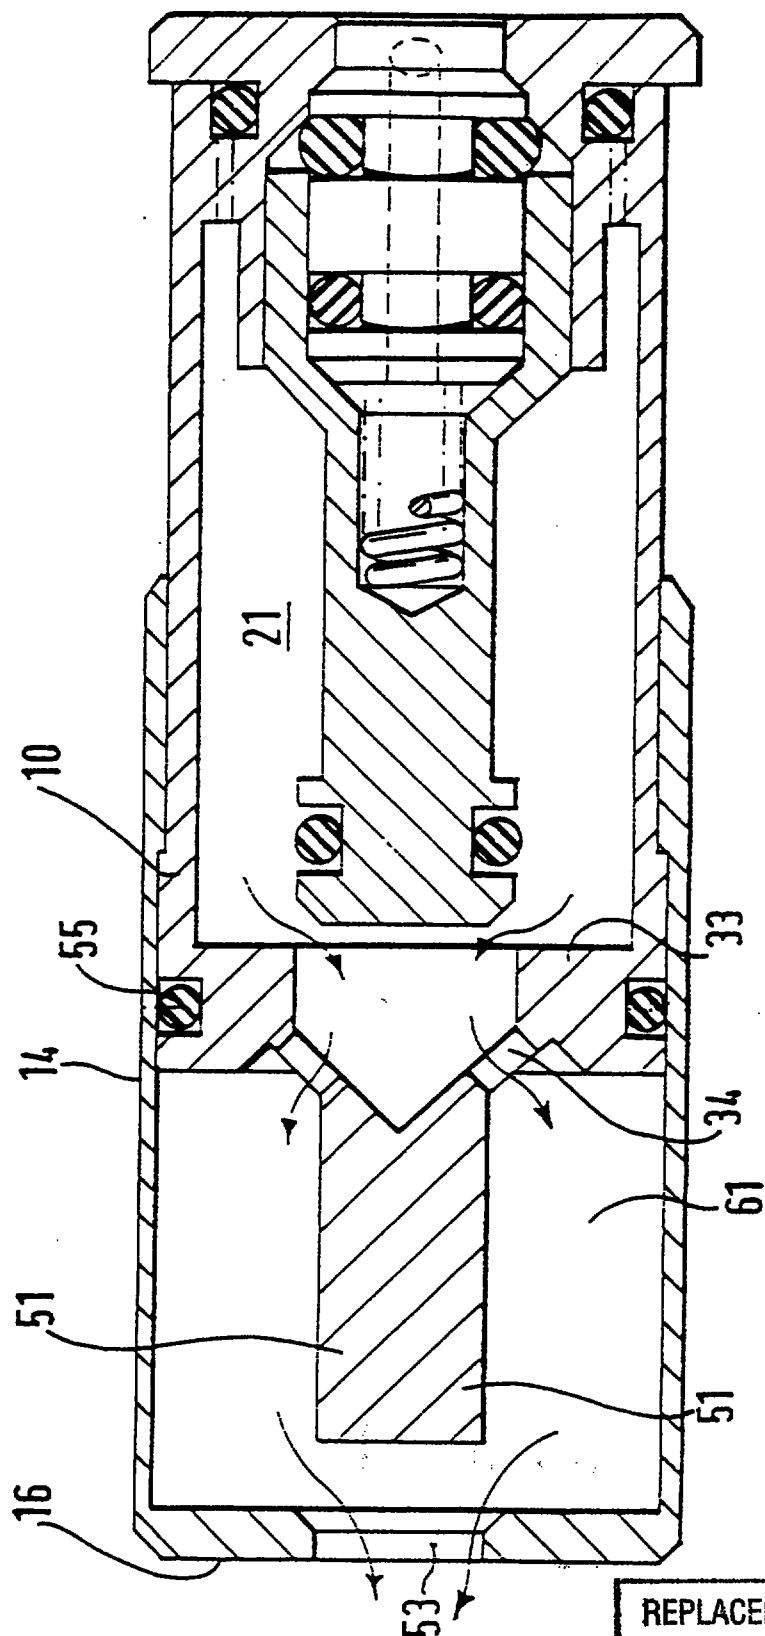


FIG. 3.

REPLACEMENT SHEET

12 SEP 1997