



DESCRIPTION

INK JET RECORDING HEAD AND PROCESS FOR
PRODUCING THE SAME

5

Technical Field

The present invention relates to an ink jet recording head having an excellent water repellency for use in an ink jet recording device and a process for producing the same.

10


Background Art

A material such as glass, a metal or a resin is used for an ink jet recording head.

In the use of a water-based ink in an ink jet recording head, when the water repellency of the surface of a nozzle is unsatisfactory, droplets of an ink are liable to adhere to the surface of the nozzle, which spoils the rectilinearity of jetted ink droplets, so that it often becomes impossible to conduct recording due to occurrence of troubles such as disturbance of setting.

For this reason, the surface of a nozzle which is a portion for jetting an ink has hitherto been subjected to a treatment for rendering the surface of the nozzle water-repellent. For example, a proposal has been made on a method wherein a particle of a water-repellent material is deposited on the surface of a nozzle, for example, by electrostatic powder coating (see Japanese Patent Application Laid-Open No. 157765/1982) and vacuum deposition and plasma polymerization (see Japanese Patent Application Laid-Open Nos. 183161/1985 and 176059/1984) to render the surface of the nozzle water-repellent.

In the above-described conventional treatment for rendering the surface of the nozzle water-repellent, it is not always easy to form a smooth repellent surface free from any defect such as a pinhole. This causes properties to be varied from product to product, and the properties to change with the elapse of time. Further, in the electrostatic powder coating, the baking



temperature should be 300°C or above. In the case of a metal, the dimensional accuracy is spoiled, and it is impossible to apply this method to a resin. When use is made of vacuum deposition, a large device should be used
5 and it is difficult to conduct the process control. Further, in this method, since the bonding strength is insufficient, only a product having an insufficient bonding strength can be obtained.

The present invention can solve the above-described
10 problem, and an object of the present invention is to provide an ink jet recording head which is excellent in the water repellency of the surface of the nozzle, the persistence of the water repellency and the durability and enables a high printing quality to be maintained for
15 a long period of time, and a process for producing the same.

Disclosure of the Invention

The above-described object can be attained by an ink jet recording head for use in an ink jet recording
20 device, wherein a water-repellent layer comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. The ink jet recording head having an excellent water-repellent property can be produced by forming the above-described
25 water-repellent layer comprising a fluoropolymer on the surface of a nozzle for jetting a nozzle by coating or transfer through the use of a solvent-soluble fluoropolymer solution.

In the treatment for rendering the surface of the
30 nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90°, preferably at least 100°, the polarizability is so small that it is useful to introduce fluorine having a remarkably small inter-molecular cohesive force.
35 Although a fluoropolymer represented by polytetrafluoroethylene has excellent features such as heat resistance, chemical resistance and weather

resistance, it is insoluble in a solvent, so that only powder coating can be applied to the fluoropolymer. This makes it possible to attain a good water-repellent property.

5

Brief Description of Drawings

Figs. 1 and 4 are schematic cross-sectional views of ink jet recording heads according to embodiments of the present invention;

Fig. 2 is a partially enlarged cross-sectional view
10 of an ink jet nozzle;

Fig. 3, Figs. 5 to 9 and Fig. 13 are typical cross-sectional views showing the steps of rendering the surface of a nozzle water-repellent;

Fig. 10 is a schematic cross-sectional view of an
15 ink jet recording head according to an embodiment of the present invention;

Figs. 11 and 12 are explanatory views showing a process for forming a water-repellent layer according to a water surface spreading method; and

20 Figs. 14 and 15 are explanatory views showing a process for forming a water-repellent layer according to a LB film forming method.


Best Mode for Carrying Out the Invention

Embodiments of the present invention will now be
25 described.

The ink jet recording head according to the present invention is mounted on an ink jet recording device and characterized in that a water-repellent layer comprising a homogeneous layer of a fluoropolymer is formed on the
30 surface of a nozzle for jetting an ink.

The above-described water-repellent layer is formed through the use of a solvent-soluble fluoropolymer. The solvent-soluble fluoropolymer is preferably amorphous. Specific preferred examples of the solvent-soluble
35 fluoropolymer include polydiperfluoroalkyl fumarate, Teflon AF (trademark, De Pont (E.I.) de Nemours & Co), solvent-soluble fluoropolymers such as CYTOP (trademark,





Asahi Glass Co., Ltd.) and alternating copolymers of fluoroethylenes with hydrocarbon ethylenes such as an alternating copolymer of diperfluoroalkyl fumarate with styrene, an alternating copolymer of ethylene trifluoride
5 chloride with a vinyl ether and an alternating copolymer of ethylene tetrafluoride with a vinyl ester, and their analogues and derivatives.

Preferred examples of the solvent include fluorinated liquids include Fluorinert (trademark, 3M
10 Co.), Garden (trademark, Montefluos), trifluoromethylbenzene and hydrochlorofluorocarbon.

The concentration of the fluoropolymer in the fluoropolymer solution is preferably 0.01 to 7 % by weight, still preferably 0.1 to 5 % by weight.

15 Since the above-described fluoropolymer is solvent-soluble, it is possible to form a water-repellent layer through the use of the fluoropolymer in a solution form according to a coating method or a transfer method. The water-repellent layer thus formed comprises a dense,
20 homogeneous film comprising a homogeneous layer or continuous layer of a fluoropolymer, and it is believed that such a film structure contributes to a remarkable improvement in the water-repellent property and the persistence of the effect of water repellency.

25 In the present invention, it is also possible to form a water-repellent layer through a coupling compound layer for the purpose of further improving the adhesion between the water repellent layer and the surface of the nozzle.

30 A further feature of the present invention is that the water-repellent layer can be formed by simple and rapid methods, for example, a coating method such as dipping and a transfer method which will be described later.


35 Specifically, the process for producing an ink jet recording head according to the present invention comprises subjecting the surface of a nozzle for jetting



an ink of an ink jet recording head to a treatment for rendering the surface of the nozzle water-repellent, characterized in that the process comprises the steps of: preparing a polymer solution of a fluoropolymer dissolved
5 in a solvent; coating through dipping said polymer solution on the whole surface of a nozzle plate provided with an ink jet hole to form a water-repellent layer comprising a fluoropolymer on the whole surface of the nozzle plate; and removing through grinding the water-
10 repellent layer on the reverse surface (the opposite side of a side from which an ink is jetted) of the nozzle plate in the water-repellent layer formed on each surface of the nozzle plate.

According to another embodiment of the process of
15 the present invention, the process may further comprise, after forming the water-repellent layer on the whole surface of the nozzle plate, forming a protective layer on only at least the inside or vicinity of the jet hole of the nozzle, removing through grinding the water-
20 repellent layer on the reverse surface (the opposite side of a side from which an ink is jetted) of the nozzle plate in the water-repellent layer formed on each surface of the nozzle plate and removing said protective layer.

According to another aspect of the present
25 invention, there is provided a process for producing an ink jet recording head, comprising subjecting the surface of a nozzle for jetting an ink of an ink jet recording head to a treatment for rendering the surface of the nozzle water-repellent, characterized in that the process
30 comprises the steps of: coating a positive-working resist on at least the reverse surface (the opposite side of a side from which an ink is jetted) of a nozzle plate provided with an ink jet hole; irradiating the nozzle plate with an ionizing radiation from the surface side of
35 the nozzle plate with the reverse surface side being light-shielded; developing the irradiated surface and removing the resist from the surface of the nozzle plate



and the inside of the nozzle hole; coating through dipping a polymer solution containing a fluoropolymer dissolved therein on the whole surface of the nozzle plate to form a water-repellent layer comprising a
5 fluoropolymer on the whole surface of the nozzle plate; and removing the resist layer and the water-repellent layer on the reverse surface side of the nozzle plate to form a water-repellent layer on only the surface side of the nozzle plate and the internal surface of the nozzle
10 hole.

When use is made of transfer, the process for producing an ink jet recording head according to the present invention comprises subjecting the surface of a nozzle for jetting an ink of the ink jet recording head
15 to a treatment for rendering the surface of the nozzle water-repellent, characterized in that the process comprises the steps of: forming a polymer layer comprising a polymer solution containing a fluoropolymer dissolved therein on the surface of a transfer medium;
20 and transferring the polymer layer formed on the transfer medium to a predetermined portion of the surface of the nozzle provided with an ink jet hole. When the transfer is conducted a plurality of times, the densiness can be increased, so that a film having a desired thickness can
25 be formed.

In the above-described process wherein use is made of transfer, it is possible to use a water surface spreading method which comprises spreading a polymer solution containing a fluoropolymer dissolved therein on
30 the surface of water, evaporating a solvent contained in the polymer solution and bringing the spread film into contact with the surface of a nozzle. When the transfer of the water surface spread film is conducted a plurality of times, a film having a desired thickness can be
35 formed.

In the process wherein use is made of transfer, a more homogeneous and dense water-repellent layer can be




formed by conducting a drying and heating treatment after the transfer of the polymer layer.

Further, in the present invention, it is possible to use a method for forming a LB film on the surface of a nozzle which comprises spreading a polymer solution containing a fluoropolymer dissolved therein on the surface of water, evaporating the solvent, moving a barrier to form a Langmuir film from the resultant spread film and bringing the resultant Langmuir film into contact with the surface of the nozzle.

In the above-described LB film, at least one layer may be laminated to a desired thickness. A more homogeneous and dense water-repellent layer can be formed by conducting a heat treatment after the transfer of the LB film.

In the transfer method, when an elastic body, such as rubber, is used as a transfer medium, in order to form a good water-repellent film, it is important to bring the surface of the transfer medium to a smooth state. The treatment of the surface of the head according to the transfer method is disclosed in Japanese Patent Application Laid-Open No. 48953/1990. This method is characterized in that use is made of a transfer medium comprising a porous material. The present inventors, however, have found that although the method wherein the transfer is conducted through the use of a porous transfer medium is excellent in the transfer efficiency, it is not always useful for forming a homogeneous, dense water-repellent layer having an excellent water-repellent property contemplated in the present invention and, as described above, the method wherein the surface of the transfer medium is brought to a smooth state is useful for this purpose. As described above, when the surface of the transfer medium (support) is brought to a smooth state, the peelability of the polymer layer from the transfer medium unexpectedly becomes so good that the polymer layer can be made thick and homogeneous.



Prior to the transfer of the polymer layer, a coupling compound layer can be formed on the surface of the nozzle, and a combination of the transfer method with the formation of the coupling compound layer enables a water-repellent layer having an excellent adhesion and a large thickness to be formed. Methods of rendering the surface of the nozzle water-repellent including a method of forming a coupling compound layer will now be described.


At the outset, the nozzle plate is immersed in a coupling solution comprising a coupling compound and a solvent and then in a solvent. The immersion of the nozzle plate in a solvent advantageously has the effect of making the thickness of coating of the coupling compound uniform to further stabilize the adhesion between the water-repellent layer and the surface of the nozzle plate.

Water and alcohols, such as methanol and ethanol, can be used as the solvent for the coupling solution.

When water is used as the solvent, the handleability becomes better. Further, since the surface tension is so large that it is possible to prevent the coupling compound from penetrating into the hole in the nozzle.

Then, the coupling coating layer is dried, and a water-repellent layer is transferred thereon. In the transfer method, an elastic body having a specular surface, for example, a silicone rubber, a urethane rubber, a butyrene rubber, gelatin or a chloroprene rubber is used as the transfer medium. The above-described fluoropolymer solution is coated on the surface of the transfer medium by spin coating or uniform pull-up immersion, and a nozzle plate is pressed against the coated surface to transfer the polymer layer to the surface of the nozzle plate.

The transferred polymer layer is then baked. It is preferred to conduct the baking at a temperature not below the glass transition point of the polymer. The



baking enables the volatile solvent contained in the polymer layer to be completely removed. Further, the present inventors have found that the heating of the transferred polymer layer to a temperature not below the glass transition point of the polymer leads to an increase in the fluidity of the polymer layer which improves the coating property and further contributes to an improvement in the adhesion.

Further, in the above-described method, the following procedure may be used. After exposure of the surface of the nozzle plate to an ozone atmosphere, a coupling layer is formed, and a water-repellent layer is then formed. Alternatively, after the formation of the coupling layer, the surface of the coupling layer may be exposed to an ozone atmosphere followed by the formation of a water-repellent layer. The surface cleaning treatment wherein use is made of ozone removes stains on the surface, which contributes to a further improvement in the adhesion of the formed layer. The ozone atmosphere can be formed by irradiation with oxygen plasma or ultraviolet rays.


The present invention will now be described in more detail with reference to the following embodiments.

Embodiment A

Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.

Example A1

A polydiperfluoroalkyl fumarate was dissolved in a fluorocarbon solvent, and the solution was spin-coated on



the surface of a nozzle in a nozzle plate comprising a polysulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 0.3
5 % by weight was coated at 3000 rpm for one min, and the coating was dried at 80°C to form a polydiperfluoroalkyl fumarate layer having a thickness of 300 Å. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The
10 film had a contact angle of 115° to water, that is, a high water repellency.

A first substrate of a polysulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and bonded to each
15 other at 80°C through a solvent cement of the same polysulfone resin dissolved in a solvent, thereby assembling an ink jet recording head. The appearance of the vicinity of the cross section of the recording head is shown in Fig. 2. Numeral 21 designates a
20 fluoropolymer layer formed by coating.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the
25 nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording
30 head maintained a sufficient ink resistance. A rubbing test was conducted through the use of a silicone rubber. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives
35 rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.


Example A2

A solvent-soluble fluoropolymer (CYTOP manufactured by Asahi Glass Co., Ltd.) was dissolved in a fluorinated liquid, and the solution was coated through dipping on the surface of a nozzle plate comprising nickel. The portions unnecessary to be rendered water-repellent were previously masked by taping, resist or the like.

A first substrate of a polycarbonate resin and the nozzle plate subjected to a treatment for rendering it water-repellent and removal of the mask were washed and dried, and then bonded to each other, thereby assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink resistance. A rubbing test was conducted through the use of a silicone rubber. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

30 Example A3

A fluoroethylene/vinyl ether copolymer was dissolved in trifluoromethylbenzene, and the solution was spin-coated on the surface of a nozzle plate comprising a polyethersulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 1 % by weight was coated at 3000 rpm for




one min, and the coating was dried at 120°C to form a fluoroethylene/vinyl ether copolymer layer having a thickness of 500 Å. The observation under a microscope has revealed that the formed thin film was very dense and
5 homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency.

A substrate of a polyethersulfone resin and the nozzle plate subjected to the surface treatment were washed and dried, and bonded to each other, thereby
10 assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was
15 successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head
20 maintained a sufficient ink resistance. A rubbing test was conducted through the use of a silicone rubber. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise
25 to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet
30 recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer formed on the surface of the nozzle may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the
35 coating method.

As described above, the present invention can provide an ink jet recording head capable of providing a



high setting quality through an effective and homogeneous treatment for rendering the surface of the nozzle water-repellent. Further, the treatment for rendering a recording head water-repellent according to the present invention is very excellent in the persistence of the water repellency, which contributes to a prolongation of the service life of the recording head.

Further, in the process for producing an ink jet recording head, since the treatment for rendering the recording head water-repellent can be conducted through the use of a very simple apparatus and step, the production can be safely conducted and the cost can be remarkably reduced, which renders the effect of the present invention large.

15 Embodiment B

In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these materials can substantially maintain properties of the conventional fluoropolymers and are soluble in a solvent, it is possible to easily obtain a smooth surface free from a pinhole through coating. However, the present inventors have found that when a hydrocarbon molecule site is present in the fluoropolymer, a water-repellent deterioration is liable to occur due to a partial deposition of a dye molecule contained in the ink.

The present invention has been made with a view to solving the above-described problem, and an object of the present invention is to provide an ink jet recording head wherein the surface of the nozzle in the ink jet recording head has a high water repellency and is excellent in the persistence of the effect of water repellency and a high setting quality can be provided for a long period of time.

The above-described object can be attained by an ink jet recording head for use in an ink jet recording



apparatus, wherein a layer of a polymer which is soluble in a solvent and contains fluorine bonded to substantially all the molecular ends is formed on the surface of a nozzle for jetting an ink.

5 In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a
10 remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high ink repellency and a high adhesion are separately required.

 The fluoropolymer represented by polyethylene
15 tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low,
20 but also the adhesion at the interface is remarkably low. Even though the polymer contains fluorine bonded to all the molecular ends, it can be made solvent-soluble through introduction of an ether or ester bond into the molecular chain. The coating of the polymer solution
25 enables a smooth surface free from a pinhole to be easily obtained, so that a thin film having a high strength can be formed. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for
30 the molecular weight to be increased prior to the formation of the film.


 An ink is a solution of an organic molecule as a dye dissolved in water or a colloid comprising a pigment (mainly a carbon black) dispersed in water. In a
35 conventional solvent-soluble fluoropolymer, since a hydrocarbon molecule portion is present, the dye molecule or pigment is deposited on the hydrocarbon molecule



portion, so that there occurs a deterioration in the water repellency. In a polymer wherein fluorine is bonded to all the molecular ends, the surface of the polymer is water-repellent and oil-repellent due to the exclusion effect of the site of fluorine, which enables the deposition of all the molecules to be prevented for a long period of time.

Example B1

"Teflon AF" (manufactured by E.I. du Pont de Nemours & Co.) was dissolved in a fluorocarbon solvent and spin-coated on the surface of a nozzle in a nozzle plate comprising a polysulfone resin.

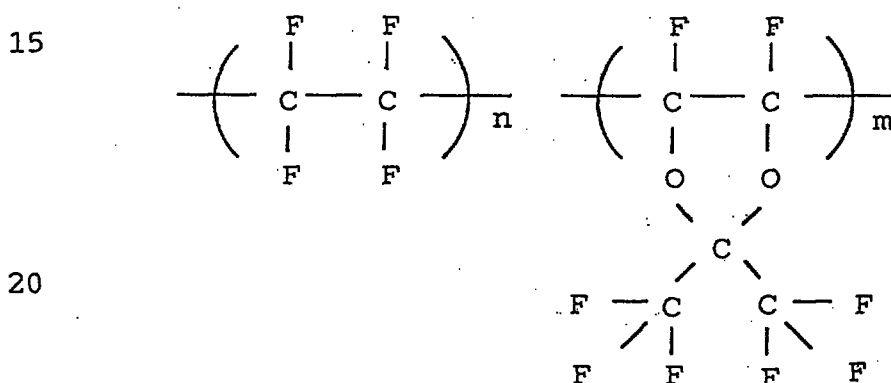

Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 0.3 % by weight was coated at 3000 rpm for one min, and the coating was dried at 80°C to form a 300 Å-thick polymer layer which is soluble in a solvent and contains fluorine bonded to substantially all the molecular ends. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency.

A first substrate of a polysulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and then bonded to each other at 80°C through a solvent cement of the same polysulfone resin dissolved in a solvent, thereby



assembling an ink jet recording head. The appearance of the vicinity of the cross section of the recording head is shown in Fig. 2. Numeral 21 designates a "Teflon AF" polymer layer formed by coating.

5 The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
10 the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing
15 test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially
20 no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example B2

"CYTOP" manufactured by Asahi Glass Co., Ltd. was
25 dissolved in a fluorinated liquid, and the solution was coated through dipping on the surface of a nozzle plate comprising nickel. The portions unnecessary to be rendered water-repellent were previously masked by taping, resist or the like. Although the concentration
30 of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 10 cm/min, and the coating was dried at 180°C to form a 0.1 μ m-thick polymer layer which is
35 soluble in a solvent and contains fluorine bonded to substantially all the molecular ends. The observation under a microscope has revealed that the formed thin film



was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency.

A first substrate of a polycarbonate resin and the nozzle plate subjected to a treatment for rendering it water-repellent and removal of the mask were washed and dried, and then bonded to each other with an adhesive, thereby assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example B3

"CYTOP" manufactured by Asahi Glass Co., Ltd. was dissolved in a fluorinated liquid, and the solution was spin-coated through dipping on the surface of a nozzle plate comprising a polyethersulfone. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 1 % by weight was coated at 2000 rpm for one min, and the coating was dried at 120°C to form a 500 Å-thick polymer layer which is soluble in a solvent and contains fluorine bonded to substantially all the molecular ends. The observation under a microscope has



revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency.

A first substrate of a polyethersulfone resin and
5 the nozzle plate subjected to a treatment for rendering
it water-repellent were washed and dried, and bonded to
each other through a solvent for the polyethersulfone
rein, thereby assembling an ink jet recording head. The
ink jet recording head thus produced was mounted on a
10 recording device, and a setting test was conducted. As a
result, neither omission of dot nor disturbance of
setting occurred. That is, it was confirmed that the
nozzle was successfully rendered water-repellent. Then,
the ink jet recording head was immersed in an ink at 70°C
15 for 5 days, and a setting test was conducted in the same
manner as that described above. The setting quality was
the same as the initial property. That is, the recording
head maintained a sufficient ink repellency. A rubbing
test was conducted through the use of a silicone rubber
20 while injecting a dye ink. As a result, the contact
angle of the recording head to water was 100° or more
after rubbing the recording head 5000 times. Thus, an
ink jet recording head which gives rise to substantially
no deterioration of the water repellency and can provide
25 a high setting quality for a long period of time could be
realized.

The present invention was described above with
reference to examples. Materials used in the ink jet
recording head and structures of the ink jet recording
30 head and the kind of the polymer layer soluble in a
solvent and containing fluorine bonded to substantially
all the molecular ends formed on the surface of the
nozzle may be varied and are not particularly limited.
Further, there is no particular limitation on the solvent
35 for the fluoropolymer and the coating method.

As described above, the present invention can
provide an ink jet recording head capable of providing a




high setting quality through an effective and homogeneous treatment for rendering the surface of the nozzle water-repellent. Further, the treatment for rendering a recording head water-repellent according to the present invention is excellent in the persistence of the water repellency which contributes to a prolongation of the service life of the recording head.

Embodiment C

In the ink jet recording head according to the embodiment C, a polymer layer comprising the following alternating polymer of a fluoroethylene with a hydrocarbon ethylene or its analogue is formed on the surface of a nozzle for jetting an ink.

15

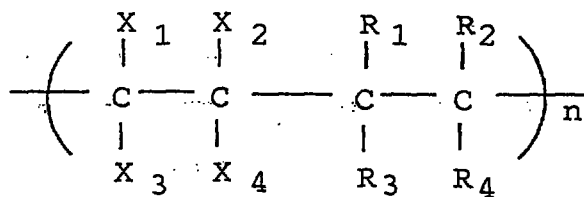

20

wherein X_1 to X_4 each stand for a fluorine or perfluoroalkyl group, and

R_1 to R_4 each stand for a hydrocarbon substituent (containing a hydrogen or a halogen).

25

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably 100° or more, the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force.

30

Further, in the treatment for rendering the surface of the nozzle water-repellent, a high ink repellency and a high adhesion are separately required.

35

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as




described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low. Since the alternating copolymer of a fluoroethylene with a hydrocarbon ethylene is soluble in a solvent, it is possible to easily form a smooth surface free from a pinhole through coating, which enables a thin film having a high strength to be formed. Further, since a hydrocarbon ethylene portion is evenly contained on a molecular level within the polymer, it is possible to attain a sufficient bonding strength between the polymer and the metal or resin constituting the nozzle. In order to attain a film strength or a bonding strength, it is indispensable for the molecular weight to be increased prior to the formation of the film.

An ink is a solution of a dye molecule having a molecular weight of several hundreds dissolved in water or a colloid comprising a pigment (mainly a carbon black) having a primary particle diameter of several hundreds Å dispersed in water. In the usually prepared random copolymer, since a polymer portion wherein several tens of units of a hydrocarbon ethylene free from fluorine continues is formed, a dye molecule or a pigment particle in the ink are deposited thereto, so that a water-repellent deterioration occurred. In the alternating copolymer of a fluoroethylene with a hydrocarbon ethylene, a fluoroethylene portion is equally contained on a molecule level within the polymer, a dye molecule having a molecular weight of several hundreds and a dye particle having a primary particle diameter of several hundreds Å cannot be deposited due to the exclusion effect of the site of fluorine. An alternating copolymer of a fluoroethylene with a hydrocarbon ethylene is ideal for the structure of the polymer. However, it is not always necessary that these monomers be alternately bonded, and there exists a portion wherein two or three units of fluoroethylene or hydrocarbon ethylene are

continuously bonded. In effect, even though the synthesis of an alternating copolymer is intended, an alternate copolymer having a complete molecular structure is not always formed.

5 Example C1

The following alternate copolymer of a diperfluoroalkyl fumarate with styrene was dissolved in a fluorocarbon solvent, and the solution was spin-coated on the surface of a nozzle in a nozzle plate comprising a
10 polysulfone resin.

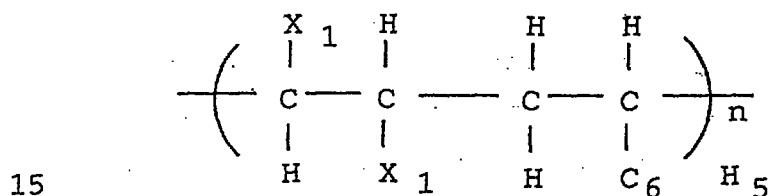

wherein X_1 stands for $\text{COOC}_m\text{F}_{2m+1}$ wherein m is 1 to 20. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a
20 solution having a concentration of 0.3 % by weight was coated at 3000 rpm for one min, and the coating was dried at 80°C to form a 300 Å-thick layer of an alternating polymer of diperfluoroalkyl fumarate with styrene. The observation under a microscope has revealed that the
25 formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency.


A first substrate of a polysulfone resin and the nozzle plate subjected to a treatment for rendering it
30 water-repellent were washed and dried, and then bonded to each other at 80°C through a solvent cement of the same polysulfone resin dissolved in a solvent, thereby assembling an ink jet recording head. The appearance of the vicinity of the cross section of the recording head
35 is shown in Fig. 2. Numeral 21 designates a polymer layer of an alternating polymer of diperfluoroalkyl fumarate with styrene formed by coating.



The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example C2

An alternating copolymer of ethylene trifluoride chloride with a vinyl ether was dissolved in a fluorinated liquid, and the solution was coated through dipping on the surface of a nozzle in a nozzle plate comprising nickel.

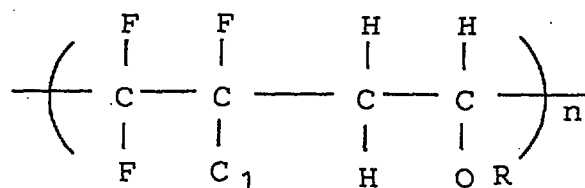

wherein R stands for an alkyl group.

The portions unnecessary to be rendered water-repellent were previously masked by taping, resist or the like. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 10 cm/min, and the coating was dried at 180°C to form a 0.1 μm-thick

high polymer of an alternating copolymer of ethylene trifluoride chloride with vinyl ether. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact
5 angle of 110° to water, that is, a high water repellency.

A first substrate of a polycarbonate resin and the nozzle plate subjected to a treatment for rendering it water-repellent and removal of the mask were washed and dried, and bonded to each other with an adhesive, thereby
10 assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was
15 successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head
20 maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet
25 recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example C3


30 An analogue of an alternating copolymer of ethylene tetrafluoride with a vinyl ester was dissolved in a trifluoromethylbenzene, and the solution was coated through dipping on the surface of a nozzle in a nozzle plate comprising a polyethersulfone resin.

35

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

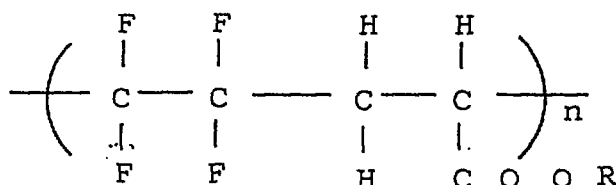

- 5 wherein R stands for an alkyl group. The control at the time of the synthesis of the polymer is not complete, and the alternating copolymer contains a portion where two to three units of vinyl ester are continuously bonded.
- 10 Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 1 % by weight was coated at 3000 rpm for one min, and the coating was dried at 120°C to form a 500 Å-thick high polymer layer of an
- 15 analogue of an alternating copolymer of tetrafluoroethylene with vinyl ester. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency.
- 20 A first substrate of a polyethersulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and then bonded to each other through a solvent for the polyether sulfone resin, thereby assembling an ink jet recording head. The
- 25 ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
- 30 the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing
- 35 test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an



ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

5 Reference Example

A random copolymer of vinylidene polyfluoride and a copolymer of ethylene tetrafluoride with vinyl ester was dissolved in a solvent, and the solution was coated on a nozzle plate comprising nickel or a polysulfone resin.

10 The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The films had a contact angle of 100° or more to water, that is, a high water repellency. The ink jet recording heads were immersed in an ink at 70°C for 5 days, and the

15 contact angle of the nozzle plates to water was measured again. As a result, the contact angle of the sample where a random copolymer of ethylene tetrafluoride with vinyl ester was coated was reduced to 50° or less. When a treatment for wiping off the ink was separately

20 conducted, the water-repellency was recovered, which suggested a deterioration of the water repellency attributable to a partial deposition of a dye molecule or a pigment particle in the ink. Further, a rubbing test was conducted through the use of a silicone rubber while

25 injecting a dye ink. As a result, the contact angle of the sample to water was lowered to 60° or less when the head was rubbed 2000 times with the silicone rubber. Although a treatment for rubbing off the ink was separately conducted, the water repellency was recovered,

30 which suggested that the high polymer layer was peeled off.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording

35 head and the kind of the fluoropolymer layer formed on the surface of the nozzle may be varied and are not particularly limited. Examples of the fluoroethylene



include ethylene tetrafluoride, ethylene trifluoride chloride, propylene hexafluoride, perfluorovinyl ether, perfluorovinyl ester and diperfluoroalkyl fumarate.

Examples of the hydrocarbon ethylene include vinyl
5 alcohol, vinyl ether, vinyl ester, vinyl chloride, styrene, dialkyl fumarate and methyl methacrylate. Further, there is no particular limitation on the solvent for the fluoropolymer and coating method.

Embodiment D

10 In the present embodiment, the process for producing an ink jet recording head having a fluoropolymer layer formed on the surface of a nozzle for jetting an ink comprises the steps of:

- a) preparing a solution of a fluoropolymer dissolved
15 in a solvent;
- b) coating said fluoropolymer on the whole surface of a nozzle plate by dipping;
- c) grinding the reverse surface of the nozzle plate to remove at least the fluoropolymer layer; and
- 20 d) bonding the nozzle plate to an ink jet recording head.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° ,
25 preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately
30 required from the viewpoint of practical use.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as
35 described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low.

In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for the molecular weight to be increased prior to the formation of the film.

In order to form a fluoropolymer layer also within a nozzle, it is necessary that after a fluoropolymer is dissolved in a solvent having a suitable vapor pressure to a relative low concentration, the solution be coated on a nozzle plate isolated as a part through dipping. Further, the nozzle plate cannot be bonded to an ink jet recording head without removing through grinding the fluoropolymer layer formed on the reverse surface of the nozzle plate. Further, when the reverse surface of the nozzle plate serves as an ink passage, the presence of the fluoropolymer polymer is detrimental to the discharge of bubbles formed within the ink and it becomes impossible to conduct a treatment for rendering the surface hydrophilic for preventing a lowering in the capability of discharging bubbles.

Example D1

Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.






Fig. 3 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent wherein (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising a polysulfone resin prior to the treatment and (b) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising a polysulfone resin through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 1 % by weight at a rate of 10 cm/min, and the coating was dried at 120°C to form a 0.1 μ m-thick polymer layer of "Teflon AF". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 3 (c) shows a state obtained when the reverse surface of the nozzle plate was ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #8000 comprising a diamond powder as a grinding agent, a load of 20 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. Since the control of the flatness of the surface is relatively easy, no fluoropolymer layer within the nozzle is not removed and the water repellency of the surface of the nozzle is maintained. In the polysulfone resin per se as well, the slightly ground surface 22 is a flat surface having a suitable surface roughness and has an improved wettability with an ink.



If necessary, it is also possible to conduct a treatment for rendering the surface hydrophilic. The nozzle plate subjected to a treatment for rendering the surface water-repellent and a first plate comprising a polysulfone resin were washed and dried, and a solvent was coated thereon. The nozzle plate and the first substrate were subjected to pressure bonding at temperature of 80°C to assemble an ink jet recording head. The reverse surface of the nozzle plate had an excellent flatness, a good working property and a large adhesion.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example D2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An



ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 5 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 5 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel prior to the treatment. Fig. 5 (b) shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising nickel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 3 % by weight at a rate of 3 cm/min, and the coating was dried at 180°C to form a 0.1 μ m-thick polymer layer of "CYTOP CTX". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact angle of 105° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 5 (c) shows a state obtained when the reverse surface of the nozzle plate was ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #2000 comprising a diamond powder as a grinding agent, a load of 100 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. Since the control of the flatness of the surface is relatively easy, no fluoropolymer layer within the nozzle is not removed and the water repellency of the surface of the nozzle is maintained. In the polysulfone resin per se as well, the slightly ground surface 22 is a flat surface having a suitable surface




roughness and has an improved adhesion to an adhesive. Fig. 5 (d) shows a state obtained when the nozzle plate subjected to the above-described treatment for rendering the surface water-repellent and a first substrate comprising a polycarbonate resin are washed, dried and then bonded to each other with an adhesive. It is apparent that a satisfactory bonding strength is obtained.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example D3

A high polymer of an ethylene tetrafluoride/vinyl ester copolymer was dissolved in a solvent having a suitable vapor pressure, and the solution was coated through dipping on a nozzle plate comprising a polyethersulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 20 cm/min, and the coating was dried at 120°C to form a 0.05 μ m-thick fluoropolymer layer. The



observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency. Further, it was confirmed that
5 the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Grinding was conducted through the use of a PVA (polyvinyl alcohol) grinding stone under suitable conditions to remove a fluoropolymer polymer formed on the reverse surface of
10 the nozzle plate.

A first substrate comprising a polycarbonate sulfone resin and the nozzle plate subjected to a surface treatment were washed and dried, and then bonded to each other through the use of a solvent comprising a
15 polyethersulfone resin to assemble an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was
20 confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the
25 initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing
30 the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

35 The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording



head and the kind of the fluoropolymer layer formed on the surface of the nozzle may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the
5 conditions for coating and grinding.

As described above, the present invention can provide an ink jet recording head capable of providing a high setting quality through a homogeneous treatment for rendering the surface and inside of the nozzle water-
10 repellent. Further, the treatment for rendering a recording head water-repellent according to the present invention is very excellent in the persistence of the water repellency, which contributes to a prolongation of the service life of the recording head.

15 Embodiment E

According to this embodiment, the process for producing an ink jet recording head having a fluoropolymer layer formed on the surface of a nozzle for jetting an ink comprises the steps of:

- 20 a) coating a positive-working resist on at least the reverse surface of a nozzle plate;
- b) irradiating the nozzle plate with an ionizing radiation from the surface side of the nozzle plate with the reverse surface side being light-shielded;
- 25 c) developing the irradiated surface and removing the resist from the surface of the nozzle plate and the inside of the nozzle;
- d) coating a solution of a fluoropolymer dissolved in a solvent on the whole surface of the nozzle plate by
30 dipping;
- e) removing the resist layer and the fluoropolymer layer on the reverse surface side of the nozzle plate by means of a resist peeling solution; and
- f) bonding the nozzle plate to an ink jet recording
35 head.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water



to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force.

- 5 Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

- The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat
10 resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low.
15 In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these materials can substantially maintain properties of the conventional fluoropolymers
20 and are soluble in a solvent, it is possible to easily obtain a smooth surface free from a pinhole through coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for
25 the molecular weight to be increased prior to the formation of the film.

- In order to homogeneously form a fluoropolymer layer also within a nozzle, it is necessary that after a fluoropolymer is dissolved in a solvent having a suitable
30 vapor pressure to a relative low concentration, the solution be coated on a nozzle plate isolated as a part through dipping. Further, the nozzle plate cannot be bonded to an ink jet recording head without removing through grinding the fluoropolymer layer formed on the
35 reverse surface of the nozzle plate. Further, when the reverse surface of the nozzle plate serves as an ink passage, the presence of the fluoropolymer polymer is



detrimental to the discharge of bubbles formed within the ink and it becomes impossible to conduct a treatment for rendering the surface hydrophilic for preventing a lowering in the capability of discharging bubbles.

5 The above object can be attained by forming a resist only on the reverse surface of the nozzle plate and removing the fluoropolymer layer together with the resist layer through the use of a resist peeling solution. The resist is usually patterned by exposure through a
10 photomask. This method is disadvantageous in that the alignment is troublesome, which is causative of a lowering in the yield. When use is made of an exposure method which comprises coating a positive-working resist on at least the reverse surface of the nozzle plate,
15 light-shielding the reverse surface of the plate and irradiating the nozzle plate from the surface thereof, patterning is automatically conducted and it becomes unnecessary to use the photomask.

Example E1

20 Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2
25 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.

30 Fig. 6 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 6 (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising a polysulfone resin prior to the treatment. Fig. 6 (b)
35 shows a state obtained when the reverse surface of the nozzle plate and the inside of the nozzle is spin-coated with a positive-working resist which is then prebaked to



form a resist layer 21. Fig. 6 (c) shows the step of irradiating the nozzle plate from the surface of the nozzle plate with the reverse surface being light-shielded by means of a light-shielding film 22 with a light from a mercury lamp. It is a matter of course that the nozzle plate may be sandwiched between two sheets of glass sheets. Fig. 6 (d) shows a state obtained when the exposed nozzle plate is developed, sufficiently rinsed and post-baked to leave the resist layer only on the reverse surface of the nozzle plate.

Fig. 6 (e) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated through dipping on the whole surface of a nozzle plate comprising a polysulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 1 % by weight at a rate of 10 cm/min, and the coating was dried at 120°C to form a 0.1 μ m-thick polymer layer of "Teflon AF". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Fig. 6 (f) shows a state obtained when the resist layer and fluoropolymer layer on the reverse surface of the nozzle plate are removed through the use of a resist peeling solution.

The fluoropolymer layer in the inside of the nozzle and on the surface of the nozzle plate were not removed, and the effect of the treatment for rendering the in the inside of the nozzle and on the surface of the nozzle plate water-repellent was maintained. A polysulfone resin was exposed on the reverse surface of the nozzle plate. If necessary, it is also possible to conduct a



treatment for rendering the surface hydrophilic. The nozzle plate subjected to a treatment for rendering the surface water-repellent and a first plate comprising a polysulfone resin were washed and dried, and a solvent
5 was coated thereon. The nozzle plate and the first substrate were bonded to each other through a solvent cement to assemble an ink jet recording head. The reverse surface of the nozzle plate had a good adhesion because it had not been subjected to the treatment for
10 rendering the surface water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the
15 nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the
20 recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus,
25 an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example E2

30 Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2
35 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An



ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 7 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 7 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel prior to the treatment. Fig. 7 (b) shows a state obtained when a positive-working resist is formed through dip coating on the whole surface of a nozzle including the inside of the nozzle and prebaked to form a resist layer 21. Fig. 7 (c) shows the step of irradiating the nozzle plate from the surface with the reverse surface being light-shielded by means of a metal plate 22 with a light from a mercury lamp. Fig. 7 (d) shows a state obtained when the exposed nozzle plate is developed with a developing solution, sufficiently rinsed and post-baked to leave the resist layer only on the reverse surface of the nozzle plate.

Fig. 7 (e) shows a state obtained when "CYTOP" (manufactured Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising nickel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.2 % by weight at a rate of 100 cm/min, and the coating was dried at 120°C to form a 0.05 μ m-thick polymer layer of "CYTOP CTX". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Fig. 7 (f) shows a state obtained when after the resist layer and fluoropolymer layer on the reverse surface of the nozzle plate are removed through the use of a resist peeling



solution, the nozzle plate and a first substrate comprising a polycarbonate resin are washed and dried and then bonded to each other with an adhesive. A satisfactory bonding strength could be obtained.

5 The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
10 the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A
15 rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to
20 substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example E3

A resist layer was left only on the reverse surface
25 of a nozzle plate comprising a stainless steel in the same manner as that of Example E2. A high polymer of an ethylene tetrafluoride/vinyl ester copolymer was dissolved in a solvent having a suitable vapor pressure, and the solution was coated on the nozzle plate through
30 dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 20 cm/min, and the coating was dried at 120°C to form a 0.02
35 μm -thick fluoropolymer layer. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact

angle of 100° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Further, the resist layer and
5 fluoropolymer layer on the reverse surface of the nozzle plate were removed with a resist peeling solution.

A first substrate comprising a polyethersulfone resin and the nozzle plate subjected to the surface treatment were washed and dried and then bonded to each
10 other by means of an adhesive tape. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was
15 successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording
20 head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an
25 ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.


The present invention was described above with
30 reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer and the positive-working layer may be varied and are not particularly limited. Further, there is no particular
35 limitation on the solvent for the fluoropolymer and the coating method.

Embodiment F

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



In the process according to the present embodiment, an ink jet recording head comprising a fluoropolymer layer formed on the surface of a nozzle for jetting an ink is produced by coating a fluoropolymer on the whole
5 surface of a nozzle plate through dipping, forming a protective layer at least within the nozzle, grinding the reverse surface of the nozzle plate to remove at least the fluoropolymer layer and removing the protective layer.

10 In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a
15 remarkably small inter-molecular cohesive force.

Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

The fluoropolymer represented by polyethylene
20 tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low,
25 but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties
30 of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is
35 indispensable for the molecular weight to be increased prior to the formation of the film.

In order to homogeneously form a fluoropolymer layer also within a nozzle, it is necessary that after a fluoropolymer is dissolved in a solvent having a suitable vapor pressure to a relative low concentration, the solution be coated on a nozzle plate isolated as a part through dipping. Further, the nozzle plate cannot be bonded to an ink jet recording head without removing through grinding the fluoropolymer layer formed on the reverse surface of the nozzle plate. Further, when the reverse surface of the nozzle plate serves as an ink passage, the presence of the fluoropolymer polymer is detrimental to the discharge of bubbles formed within the ink and it becomes impossible to conduct a treatment for rendering the surface hydrophilic for preventing a lowering in the capability of discharging bubbles.

In this connection, it is noted that, in the step of grinding, when the fluoropolymer layer is not protected, the fluoropolymer layer is flawed by an abrasive material or a fraction of the ground substrate, so that an ink droplet does not go straight, which unfavorably gives rise to an unacceptable setting quality. It is preferred for the protective layer to be formed on the surface of the nozzle and within the nozzle. However, it is very difficult to form another layer on a fluoropolymer layer having excellent water repellency and oil repellency according to a simple method. Since the nozzle comprises a thin pipe, a protective layer can be relatively easily formed within the nozzle. In the step of grinding, the protection of the surface of the nozzle is not always necessary when the surface of the nozzle is in close contact with a support and a protective layer is formed within the nozzle. When the protective layer comprises a high polymer soluble in a solvent which does not attack the fluoropolymer, it can be easily provided or removed and the water repellency of the fluoropolymer as well can be maintained.

Example F1

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.

Fig. 8 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 8 (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising a polysulfone resin prior to the treatment. Fig. 8 (b) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising a polysulfone resin through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 1 % by weight at a rate of 10 cm/min, and the coating was dried at 120°C to form a 0.1 μ m-thick polymer layer of "Teflon AF". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 8 (c) shows a state obtained when a photoresist having a high viscosity is coated through dipping and baked without exposure. Although no homogeneous coating could be conducted, a protective layer 22 was formed at least within the nozzle. The polysulfone resin, as such,

is attacked by a solvent for a photoresist. Since, however, a dense film comprising a fluoropolymer is formed, no deterioration occurred. Fig. 8 (d) shows a state obtained when the reverse surface of the nozzle plate is ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #8000 comprising a diamond powder as a grinding agent, a load of 20 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. The fluoropolymer layer and protective layer within the nozzle were not ground but maintained as they were. In the polysulfone resin per se as well, the slightly ground surface 23 is a flat surface having a suitable surface roughness and has an improved wettability with an ink. If necessary, it is also possible to conduct a treatment for rendering the surface hydrophilic. Fig. 8 (e) shows a state obtained when the nozzle plate is immersed in a water-based resist peeling solution and heated to remove the resist of the protective layer. A smooth fluoropolymer layer free from a flaw caused by grinding appeared on the surface of the nozzle.

The nozzle plate subjected to a treatment for rendering the surface water-repellent and a first plate comprising a polysulfone resin were washed and dried, and a solvent was coated thereon. The nozzle plate and the first substrate were bonded to each other through a solvent cement to assemble an ink jet recording head. The reverse surface of the nozzle plate had an excellent flatness, a good working property and a large adhesion.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at




70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example F2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Fig. 4 (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising nickel prior to the treatment. Fig. 4 (b) shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising nickel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.2 % by weight at a rate of 100 cm/min, and the coating was dried at 120°C to form a 0.05 μm-thick polymer layer of "CYTOP CTX". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact angle of 105° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 4 (c) shows a state obtained when an acrylic resin is dissolved in acetone and the solution is coated several times through dipping to form a coating which is



then dried. Although no homogeneous coating could be attained, a protective layer 22 was formed at least within the nozzle. Fig. 4 (d) shows a state obtained when the reverse surface of the nozzle plate is ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #2000 comprising a diamond powder as a grinding agent, a load of 100 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. The fluoropolymer layer and protective layer within the nozzle could be maintained as they were without being ground. In the nickel per se as well, the slightly ground surface 22 is a flat surface having a suitable surface roughness and has an improved adhesion to an adhesive. If necessary, it is also possible to conduct a treatment for rendering the surface hydrophilic. Fig. 4 (e) shows a state obtained when the nozzle plate is exposed to an ultrasonic wave and the acrylic resin as the protective layer is removed. A smooth fluoropolymer layer free from a flaw caused by grinding appeared on the surface of the nozzle.

Fig. 4 (f) shows a state obtained when the nozzle plate subjected to the above-described treatment and a first substrate comprising a polycarbonate resin washed and dried and then bonded to each other with an adhesive. A satisfactory bonding strength is obtained.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the

recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

10 Example F3

A high polymer of an ethylene tetrafluoride/vinyl ester copolymer was dissolved in a solvent having a suitable vapor pressure, and the solution was coated on a nozzle plate comprising stainless steel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 20 cm/min, and the coating was dried at 120°C to form a 0.02 μ m-thick fluoropolymer layer. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact angle of 100° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

PVA (polyvinyl alcohol) was dissolved in dioxane, and the coating was conducted. The resultant coating was then dried to form a protective layer at least within the nozzle. Further, grinding was conducted through the use of a PVA grinding stone under suitable conditions to remove a fluoropolymer polymer formed on the reverse surface of the nozzle plate. The nozzle plate was immersed in dioxane and, in this state, exposed to an ultrasonic wave to remove the protective layer comprising PVA.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED




A first substrate comprising a polyethersulfone resin and the nozzle plate subjected to the above-described surface treatment were washed and dried and then bonded to each other by means of an adhesive tape in the same manner as that of Example 2 to assemble an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer and protective layer formed on the surface of the nozzle may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the conditions for coating and grinding.

Embodiment G

In the process according to this embodiment, an ink jet recording head comprising a fluoropolymer layer formed on the surface of a nozzle for jetting an ink is



produced by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent and bringing the spread film into contact with the surface of a nozzle.

5 In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a
10 remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

 The fluoropolymer represented by polyethylene
15 tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low,
20 but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties
25 of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is
30 indispensable for the molecular weight to be increased prior to the formation of the film.

 When a solution of a fluoropolymer dissolved in a solvent is spread on the surface of water and the solvent is then evaporated, a water surface spread film of a
35 fluoropolymer is formed. The film thickness can be regulated by preparing a calibration curve and regulating the amount of dropping of the solution, the concentration



of the solution, etc. When the surface of a nozzle is brought into contact with the surface of water, the water surface spread film of a fluoropolymer is transferred to only a portion which has been brought into contact with the spread film but not transferred within the nozzle. Even in a failure in operation, the inner diameter of the nozzle is merely reduced by the film thickness of the water surface spread film, so that the water surface spread film enters the inside of the nozzle by the same distance as the inner diameter of the nozzle at the maximum. Ink repellency can be attained even when the thickness of the fluoropolymer film is as small as about 100 Å. Since the nozzle diameter is 100 µm or less, there occurs no problem in the practical use.

The water surface spread film of a fluoropolymer has a sufficient film strength. A sufficient film strength can be obtained by transferring a water surface spread film of a fluoropolymer on the surface of a nozzle and heat-treating the transferred film. If necessary, the transfer of the water surface spread film of a fluoropolymer on the surface of the nozzle can be repeated a plurality of times for the purpose of enhancing the ink repellency.

Example G1

Fig. 10 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 11 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 11 (a) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water. Although the concentration of the solution and the amount



of dropping of the solution can be suitably selected, in this example, a solution having a concentration of 0.05 % by weight was prepared, the amount of solution capable of forming a 0.1 μm -thick polymer layer of "Teflon AF" was
5 calculated, and the solution in the determined amount was dropped on the surface of water. Fig. 11 (b) shows a state obtained when the surface of a nozzle comprising an acrylic resin is brought into contact with the water surface spread film of a fluoropolymer formed by
10 evaporating the fluorocarbon solvent. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state.
15 Further, the nozzle may be submerged into the water to some extent. Fig. 11 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer a water surface spread film of a fluoropolymer to the surface of the nozzle.
20 Fig. 12 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 11 (c). When the surface of the nozzle was brought into contact with the surface of water, the water surface spread film of a fluoropolymer was transferred to the surface of the
25 nozzle only at a portion which had been brought into contact with the water surface spread film and the water surface spread film positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour,
30 and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to
35 no treatment for rendering it water-repellent.


The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted.



As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 3 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate. Fig. 13 is a typical cross-sectional views showing the steps of rendering the surface of a nozzle water-repellent. Fig. 13 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate 43 comprising nickel prior to the treatment. Fig. 13 (b) is shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, a 0.05 μm -thick water surface spread film 31 of a fluoropolymer formed on the surface of water is transferred on the



surface of a nozzle plate and the transferred film is heat-treated at 180°C for one hour. The observation of the thin film under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 108°C to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 13 (c) shows a state obtained when the nozzle plate subjected to the above-described surface treatment for rendering the surface of the nozzle water-repellent and a first substrate 52 comprising a polycarbonate resin are washed and dried and then bonded to each other with an adhesive 51.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G3

A high polymer of a diperfluoroalkyl fumarate/dialkyl fumarate copolymer was dissolved in a fluorocarbon solvent, and the solution was spread on the surface of water. The resultant water spread film of a

fluoropolymer having a thickness of 0.01 μm was transferred on the surface of a nozzle in the same manner as that of Example 1. The above step of transfer was additionally repeated twice, and the resultant film was
5 heat-treated at 120°C for one hour. The observation of the thin film under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that
10 the inside of the nozzle was subjected to substantially no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of
15 setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting
20 quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency.

A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a
25 result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period
30 of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer formed on
35 the surface of the nozzle may be varied and are not particularly limited.

Embodiment H

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



In the present embodiment, a LB film of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. The LB film is formed through the use of a polydiperfluoroalkyl fumarate or its copolymer as a
5 fluoropolymer.

In the process according to the present embodiment, a LB film is formed by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent, moving a barrier to form
10 a Langmuir film from the resultant spread film and forming a LB film of a fluoropolymer on the surface of a nozzle by a horizontal deposition method.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water
15 to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of
20 the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance.
25 It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer
30 with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be
35 easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is



indispensable for the molecular weight to be increased prior to the formation of the film.

Since the LB film of a fluoropolymer is a dense film on a molecular level, a very homogeneous water repellent effect can be attained even when the film thickness is small. The surface energy of the LB film of a fluoropolymer having a laminate structure of at least one layer is equal to that of a solid film, so that a more complete ink repellency can be obtained. However, in a usual polymer, since the molecular skeleton has a high degree of freedom, the molecule is in a random coil form. In this case, no LB film is formed, and even when coating was conducted thick, the strength of the resultant film is smaller than that of the LB film and the homogeneity is poor due to the occurrence of interstice. By contrast, when the fluoropolymer is a polydiperfluoroalkyl fumarate or its copolymer, the molecule takes a rigid rod form due to a great bulk of the side chain, which enables the LB film to be easily formed.

When a LB film is formed by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent, moving a barrier to form a Langmuir film from the resultant spread film and forming a LB film of a fluoropolymer on the surface of a nozzle by a horizontal deposition method, only a portion which has been brought into contact with the Langmuir film is rendered ink-repellent and the inside of the nozzle is subjected to no treatment. Even in a failure in operation, the inner diameter of the nozzle is merely reduced by the film thickness of the LB film, so that the LB film enters the inside of the nozzle by the same distance as the inner diameter of the nozzle at the maximum. The LB film of a fluoropolymer has a thickness of about 10 Å per layer, while the diameter of the nozzle is about several tens of μm , so that there occurs no problem in the practical use.




The LB film of a fluoropolymer has a sufficient film strength. Since the LB film is formed by a horizontal deposition method, no layer of water or the like is present between the surface of the nozzle and the LB film of a fluoropolymer, so that a satisfactory bonding strength can be obtained. If possible, it is preferred for the film to be heated to a temperature not below the glass transition temperature of the fluoropolymer.

Example H1

Fig. 10 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 14 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 14 (a) shows a state (224) obtained when a polydiperfluoroalkyl fumarate is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water.

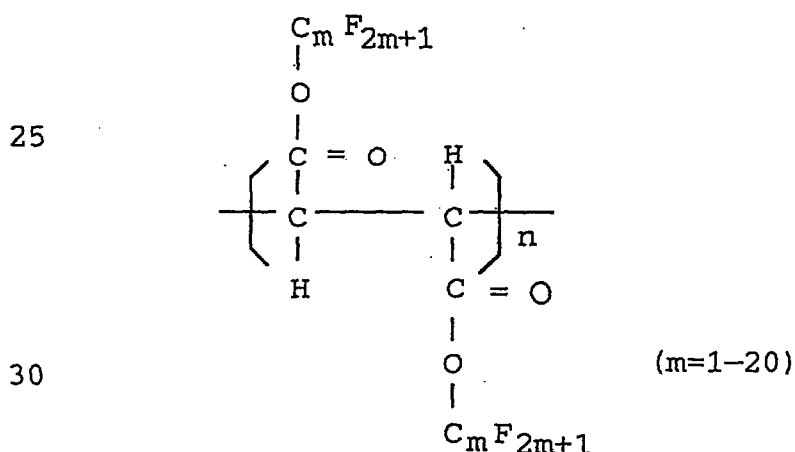

With respect to the concentration of the solution and the amount of dropping of solution, a preliminary experiment was conducted to prepare a π -A curve, the amount of the solution necessary for forming on the surface of water a monomolecular layer having an area of half of the area of



the surface of water was calculated, and the solution in the calculated amount was dropped on the surface of water. Fig. 14 (b) shows a state obtained when after evaporation of the fluorocarbon solvent, a barrier 223 is moved to form a Langmuir film 225 and the surface of a nozzle comprising an acrylic resin in an ink jet recording head 226 is brought into contact with the Langmuir film. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state. Further, the nozzle may be submerged into the water to some extent. Fig. 14 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer the LB film of a fluoropolymer to the surface of the nozzle.

Fig. 15 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 14 (c). When the surface of the nozzle was brought into contact with the surface of water, the LB film of a fluoropolymer 231 was transferred to the surface of the nozzle only at a portion which had been brought into contact with the LB film and the Langmuir film 225 positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour, and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at



70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example H2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 3 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 13 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 13 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel not subjected to the treatment. Fig. 13 (b) shows a state obtained when a high polymer of a polydiperfluoroalkyl fumarate/polydiisopropyl fumarate (4 : 1) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, the spread film is compressed to form a Langmuir film and a LB film having a three-layer structure is formed on the surface of a nozzle plate and the LB film is heat-treated at 180°C for one hour. The observation under a microscope has revealed that the formed thin film was very dense and



homogeneous. The film had a contact angle of 108° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 13

5 (c) shows a state obtained when the nozzle plate subjected to the above-described treatment for rendering the surface of the nozzle water-repellent and a first substrate comprising a polysulfone resin are washed and dried and then bonded to each other with an adhesive.

10 The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
15 the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A
20 rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to
25 substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example H3

A high polymer of a polydiperfluoroalkyl
30 fumarate/polyvinyl ester copolymer (9 : 1) was dissolved in a fluorocarbon solvent, the solution was spread on the surface of water, and the resultant film was compressed to form a Langmuir film which was then transferred to the surface of a nozzle in the same manner as that of Example
35 H1. The above step of transfer was repeated four times, and the transferred LB film was heat-treated at 120°C for one hour. The observation under a microscope has



revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to
5 no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the
10 nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is,
15 the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000
20 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Embodiment I

25 In the process according to the present embodiment, a coupling compound layer is formed on the surface of a nozzle prior to the formation of a water-repellent layer through transfer. A combination of the above-described transfer method with the formation of a coupling compound
30 layer makes it possible to form a water-repellent layer having an excellent adhesion and a large thickness.

Example I1

A coupling compound layer was formed on the surface of an ink jet recording head comprising glass, silicon,
35 polysulfone or polycarbonate.

γ -Aminopropyltriethoxysilane, N- β -aminomethyl- γ -aminopropyltrimethoxysilane, N-phenyl- γ -



aminopropyltrimethoxysilane, N- β -aminoethyl- γ -aminopropyltrimethoxysilane or N- β -aminoethyl- γ -aminopropylmethyldimethoxysilane was used as the coupling compound. A solvent capable of dissolving the coupling
5 compound, for example, methanol, ethanol or water, is used as the solvent. Although the concentration of the coupling compound can be arbitrarily selected, in the present example, the surface of a nozzle was immersed in a 0.2 wt.% solution and drying was conducted at a
10 temperature capable of evaporating the solvent to form a coupling layer.

Then, a fluoropolymer layer (a solution of "CYTOP" (manufactured by Asahi Glass Co., Ltd.) dissolved in a fluorocarbon organic solvent having a high boiling point
15 was formed on the surface of a coupling layer by a transfer method. Specifically, the solution was coated on an elastic body as a support having a smooth surface used in the transfer, such as a silicone rubber, a urethane rubber, a butyrene rubber, gelatin or a
20 chloroprene rubber, by spin coating or uniform pull-up immersion, and a nozzle plate was pressed against the coated surface while regulating the pressure.

Thereafter, this head was baked at a temperature not below the glass transition temperature, for example,
25 150°C, for the purpose of removing the solvent in the fluoropolymer layer and enhancing the fluidity to improve the coating property. The observation of the surface of the nozzle under a microscope has revealed that the formed thin film was very dense and homogeneous. The
30 film had a contact angle of 110° to water, that is, a high water repellency.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of
35 setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at



70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example I2

An ink jet recording head was produced in the same manner as that of Example I1, except that the amorphous fluororesin used in Example I1 was changed to "Teflon AF" (trade name) manufactured by De Pont (E.I.) de Nemours & Co. and the temperature of baking after coating was changed to 180°C.

Example I3

An ink jet recording head was produced in the same manner as that of Example I1, except that the amorphous fluororesin used in Example I1 was changed to "Teflon AF" (trade name) manufactured by De Pont (E.I.) de Nemours & Co. and the temperature of baking after coating was changed to 180°C.

Example I4

A head provided with a coupling layer and a water-repellent layer was produced in the same manner as that of Example I1, except that the surface of the nozzle was previously allowed to stand in oxygen plasma or ultraviolet irradiation atmosphere.

As with the head produced in Example 1, the head thus produced had a contact angle of 100° or more to water after rubbing the head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a

high setting quality for a long period of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer formed on the surface of a nozzle may be varied and are not particularly limited.

Industrial Applicability

The ink jet recording head of the present invention can be widely applied as a recording head to be mounted on an ink jet recording device such as an ink jet printer.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



CLAIMS

1. An ink jet recording head for use in an ink jet recording device, wherein a water-repellent layer
5 comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink.
2. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises a solvent-soluble fluoropolymer.
- 10 3. The ink jet recording head according to claim 2, wherein the solvent-soluble fluoropolymer has a fluorine atom in its substantially all the molecular ends.
4. The ink jet recording head according to claim 1, wherein the water-repellent layer is formed through a
15 coupling compound layer.
5. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises an alternating copolymer of a fluoroethylene with a hydrocarbon ethylene or its analogue or derivative.
- 20 6. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises a LB film of a fluoropolymer.
7. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises a fluoro
25 cyclic polymer.
8. A process for producing an ink jet recording head for use in an ink jet recording device, comprising subjecting the surface of a nozzle for jetting an ink of the ink jet recording head to a treatment for rendering
30 the surface of the nozzle water-repellent, characterized in that the process comprises the steps of:
preparing a polymer solution of a fluoropolymer dissolved in a solvent;
coating through dipping said polymer solution on the
35 whole surface of a nozzle plate provided with an ink jet hole to form a water-repellent layer comprising a

THIS SHEET HAS BEEN
REPLACED



fluoropolymer on the whole surface of the nozzle plate;
and

removing, through grinding, the water-repellent layer
on the reverse surface (the opposite side of a side from
5 which an ink is jetted) of the nozzle plate in the water-
repellent layer formed on each surface of the nozzle
plate.

9. The process according to claim 8, which further
comprises, after forming the water-repellent layer on the
10 whole surface of the nozzle plate, forming a protective
layer on at least the inside or vicinity of the jet hole
of the nozzle, removing through grinding the water-
repellent layer on the reverse surface (the opposite side
of a side from which an ink is jetted) of the nozzle
15 plate in the water-repellent layer formed on each surface
of the nozzle plate and removing said protective layer.

10. A process for producing an ink jet recording
head for use in an ink jet recording device, comprising
subjecting the surface of a nozzle for jetting an ink of
20 the ink jet recording head to a treatment for rendering
the surface of the nozzle water-repellent, characterized
in that the process comprises the steps of:

coating a positive-working resist on at least the
reverse surface (the opposite side of a side from which
25 an ink is jetted) of a nozzle plate provided with an ink
jet hole;

irradiating the nozzle plate with an ionizing
radiation from the surface side of the nozzle plate with
the reverse surface side being light-shielded;

30 developing the irradiated surface and removing the
resist from the surface of the nozzle plate and the
inside of the nozzle hole;

coating through dipping a polymer solution
containing a fluoropolymer dissolved therein on the whole
35 surface of the nozzle plate to form a water-repellent
layer comprising a fluoropolymer on the whole surface of
the nozzle plate; and





removing the resist layer and the water-repellent layer on the reverse surface side of the nozzle plate to form a water-repellent layer on only the surface side of the nozzle plate and the internal surface of the nozzle
5 hole.

11. A process for producing an ink jet recording head for use in an ink jet recording device, comprising subjecting the surface of a nozzle for jetting an ink of the ink jet recording head to a treatment for rendering
10 the surface of the nozzle water-repellent, characterized in that the process comprises the steps of:

forming a polymer layer comprising a polymer solution containing a fluoropolymer dissolved therein on the surface of a transfer medium; and
15 transferring the polymer layer formed on the transfer medium to a predetermined portion of the surface of the nozzle provided with an ink jet hole.

12. The process according to claim 11, wherein the transfer of the polymer layer is conducted at least once
20 by spreading the polymer solution containing a fluoropolymer dissolved therein on the surface of water, evaporating a solvent contained in the polymer solution and bringing the spread film into contact with the surface of the nozzle.

13. The process according to claim 12, wherein after the transfer of the polymer layer, the transferred polymer layer is heat-treated.

14. The process according to claim 11, which further comprises spreading the polymer solution
30 containing a fluoropolymer dissolved therein on the surface of water, evaporating the solvent, moving a barrier to form a Langmuir film from the resultant spread film and bringing the resultant Langmuir film into contact with the surface of the nozzle to form a LB film
35 comprising at least one layer of a fluoropolymer on the surface of the nozzle.



15. The process according to claim 11, wherein prior to the transfer of the polymer layer, a coupling layer is formed on the surface of the nozzle.

16. The process according to claim 11, wherein the surface of the transfer medium is smooth.

17. The process according to claim 11, wherein the coupling compound layer is formed by immersing a nozzle in a coupling solution comprising a coupling compound and a solvent.

18. The process according to claim 11, wherein after exposure of the nozzle to an ozone atmosphere, the coupling layer is formed and the water-repellent layer is then formed.

19. The process according to claim 11, wherein after exposure of the nozzle to an ozone atmosphere, the water-repellent layer is formed through transfer.

This Sheet Has Been Replaced



* C L M S *

THIS SHEET HAS BEEN
REPLACED

ABSTRACT

The present invention provides an ink jet recording head for use in an ink jet recording device, wherein a water-repellent layer (21) comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. This water-repellent layer can be formed as a dense, homogeneous layer through the use of a solvent-soluble fluoropolymer, which enables an ink jet recording head excellent in the water-repellent property, the persistence of the water repellency and the durability.

15

20

This Sheet Has Been Replaced

25



30

35

THIS SHEET HAS BEEN
REPLACED



1/9

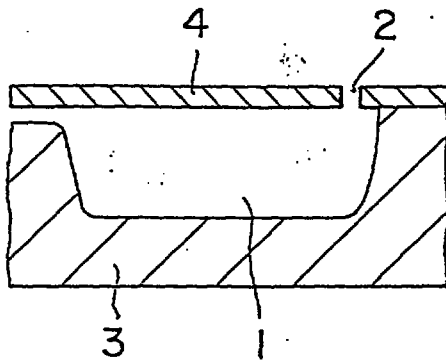


FIG. 1

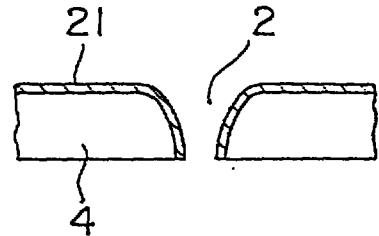
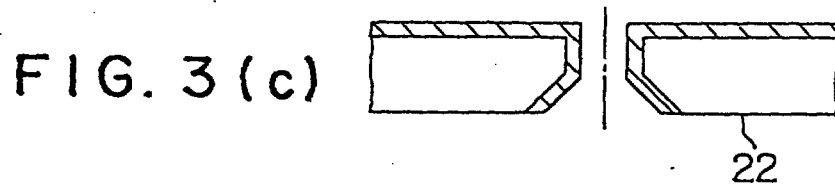

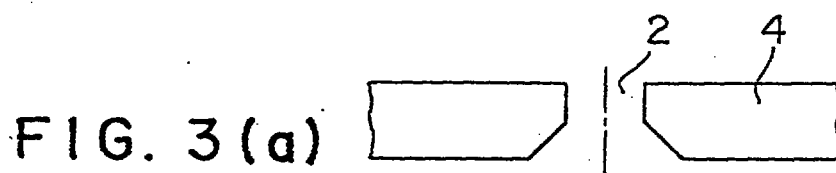


FIG. 2








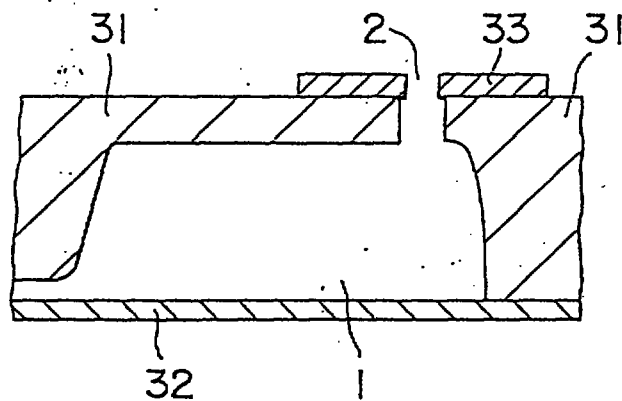


FIG. 4

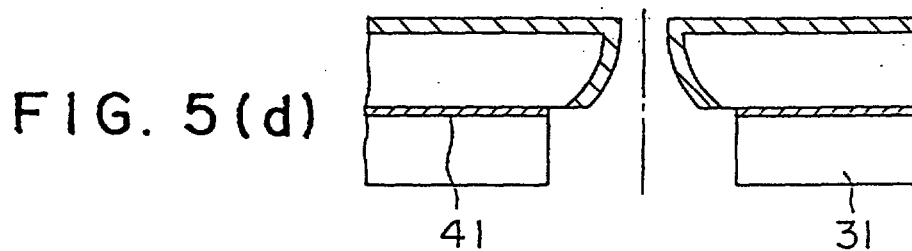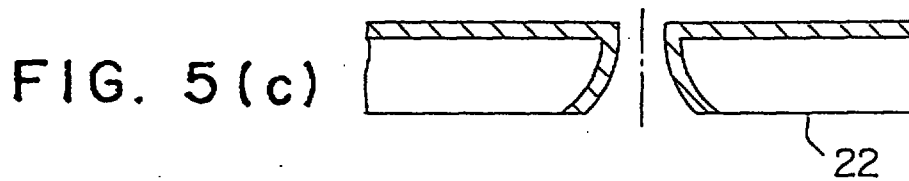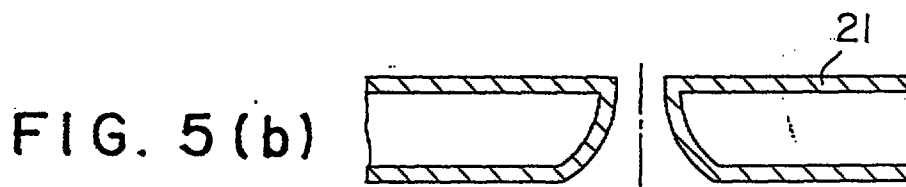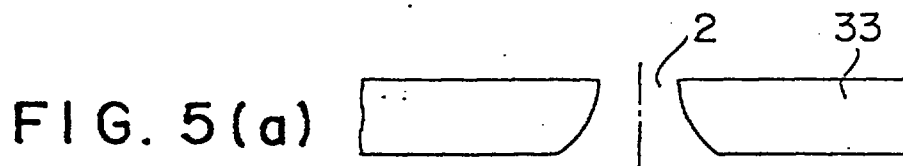



3/9

FIG. 6(a)

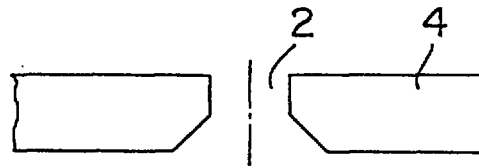


FIG. 6(b)

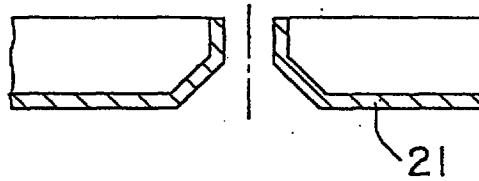


FIG. 6(c)

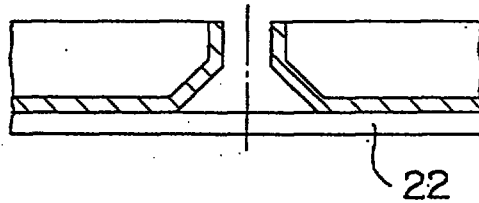


FIG. 6(d)



FIG. 6(e)

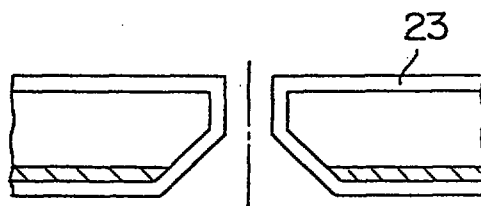


FIG. 6(f)






FIG. 7(a)

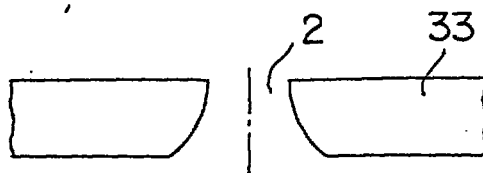


FIG. 7(b)

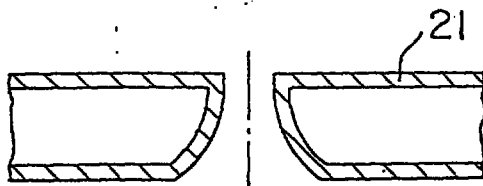


FIG. 7(c)

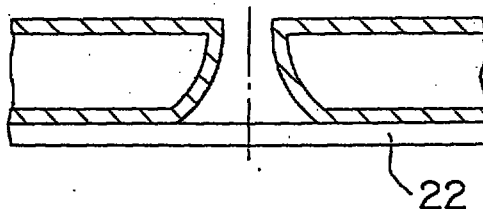


FIG. 7(d)




FIG. 7(e)


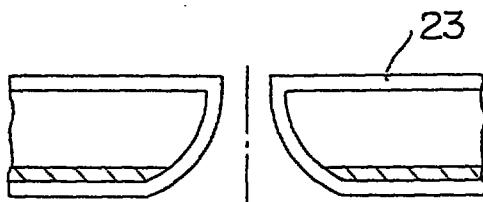


FIG. 7(f)



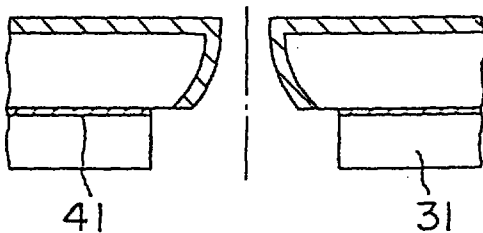

6/9

FIG. 9(a)

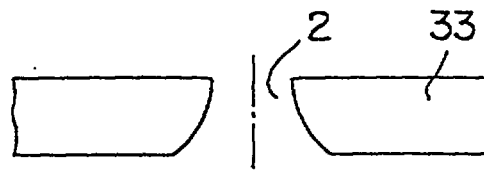


FIG. 9(b)

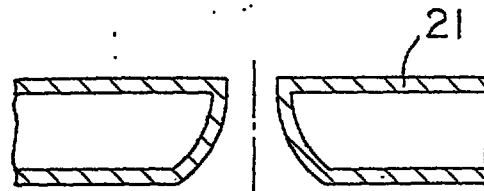


FIG. 9(c)

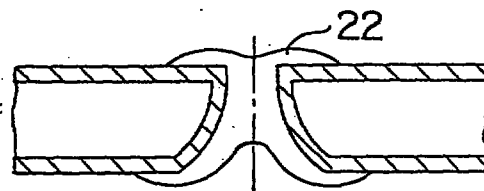


FIG. 9(d)

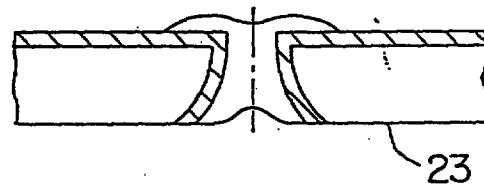


FIG. 9(e)


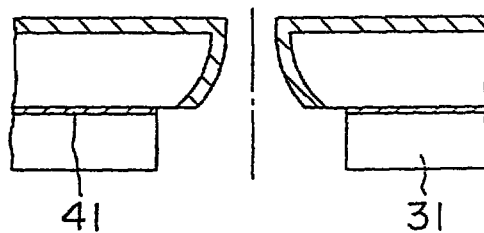


FIG. 9(f)



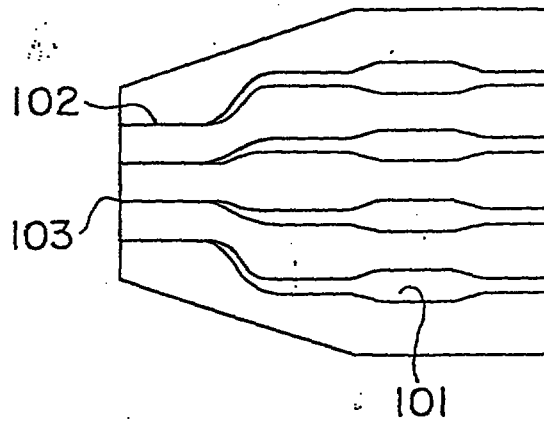



FIG. 10

FIG. 11 (a)

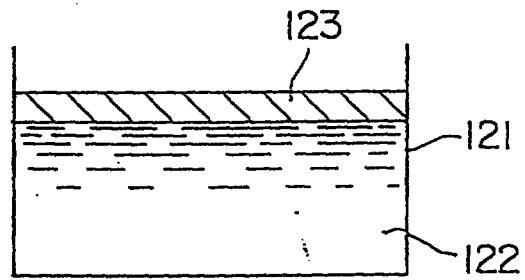


FIG. 11 (b)

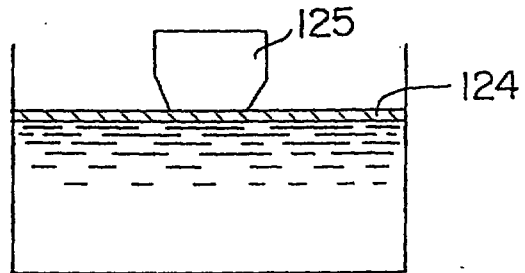
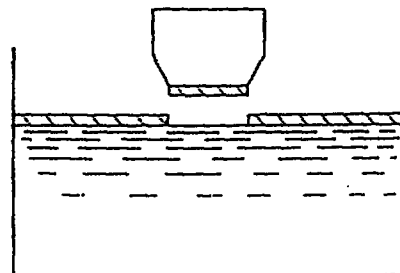


FIG. 11 (c)



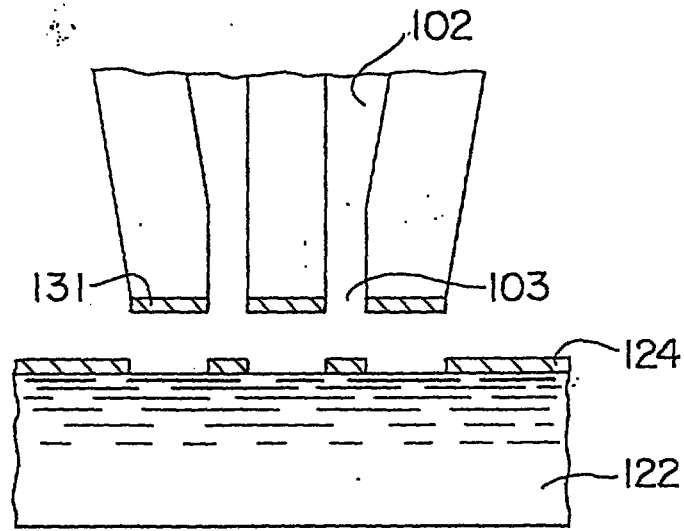



FIG. 12

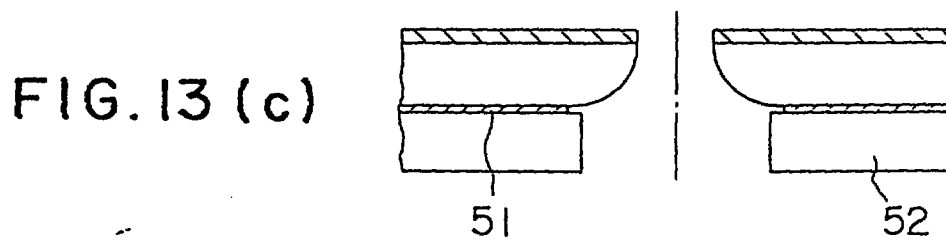
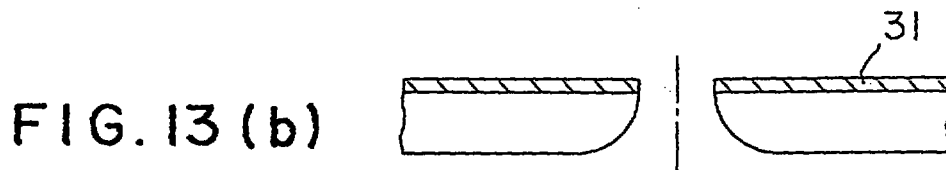
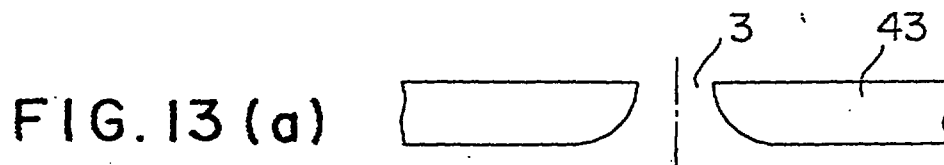




FIG. 14(a)

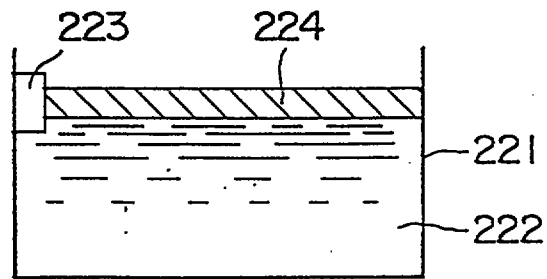


FIG. 14(b)

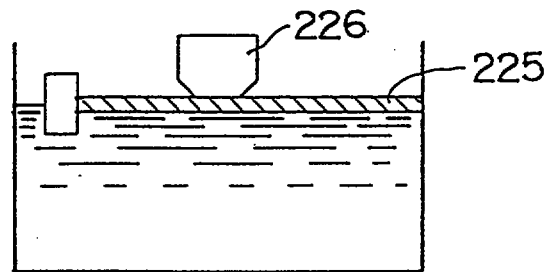


FIG. 14(c)


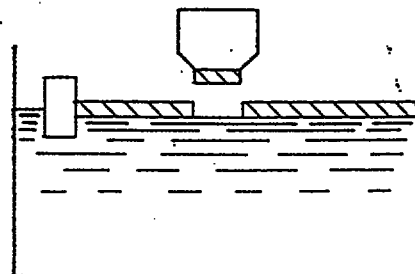


FIG. 15



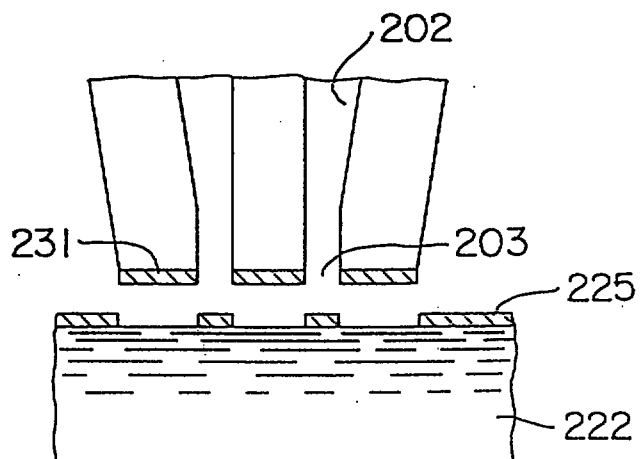

13 MAR 1997

DESCRIPTION

INK JET RECORDING HEAD AND PROCESS FOR
PRODUCING THE SAME

5

Technical Field

The present invention relates to an ink jet recording head having an excellent water repellency for use in an ink jet recording device and a process for producing the same.

10

Background Art

A material such as glass, a metal or a resin is used for an ink jet recording head.

In the use of a water-based ink in an ink jet recording head, when the water repellency of the surface of a nozzle is unsatisfactory, droplets of an ink are liable to adhere to the surface of the nozzle, which spoils the rectilinearity of jetted ink droplets, so that it often becomes impossible to conduct recording due to occurrence of troubles such as disturbance of setting.

20


For this reason, the surface of a nozzle which is a portion for jetting an ink has hitherto been subjected to a treatment for rendering the surface of the nozzle water-repellent. For example, a proposal has been made on a method wherein a particle of a water-repellent material is deposited on the surface of a nozzle, for example, by electrostatic powder coating (see Japanese Patent Application Laid-Open No. 157765/1982) and vacuum deposition and plasma polymerization (see Japanese Patent Application Laid-Open Nos. 183161/1985 and 176059/1984) to render the surface of the nozzle water-repellent.

30

In the above-described conventional treatment for rendering the surface of the nozzle water-repellent, it is not always easy to form a smooth repellent surface free from any defect such as a pinhole. This causes properties to be varied from product to product, and the properties to change with the elapse of time. Further, in the electrostatic powder coating, the baking

35

13 MAR 1997



temperature should be 300°C or above. In the case of a metal, the dimensional accuracy is spoiled, and it is impossible to apply this method to a resin. When use is made of vacuum deposition, a large device should be used
5 and it is difficult to conduct the process control. Further, in this method, since the bonding strength is insufficient, only a product having an insufficient bonding strength can be obtained.

The present invention can solve the above-described
10 problem, and an object of the present invention is to provide an ink jet recording head which is excellent in the water repellency of the surface of the nozzle, the persistence of the water repellency and the durability and enables a high printing quality to be maintained for
15 a long period of time, and a process for producing the same.

Disclosure of the Invention

The above-described object can be attained by an ink jet recording head for use in an ink jet recording
20 device, wherein a water-repellent layer comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. The ink jet recording head having an excellent water-repellent property can be produced by forming the above-described
25 water-repellent layer comprising a fluoropolymer on the surface of a nozzle for jetting a nozzle by coating or transfer through the use of a solvent-soluble fluoropolymer solution.

In the treatment for rendering the surface of the
30 nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90°, preferably at least 100°, the polarizability is so small that it is useful to introduce fluorine having a remarkably small inter-molecular cohesive force.
35 Although a fluoropolymer represented by polytetrafluoroethylene has excellent features such as heat resistance, chemical resistance and weather

13 MAR 1997



resistance, it is insoluble in a solvent, so that only powder coating can be applied to the fluoropolymer. This makes it possible to attain a good water-repellent property.

5

Brief Description of Drawings

Figs. 1 and 4 are schematic cross-sectional views of ink jet recording heads according to embodiments of the present invention;

Fig. 2 is a partially enlarged cross-sectional view
10 of an ink jet nozzle;

Fig. 3, Figs. 5 to 9 and Fig. 13 are typical cross-sectional views showing the steps of rendering the surface of a nozzle water-repellent;

Fig. 10 is a schematic cross-sectional view of an
15 ink jet recording head according to an embodiment of the present invention;

Figs. 11 and 12 are explanatory views showing a process for forming a water-repellent layer according to a water surface spreading method; and

20 Figs. 14 and 15 are explanatory views showing a process for forming a water-repellent layer according to a LB film forming method.

Best Mode for Carrying Out the Invention

Embodiments of the present invention will now be
25 described.

The ink jet recording head according to the present invention is mounted on an ink jet recording device and characterized in that a water-repellent layer comprising a homogeneous layer of a fluoropolymer is formed on the
30 surface of a nozzle for jetting an ink.

The above-described water-repellent layer is formed through the use of a solvent-soluble fluoropolymer. The solvent-soluble fluoropolymer is preferably amorphous. Specific preferred examples of the solvent-soluble
35 fluoropolymer include polydiperfluoroalkyl fumarate, Teflon AF (trademark, De Pont (E.I.) de Nemours & Co), solvent-soluble fluoropolymers such as CYTOP (trademark,

13 MAR 1997



Asahi Glass Co., Ltd.) and alternating copolymers of fluoroethylenes with hydrocarbon ethylenes such as an alternating copolymer of diperfluoroalkyl fumarate with styrene, an alternating copolymer of ethylene trifluoride chloride with a vinyl ether and an alternating copolymer of ethylene tetrafluoride with a vinyl ester, and their analogues and derivatives.

Preferred examples of the solvent include fluorinated liquids include Fluorinert (trademark, 3M Co.), Garden (trademark, Montefluos), trifluoromethylbenzene and hydrochlorofluorocarbon.

The concentration of the fluoropolymer in the fluoropolymer solution is preferably 0.01 to 7 % by weight, still preferably 0.1 to 5 % by weight.


Since the above-described fluoropolymer is solvent-soluble, it is possible to form a water-repellent layer through the use of the fluoropolymer in a solution form according to a coating method or a transfer method. The water-repellent layer thus formed comprises a dense, homogeneous film comprising a homogeneous layer or continuous layer of a fluoropolymer, and it is believed that such a film structure contributes to a remarkable improvement in the water-repellent property and the persistence of the effect of water repellency.

In the present invention, it is also possible to form a water-repellent layer through a coupling compound layer for the purpose of further improving the adhesion between the water repellent layer and the surface of the nozzle.

A further feature of the present invention is that the water-repellent layer can be formed by simple and rapid methods, for example, a coating method such as dipping and a transfer method which will be described later.

Specifically, the process for producing an ink jet recording head according to the present invention comprises subjecting the surface of a nozzle for jetting

13 MAR 1997



an ink of an ink jet recording head to a treatment for rendering the surface of the nozzle water-repellent, characterized in that the process comprises the steps of: preparing a polymer solution of a fluoropolymer dissolved in a solvent; coating through dipping said polymer solution on the whole surface of a nozzle plate provided with an ink jet hole to form a water-repellent layer comprising a fluoropolymer on the whole surface of the nozzle plate; and removing through grinding the water-repellent layer on the reverse surface (the opposite side of a side from which an ink is jetted) of the nozzle plate in the water-repellent layer formed on each surface of the nozzle plate.

According to another embodiment of the process of the present invention, the process may further comprise, after forming the water-repellent layer on the whole surface of the nozzle plate, forming a protective layer on only at least the inside or vicinity of the jet hole of the nozzle, removing through grinding the water-repellent layer on the reverse surface (the opposite side of a side from which an ink is jetted) of the nozzle plate in the water-repellent layer formed on each surface of the nozzle plate and removing said protective layer.

According to another aspect of the present invention, there is provided a process for producing an ink jet recording head, comprising subjecting the surface of a nozzle for jetting an ink of an ink jet recording head to a treatment for rendering the surface of the nozzle water-repellent, characterized in that the process comprises the steps of: coating a positive-working resist on at least the reverse surface (the opposite side of a side from which an ink is jetted) of a nozzle plate provided with an ink jet hole; irradiating the nozzle plate with an ionizing radiation from the surface side of the nozzle plate with the reverse surface side being light-shielded; developing the irradiated surface and removing the resist from the surface of the nozzle plate

13 MAR 1997



and the inside of the nozzle hole; coating through dipping a polymer solution containing a fluoropolymer dissolved therein on the whole surface of the nozzle plate to form a water-repellent layer comprising a
5 fluoropolymer on the whole surface of the nozzle plate; and removing the resist layer and the water-repellent layer on the reverse surface side of the nozzle plate to form a water-repellent layer on only the surface side of the nozzle plate and the internal surface of the nozzle
10 hole.


When use is made of transfer, the process for producing an ink jet recording head according to the present invention comprises subjecting the surface of a nozzle for jetting an ink of the ink jet recording head
15 to a treatment for rendering the surface of the nozzle water-repellent, characterized in that the process comprises the steps of: forming a polymer layer comprising a polymer solution containing a fluoropolymer dissolved therein on the surface of a transfer medium;
20 and transferring the polymer layer formed on the transfer medium to a predetermined portion of the surface of the nozzle provided with an ink jet hole. When the transfer is conducted a plurality of times, the denseness can be increased, so that a film having a desired thickness can
25 be formed.

In the above-described process wherein use is made of transfer, it is possible to use a water surface spreading method which comprises spreading a polymer solution containing a fluoropolymer dissolved therein on
30 the surface of water, evaporating a solvent contained in the polymer solution and bringing the spread film into contact with the surface of a nozzle. When the transfer of the water surface spread film is conducted a plurality of times, a film having a desired thickness can be
35 formed.

In the process wherein use is made of transfer, a more homogeneous and dense water-repellent layer can be

13 MAR 1997

This Sheet Has Been Replaced



7

formed by conducting a drying and heating treatment after the transfer of the polymer layer.

Further, in the present invention, it is possible to use a method for forming a LB film on the surface of a nozzle which comprises spreading a polymer solution containing a fluoropolymer dissolved therein on the surface of water, evaporating the solvent, moving a barrier to form a Langmuir film from the resultant spread film and bringing the resultant Langmuir film into contact with the surface of the nozzle.

In the above-described LB film, at least one layer may be laminated to a desired thickness. A more homogeneous and dense water-repellent layer can be formed by conducting a heat treatment after the transfer of the LB film.

In the transfer method, when an elastic body, such as rubber, is used as a transfer medium, in order to form a good water-repellent film, it is important to bring the surface of the transfer medium to a smooth state. The treatment of the surface of the head according to the transfer method is disclosed in Japanese Patent Application Laid-Open No. 48953/1990. This method is characterized in that use is made of a transfer medium comprising a porous material. The present inventors, however, have found that although the method wherein the transfer is conducted through the use of a porous transfer medium is excellent in the transfer efficiency, it is not always useful for forming a homogeneous, dense water-repellent layer having an excellent water-repellent property contemplated in the present invention and, as described above, the method wherein the surface of the transfer medium is brought to a smooth state is useful for this purpose. As described above, when the surface of the transfer medium (support) is brought to a smooth state, the peelability of the polymer layer from the transfer medium unexpectedly becomes so good that the polymer layer can be made thick and homogeneous.

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



Prior to the transfer of the polymer layer, a coupling compound layer can be formed on the surface of the nozzle, and a combination of the transfer method with the formation of the coupling compound layer enables a water-repellent layer having an excellent adhesion and a large thickness to be formed. Methods of rendering the surface of the nozzle water-repellent including a method of forming a coupling compound layer will now be described.

10 At the outset, the nozzle plate is immersed in a coupling solution comprising a coupling compound and a solvent and then in a solvent. The immersion of the nozzle plate in a solvent advantageously has the effect of making the thickness of coating of the coupling
15 compound uniform to further stabilize the adhesion between the water-repellent layer and the surface of the nozzle plate.

Water and alcohols, such as methanol and ethanol, can be used as the solvent for the coupling solution.
20 When water is used as the solvent, the handleability becomes better. Further, since the surface tension is so large that it is possible to prevent the coupling compound from penetrating into the hole in the nozzle.

Then, the coupling coating layer is dried, and a water-repellent layer is transferred thereon. In the transfer method, an elastic body having a specular surface, for example, a silicone rubber, a urethane rubber, a butyrene rubber, gelatin or a chloroprene rubber is used as the transfer medium. The above-
25 described fluoropolymer solution is coated on the surface of the transfer medium by spin coating or uniform pull-up immersion, and a nozzle plate is pressed against the coated surface to transfer the polymer layer to the surface of the nozzle plate.

35 The transferred polymer layer is then baked. It is preferred to conduct the baking at a temperature not below the glass transition point of the polymer. The

13 MAR 1997

baking enables the volatile solvent contained in the polymer layer to be completely removed. Further, the present inventors have found that the heating of the transferred polymer layer to a temperature not below the glass transition point of the polymer leads to an increase in the fluidity of the polymer layer which improves the coating property and further contributes to an improvement in the adhesion.

Further, in the above-described method, the following procedure may be used. After exposure of the surface of the nozzle plate to an ozone atmosphere, a coupling layer is formed, and a water-repellent layer is then formed. Alternatively, after the formation of the coupling layer, the surface of the coupling layer may be exposed to an ozone atmosphere followed by the formation of a water-repellent layer. The surface cleaning treatment wherein use is made of ozone removes stains on the surface, which contributes to a further improvement in the adhesion of the formed layer. The ozone atmosphere can be formed by irradiation with oxygen plasma or ultraviolet rays.

The present invention will now be described in more detail with reference to the following embodiments.

Embodiment A

Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.

Example A1

A polydiperfluoroalkyl fumarate was dissolved in a fluorocarbon solvent, and the solution was spin-coated on



13 MAR 1997

the surface of a nozzle in a nozzle plate comprising a polysulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 0.3
5 % by weight was coated at 3000 rpm for one min, and the coating was dried at 80°C to form a polydiperfluoroalkyl fumarate layer having a thickness of 300 Å. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The
10 film had a contact angle of 115° to water, that is, a high water repellency.

A first substrate of a polysulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and bonded to each
15 other at 80°C through a solvent cement of the same polysulfone resin dissolved in a solvent, thereby assembling an ink jet recording head. The appearance of the vicinity of the cross section of the recording head is shown in Fig. 2. Numeral 21 designates a
20 fluoropolymer layer formed by coating.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the
25 nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording
30 head maintained a sufficient ink resistance. A rubbing test was conducted through the use of a silicone rubber. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives
35 rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

Example A2

A solvent-soluble fluoropolymer (CYTOP manufactured by Asahi Glass Co., Ltd.) was dissolved in a fluorinated liquid, and the solution was coated through dipping on the surface of a nozzle plate comprising nickel. The portions unnecessary to be rendered water-repellent were previously masked by taping, resist or the like.


A first substrate of a polycarbonate resin and the nozzle plate subjected to a treatment for rendering it water-repellent and removal of the mask were washed and dried, and then bonded to each other, thereby assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink resistance. A rubbing test was conducted through the use of a silicone rubber. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

30 Example A3

A fluoroethylene/vinyl ether copolymer was dissolved in trifluoromethylbenzene, and the solution was spin-coated on the surface of a nozzle plate comprising a polyethersulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 1 % by weight was coated at 3000 rpm for



13 MAR 1997



one min, and the coating was dried at 120°C to form a fluoroethylene/vinyl ether copolymer layer having a thickness of 500 Å. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency.

A substrate of a polyethersulfone resin and the nozzle plate subjected to the surface treatment were washed and dried, and bonded to each other, thereby assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink resistance. A rubbing test was conducted through the use of a silicone rubber. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer formed on the surface of the nozzle may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the coating method.

As described above, the present invention can provide an ink jet recording head capable of providing a

13 MAR 1997



high setting quality through an effective and homogeneous treatment for rendering the surface of the nozzle water-repellent. Further, the treatment for rendering a recording head water-repellent according to the present invention is very excellent in the persistence of the water repellency, which contributes to a prolongation of the service life of the recording head.

Further, in the process for producing an ink jet recording head, since the treatment for rendering the recording head water-repellent can be conducted through the use of a very simple apparatus and step, the production can be safely conducted and the cost can be remarkably reduced, which renders the effect of the present invention large.

Embodiment B


In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these materials can substantially maintain properties of the conventional fluoropolymers and are soluble in a solvent, it is possible to easily obtain a smooth surface free from a pinhole through coating. However, the present inventors have found that when a hydrocarbon molecule site is present in the fluoropolymer, a water-repellent deterioration is liable to occur due to a partial deposition of a dye molecule contained in the ink.

The present invention has been made with a view to solving the above-described problem, and an object of the present invention is to provide an ink jet recording head wherein the surface of the nozzle in the ink jet recording head has a high water repellency and is excellent in the persistence of the effect of water repellency and a high setting quality can be provided for a long period of time.

The above-described object can be attained by an ink jet recording head for use in an ink jet recording

12 MAR 1997

This Sheet Has Been Replaced



apparatus, wherein a layer of a polymer which is soluble in a solvent and contains fluorine bonded to substantially all the molecular ends is formed on the surface of a nozzle for jetting an ink.

5 In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a
10 remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high ink repellency and a high adhesion are separately required.

The fluoropolymer represented by polyethylene
15 tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low,
20 but also the adhesion at the interface is remarkably low. Even though the polymer contains fluorine bonded to all the molecular ends, it can be made solvent-soluble through introduction of an ether or ester bond into the molecular chain. The coating of the polymer solution
25 enables a smooth surface free from a pinhole to be easily obtained, so that a thin film having a high strength can be formed. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for
30 the molecular weight to be increased prior to the formation of the film.

An ink is a solution of an organic molecule as a dye dissolved in water or a colloid comprising a pigment (mainly a carbon black) dispersed in water. In a
35 conventional solvent-soluble fluoropolymer, since a hydrocarbon molecule portion is present, the dye molecule or pigment is deposited on the hydrocarbon molecule

THIS SHEET HAS BEEN
REPLACED

12 MAR 1997

This Sheet Has Been Replaced




15

portion, so that there occurs a deterioration in the water repellency. In a polymer wherein fluorine is bonded to all the molecular ends, the surface of the polymer is water-repellent and oil-repellent due to the exclusion effect of the site of fluorine, which enables the deposition of all the molecules to be prevented for a long period of time.

Example B1

"Teflon AF" (manufactured by E.I. du Pont de Nemours & Co.) was dissolved in a fluorocarbon solvent and spin-coated on the surface of a nozzle in a nozzle plate comprising a polysulfone resin.

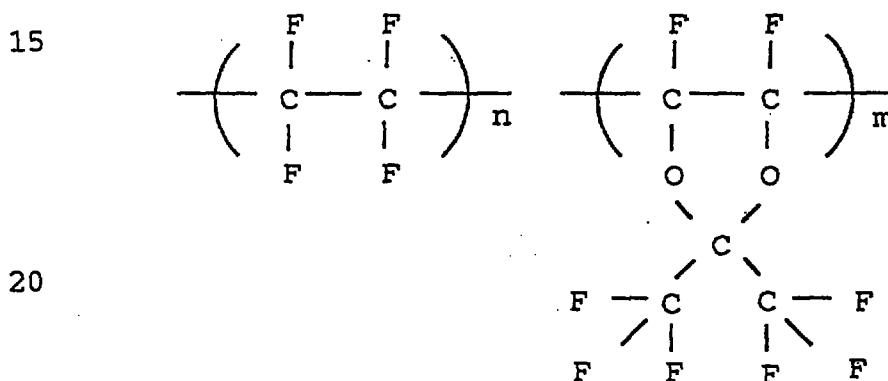

Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 0.3 % by weight was coated at 3000 rpm for one min, and the coating was dried at 80°C to form a 300 Å-thick polymer layer which is soluble in a solvent and contains fluorine bonded to substantially all the molecular ends. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency.

A first substrate of a polysulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and then bonded to each other at 80°C through a solvent cement of the same polysulfone resin dissolved in a solvent, thereby

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



assembling an ink jet recording head. The appearance of the vicinity of the cross section of the recording head is shown in Fig. 2. Numeral 21 designates a "Teflon AF" polymer layer formed by coating.

5 The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
10 the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing
15 test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially
20 no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example B2

"CYTOP" manufactured by Asahi Glass Co., Ltd. was
25 dissolved in a fluorinated liquid, and the solution was coated through dipping on the surface of a nozzle plate comprising nickel. The portions unnecessary to be rendered water-repellent were previously masked by
taping, resist or the like. Although the concentration
30 of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 10 cm/min, and the coating was dried at
180°C to form a 0.1 μ m-thick polymer layer which is
35 soluble in a solvent and contains fluorine bonded to substantially all the molecular ends. The observation under a microscope has revealed that the formed thin film

REPLACEMENT SHEET

13 MAR 1997

This Sheet Has Been Replaced



17

was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency.

A first substrate of a polycarbonate resin and the nozzle plate subjected to a treatment for rendering it water-repellent and removal of the mask were washed and dried, and then bonded to each other with an adhesive, thereby assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.


Example B3

"CYTOP" manufactured by Asahi Glass Co., Ltd. was dissolved in a fluorinated liquid, and the solution was spin-coated through dipping on the surface of a nozzle plate comprising a polyethersulfone. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 1 % by weight was coated at 2000 rpm for one min, and the coating was dried at 120°C to form a 500 Å-thick polymer layer which is soluble in a solvent and contains fluorine bonded to substantially all the molecular ends. The observation under a microscope has

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

This Sheet Has Been Replaced



revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency.

A first substrate of a polyethersulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and bonded to each other through a solvent for the polyethersulfone resin, thereby assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.


The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the polymer layer soluble in a solvent and containing fluorine bonded to substantially all the molecular ends formed on the surface of the nozzle may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the coating method.

As described above, the present invention can provide an ink jet recording head capable of providing a

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

This Sheet Has Been Replaced




19

high setting quality through an effective and homogeneous treatment for rendering the surface of the nozzle water-repellent. Further, the treatment for rendering a recording head water-repellent according to the present invention is excellent in the persistence of the water repellency which contributes to a prolongation of the service life of the recording head.

Embodiment C

In the ink jet recording head according to the embodiment C, a polymer layer comprising the following alternating polymer of a fluoroethylene with a hydrocarbon ethylene or its analogue is formed on the surface of a nozzle for jetting an ink.

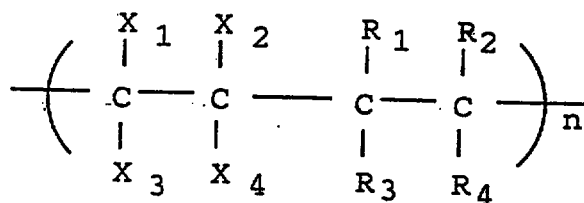

wherein X_1 to X_4 each stand for a fluorine or perfluoroalkyl group, and

R_1 to R_4 each stand for a hydrocarbon substituent (containing a hydrogen or a halogen).

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably 100° or more, the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force.


Further, in the treatment for rendering the surface of the nozzle water-repellent, a high ink repellency and a high adhesion are separately required.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

This Sheet Has Been Replaced



20

described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low. Since the alternating copolymer of a fluoroethylene with a hydrocarbon ethylene is soluble in a solvent, it is possible to easily form a smooth surface free from a pinhole through coating, which enables a thin film having a high strength to be formed. Further, since a hydrocarbon ethylene portion is evenly contained on a molecular level within the polymer, it is possible to attain a sufficient bonding strength between the polymer and the metal or resin constituting the nozzle. In order to attain a film strength or a bonding strength, it is indispensable for the molecular weight to be increased prior to the formation of the film.

An ink is a solution of a dye molecule having a molecular weight of several hundreds dissolved in water or a colloid comprising a pigment (mainly a carbon black) having a primary particle diameter of several hundreds Å dispersed in water. In the usually prepared random copolymer, since a polymer portion wherein several tens of units of a hydrocarbon ethylene free from fluorine continues is formed, a dye molecule or a pigment particle in the ink are deposited thereto, so that a water-repellent deterioration occurred. In the alternating copolymer of a fluoroethylene with a hydrocarbon ethylene, a fluoroethylene portion is equally contained on a molecule level within the polymer, a dye molecule having a molecular weight of several hundreds and a dye particle having a primary particle diameter of several hundreds Å cannot be deposited due to the exclusion effect of the site of fluorine. An alternating copolymer of a fluoroethylene with a hydrocarbon ethylene is ideal for the structure of the polymer. However, it is not always necessary that these monomers be alternately bonded, and there exists a portion wherein two or three units of fluoroethylene or hydrocarbon ethylene are


THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

continuously bonded. In effect, even though the synthesis of an alternating copolymer is intended, an alternate copolymer having a complete molecular structure is not always formed.

5 Example C1


The following alternate copolymer of a diperfluoroalkyl fumarate with styrene was dissolved in a fluorocarbon solvent, and the solution was spin-coated on the surface of a nozzle in a nozzle plate comprising a polysulfone resin.

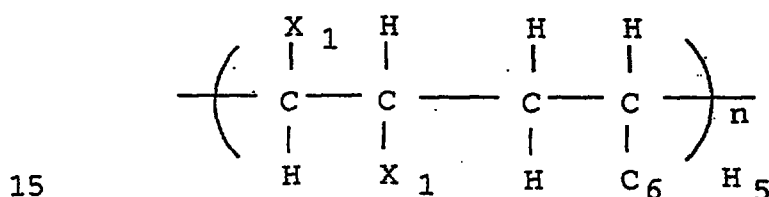

wherein X_1 stands for $\text{COOC}_m\text{F}_{2m+1}$ wherein m is 1 to 20. Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 0.3 % by weight was coated at 3000 rpm for one min, and the coating was dried at 80°C to form a 300 Å-thick layer of an alternating polymer of diperfluoroalkyl fumarate with styrene. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency.


A first substrate of a polysulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and then bonded to each other at 80°C through a solvent cement of the same polysulfone resin dissolved in a solvent, thereby assembling an ink jet recording head. The appearance of the vicinity of the cross section of the recording head is shown in Fig. 2. Numeral 21 designates a polymer layer of an alternating polymer of diperfluoroalkyl fumarate with styrene formed by coating.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997


This Sheet Has Been Replaced



The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example C2

An alternating copolymer of ethylene trifluoride chloride with a vinyl ether was dissolved in a fluorinated liquid, and the solution was coated through dipping on the surface of a nozzle in a nozzle plate comprising nickel.

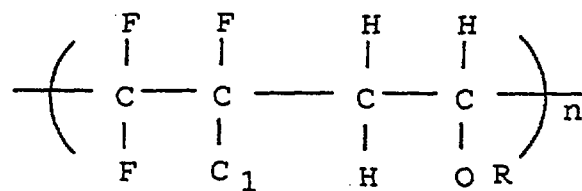

30

wherein R stands for an alkyl group.

The portions unnecessary to be rendered water-repellent were previously masked by taping, resist or the like. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 10 cm/min, and the coating was dried at 180°C to form a 0.1 μm-thick

THIS SHEET HAS BEEN
REPLACED

18 MAR 1987

23

high polymer of an alternating copolymer of ethylene trifluoride chloride with vinyl ether. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact
5 angle of 110° to water, that is, a high water repellency.

A first substrate of a polycarbonate resin and the nozzle plate subjected to a treatment for rendering it water-repellent and removal of the mask were washed and dried, and bonded to each other with an adhesive, thereby
10 assembling an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was
15 successfully rendered water-repellent. Then, the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head
20 maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet
25 recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example C3

30 An analogue of an alternating copolymer of ethylene tetrafluoride with a vinyl ester was dissolved in a trifluoromethylbenzene, and the solution was coated through dipping on the surface of a nozzle in a nozzle plate comprising a polyethersulfone resin.

35


This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

24

This Sheet Has Been Replaced

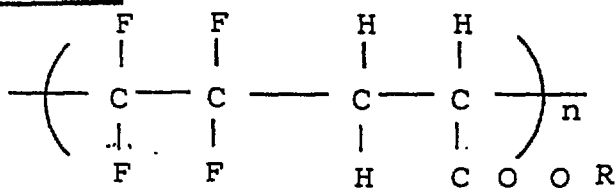

5

wherein R stands for an alkyl group. The control at the time of the synthesis of the polymer is not complete, and the alternating copolymer contains a portion where two to three units of vinyl ester are continuously bonded.

10 Although the concentration of the solution and the film thickness can be suitably selected, in this example, a solution having a concentration of 1 % by weight was coated at 3000 rpm for one min, and the coating was dried at 120°C to form a 500 Å-thick high polymer layer of an
15 analogue of an alternating copolymer of tetrafluoroethylene with vinyl ester. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency.

20 A first substrate of a polyethersulfone resin and the nozzle plate subjected to a treatment for rendering it water-repellent were washed and dried, and then bonded to each other through a solvent for the polyether sulfone resin, thereby assembling an ink jet recording head. The
25 ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
30 the ink jet recording head was immersed in an ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing
35 test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

5 Reference Example

A random copolymer of vinylidene polyfluoride and a copolymer of ethylene tetrafluoride with vinyl ester was dissolved in a solvent, and the solution was coated on a nozzle plate comprising nickel or a polysulfone resin.

10 The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The films had a contact angle of 100° or more to water, that is, a high water repellency. The ink jet recording heads were immersed in an ink at 70°C for 5 days, and the

15 contact angle of the nozzle plates to water was measured again. As a result, the contact angle of the sample where a random copolymer of ethylene tetrafluoride with vinyl ester was coated was reduced to 50° or less. When a treatment for wiping off the ink was separately

20 conducted, the water-repellency was recovered, which suggested a deterioration of the water repellency attributable to a partial deposition of a dye molecule or a pigment particle in the ink. Further, a rubbing test was conducted through the use of a silicone rubber while

25 injecting a dye ink. As a result, the contact angle of the sample to water was lowered to 60° or less when the head was rubbed 2000 times with the silicone rubber. Although a treatment for rubbing off the ink was separately conducted, the water repellency was recovered,

30 which suggested that the high polymer layer was peeled off.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording

35 head and the kind of the fluoropolymer layer formed on the surface of the nozzle may be varied and are not particularly limited. Examples of the fluoroethylene

13 MAR 1997



include ethylene tetrafluoride, ethylene trifluoride chloride, propylene hexafluoride, perfluorovinyl ether, perfluorovinyl ester and diperfluoroalkyl fumarate.

Examples of the hydrocarbon ethylene include vinyl
5 alcohol, vinyl ether, vinyl ester, vinyl chloride, styrene, dialkyl fumarate and methyl methacrylate. Further, there is no particular limitation on the solvent for the fluoropolymer and coating method.

Embodiment D

10 In the present embodiment, the process for producing an ink jet recording head having a fluoropolymer layer formed on the surface of a nozzle for jetting an ink comprises the steps of:

a) preparing a solution of a fluoropolymer dissolved
15 in a solvent;

b) coating said fluoropolymer on the whole surface of a nozzle plate by dipping;

c) grinding the reverse surface of the nozzle plate to remove at least the fluoropolymer layer; and

20 d) bonding the nozzle plate to an ink jet recording head.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° ,
25 preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately
30 required from the viewpoint of practical use.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as
35 described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low.

13 MAR 1997

In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for the molecular weight to be increased prior to the formation of the film.

In order to form a fluoropolymer layer also within a nozzle, it is necessary that after a fluoropolymer is dissolved in a solvent having a suitable vapor pressure to a relative low concentration, the solution be coated on a nozzle plate isolated as a part through dipping. Further, the nozzle plate cannot be bonded to an ink jet recording head without removing through grinding the fluoropolymer layer formed on the reverse surface of the nozzle plate. Further, when the reverse surface of the nozzle plate serves as an ink passage, the presence of the fluoropolymer polymer is detrimental to the discharge of bubbles formed within the ink and it becomes impossible to conduct a treatment for rendering the surface hydrophilic for preventing a lowering in the capability of discharging bubbles.

Example D1

Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.

This Sheet Has Been ReplacedTHIS SHEET HAS BEEN
REPLACED


13 MAR 1997



Fig. 3 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent wherein (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising a polysulfone resin prior to the treatment and (b) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising a polysulfone resin through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 1 % by weight at a rate of 10 cm/min, and the coating was dried at 120°C to form a 0.1 μm -thick polymer layer of "Teflon AF". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 3 (c) shows a state obtained when the reverse surface of the nozzle plate was ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #8000 comprising a diamond powder as a grinding agent, a load of 20 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. Since the control of the flatness of the surface is relatively easy, no fluoropolymer layer within the nozzle is not removed and the water repellency of the surface of the nozzle is maintained. In the polysulfone resin per se as well, the slightly ground surface 22 is a flat surface having a suitable surface roughness and has an improved wettability with an ink.

13 MAR 1997



If necessary, it is also possible to conduct a treatment for rendering the surface hydrophilic. The nozzle plate subjected to a treatment for rendering the surface water-repellent and a first plate comprising a polysulfone resin were washed and dried, and a solvent was coated thereon. The nozzle plate and the first substrate were subjected to pressure bonding at temperature of 80°C to assemble an ink jet recording head. The reverse surface of the nozzle plate had an excellent flatness, a good working property and a large adhesion.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example D2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An

13 MAR 1997

This Sheet Has Been Replaced



30

ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 5 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 5 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel prior to the treatment. Fig. 5 (b) shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising nickel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 3 % by weight at a rate of 3 cm/min, and the coating was dried at 180°C to form a 0.1 μ m-thick polymer layer of "CYTOP CTX". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact angle of 105° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 5 (c) shows a state obtained when the reverse surface of the nozzle plate was ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #2000 comprising a diamond powder as a grinding agent, a load of 100 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. Since the control of the flatness of the surface is relatively easy, no fluoropolymer layer within the nozzle is not removed and the water repellency of the surface of the nozzle is maintained. In the polysulfone resin per se as well, the slightly ground surface 22 is a flat surface having a suitable surface

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

roughness and has an improved adhesion to an adhesive. Fig. 5 (d) shows a state obtained when the nozzle plate subjected to the above-described treatment for rendering the surface water-repellent and a first substrate comprising a polycarbonate resin are washed, dried and then bonded to each other with an adhesive. It is apparent that a satisfactory bonding strength is obtained.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example D3

A high polymer of an ethylene tetrafluoride/vinyl ester copolymer was dissolved in a solvent having a suitable vapor pressure, and the solution was coated through dipping on a nozzle plate comprising a polyethersulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 20 cm/min, and the coating was dried at 120°C to form a 0.05 μm -thick fluoropolymer layer. The



13 MAR 1997

observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency. Further, it was confirmed that

5 the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Grinding was conducted through the use of a PVA (polyvinyl alcohol) grinding stone under suitable conditions to remove a fluoropolymer polymer formed on the reverse surface of

10 the nozzle plate.

A first substrate comprising a polycarbonate sulfone resin and the nozzle plate subjected to a surface treatment were washed and dried, and then bonded to each other through the use of a solvent comprising a

15 polyethersulfone resin to assemble an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was

20 confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the

25 initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing

30 the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

35 The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording



13 MAR 1997



head and the kind of the fluoropolymer layer formed on the surface of the nozzle may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the conditions for coating and grinding.


As described above, the present invention can provide an ink jet recording head capable of providing a high setting quality through a homogeneous treatment for rendering the surface and inside of the nozzle water-repellent. Further, the treatment for rendering a recording head water-repellent according to the present invention is very excellent in the persistence of the water repellency, which contributes to a prolongation of the service life of the recording head.

Embodiment E

According to this embodiment, the process for producing an ink jet recording head having a fluoropolymer layer formed on the surface of a nozzle for jetting an ink comprises the steps of:

- a) coating a positive-working resist on at least the reverse surface of a nozzle plate;
- b) irradiating the nozzle plate with an ionizing radiation from the surface side of the nozzle plate with the reverse surface side being light-shielded;
- c) developing the irradiated surface and removing the resist from the surface of the nozzle plate and the inside of the nozzle;
- d) coating a solution of a fluoropolymer dissolved in a solvent on the whole surface of the nozzle plate by dipping;
- e) removing the resist layer and the fluoropolymer layer on the reverse surface side of the nozzle plate by means of a resist peeling solution; and
- f) bonding the nozzle plate to an ink jet recording head.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water

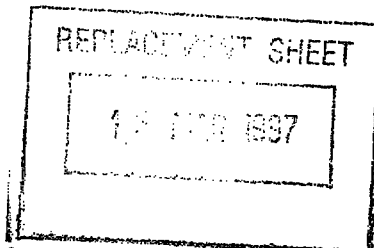

to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force.

- 5 Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat
10 resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low.
15 In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these materials can substantially maintain properties of the conventional fluoropolymers
20 and are soluble in a solvent, it is possible to easily obtain a smooth surface free from a pinhole through coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for
25 the molecular weight to be increased prior to the formation of the film.

In order to homogeneously form a fluoropolymer layer also within a nozzle, it is necessary that after a fluoropolymer is dissolved in a solvent having a suitable
30 vapor pressure to a relative low concentration, the solution be coated on a nozzle plate isolated as a part through dipping. Further, the nozzle plate cannot be bonded to an ink jet recording head without removing through grinding the fluoropolymer layer formed on the
35 reverse surface of the nozzle plate. Further, when the reverse surface of the nozzle plate serves as an ink passage, the presence of the fluoropolymer polymer is



13 MAR 1997

detrimental to the discharge of bubbles formed within the ink and it becomes impossible to conduct a treatment for rendering the surface hydrophilic for preventing a lowering in the capability of discharging bubbles.

- 5 The above object can be attained by forming a resist only on the reverse surface of the nozzle plate and removing the fluoropolymer layer together with the resist layer through the use of a resist peeling solution. The resist is usually patterned by exposure through a
- 10 photomask. This method is disadvantageous in that the alignment is troublesome, which is causative of a lowering in the yield. When use is made of an exposure method which comprises coating a positive-working resist on at least the reverse surface of the nozzle plate,
- 15 light-shielding the reverse surface of the plate and irradiating the nozzle plate from the surface thereof, patterning is automatically conducted and it becomes unnecessary to use the photomask.


Example E1

- 20 Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2
- 25 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.

- 30 Fig. 6 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 6 (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising a polysulfone resin prior to the treatment. Fig. 6 (b)
- 35 shows a state obtained when the reverse surface of the nozzle plate and the inside of the nozzle is spin-coated with a positive-working resist which is then prebaked to



13 MAR 1997



form a resist layer 21. Fig. 6 (c) shows the step of irradiating the nozzle plate from the surface of the nozzle plate with the reverse surface being light-shielded by means of a light-shielding film 22 with a light from a mercury lamp. It is a matter of course that the nozzle plate may be sandwiched between two sheets of glass sheets. Fig. 6 (d) shows a state obtained when the exposed nozzle plate is developed, sufficiently rinsed and post-baked to leave the resist layer only on the reverse surface of the nozzle plate.

Fig. 6 (e) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated through dipping on the whole surface of a nozzle plate comprising a polysulfone resin. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 1 % by weight at a rate of 10 cm/min, and the coating was dried at 120°C to form a 0.1 μ m-thick polymer layer of "Teflon AF". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Fig. 6 (f) shows a state obtained when the resist layer and fluoropolymer layer on the reverse surface of the nozzle plate are removed through the use of a resist peeling solution.

The fluoropolymer layer in the inside of the nozzle and on the surface of the nozzle plate were not removed, and the effect of the treatment for rendering the in the inside of the nozzle and on the surface of the nozzle plate water-repellent was maintained. A polysulfone resin was exposed on the reverse surface of the nozzle plate. If necessary, it is also possible to conduct a

REPLACEMENT SHEET

13 MAR 1997

37

This Sheet Has Been Replaced



treatment for rendering the surface hydrophilic. The nozzle plate subjected to a treatment for rendering the surface water-repellent and a first plate comprising a polysulfone resin were washed and dried, and a solvent
5 was coated thereon. The nozzle plate and the first substrate were bonded to each other through a solvent cement to assemble an ink jet recording head. The reverse surface of the nozzle plate had a good adhesion because it had not been subjected to the treatment for
10 rendering the surface water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the
15 nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the
20 recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus,
25 an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example E2

30 Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2
35 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 7 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 7 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel prior to the treatment. Fig. 7 (b) shows a state obtained when a positive-working resist is formed through dip coating on the whole surface of a nozzle including the inside of the nozzle and prebaked to form a resist layer 21. Fig. 7 (c) shows the step of irradiating the nozzle plate from the surface with the reverse surface being light-shielded by means of a metal plate 22 with a light from a mercury lamp. Fig. 7 (d) shows a state obtained when the exposed nozzle plate is developed with a developing solution, sufficiently rinsed and post-baked to leave the resist layer only on the reverse surface of the nozzle plate.

Fig. 7 (e) shows a state obtained when "CYTOP" (manufactured Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising nickel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.2 % by weight at a rate of 100 cm/min, and the coating was dried at 120°C to form a 0.05 μm -thick polymer layer of "CYTOP CTX". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Fig. 7 (f) shows a state obtained when after the resist layer and fluoropolymer layer on the reverse surface of the nozzle plate are removed through the use of a resist peeling

13 MAR 1997

solution, the nozzle plate and a first substrate comprising a polycarbonate resin are washed and dried and then bonded to each other with an adhesive. A satisfactory bonding strength could be obtained.

5 The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
10 the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A
15 rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to
20 substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example E3

25 A resist layer was left only on the reverse surface of a nozzle plate comprising a stainless steel in the same manner as that of Example E2. A high polymer of an ethylene tetrafluoride/vinyl ester copolymer was dissolved in a solvent having a suitable vapor pressure, and the solution was coated on the nozzle plate through
30 dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 20 cm/min, and the coating was dried at 120°C to form a 0.02
35 μm-thick fluoropolymer layer. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact



13 MAR 1997

angle of 100° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted. Further, the resist layer and fluoropolymer layer on the reverse surface of the nozzle plate were removed with a resist peeling solution.

A first substrate comprising a polyethersulfone resin and the nozzle plate subjected to the surface treatment were washed and dried and then bonded to each other by means of an adhesive tape. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer and the positive-working layer may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the coating method.

Embodiment F

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

13 MAR 1997


In the process according to the present embodiment, an ink jet recording head comprising a fluoropolymer layer formed on the surface of a nozzle for jetting an ink is produced by coating a fluoropolymer on the whole surface of a nozzle plate through dipping, forming a protective layer at least within the nozzle, grinding the reverse surface of the nozzle plate to remove at least the fluoropolymer layer and removing the protective layer.

10 In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

20 The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for the molecular weight to be increased prior to the formation of the film.

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

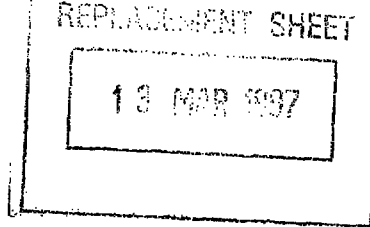

In order to homogeneously form a fluoropolymer layer also within a nozzle, it is necessary that after a fluoropolymer is dissolved in a solvent having a suitable vapor pressure to a relative low concentration, the solution be coated on a nozzle plate isolated as a part through dipping. Further, the nozzle plate cannot be bonded to an ink jet recording head without removing through grinding the fluoropolymer layer formed on the reverse surface of the nozzle plate. Further, when the reverse surface of the nozzle plate serves as an ink passage, the presence of the fluoropolymer polymer is detrimental to the discharge of bubbles formed within the ink and it becomes impossible to conduct a treatment for rendering the surface hydrophilic for preventing a lowering in the capability of discharging bubbles.

In this connection, it is noted that, in the step of grinding, when the fluoropolymer layer is not protected, the fluoropolymer layer is flawed by an abrasive material or a fraction of the ground substrate, so that an ink droplet does not go straight, which unfavorably gives rise to an unacceptable setting quality. It is preferred for the protective layer to be formed on the surface of the nozzle and within the nozzle. However, it is very difficult to form another layer on a fluoropolymer layer having excellent water repellency and oil repellency according to a simple method. Since the nozzle comprises a thin pipe, a protective layer can be relatively easily formed within the nozzle. In the step of grinding, the protection of the surface of the nozzle is not always necessary when the surface of the nozzle is in close contact with a support and a protective layer is formed within the nozzle. When the protective layer comprises a high polymer soluble in a solvent which does not attack the fluoropolymer, it can be easily provided or removed and the water repellency of the fluoropolymer as well can be maintained.

Example F1

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 3 designates a first substrate provided with a pattern groove for an ink passage. Numeral 4 designates a nozzle plate. An ink passage is formed by laminating both members on top of the other.

Fig. 8 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 8 (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising a polysulfone resin prior to the treatment. Fig. 8 (b) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising a polysulfone resin through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 1 % by weight at a rate of 10 cm/min, and the coating was dried at 120°C to form a 0.1 μ m-thick polymer layer of "Teflon AF". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 8 (c) shows a state obtained when a photoresist having a high viscosity is coated through dipping and baked without exposure. Although no homogeneous coating could be conducted, a protective layer 22 was formed at least within the nozzle. The polysulfone resin, as such,


13 MAR 1997



is attacked by a solvent for a photoresist. Since, however, a dense film comprising a fluoropolymer is formed, no deterioration occurred. Fig. 8 (d) shows a state obtained when the reverse surface of the nozzle plate is ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #8000 comprising a diamond powder as a grinding agent, a load of 20 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. The fluoropolymer layer and protective layer within the nozzle were not ground but maintained as they were. In the polysulfone resin per se as well, the slightly ground surface 23 is a flat surface having a suitable surface roughness and has an improved wettability with an ink. If necessary, it is also possible to conduct a treatment for rendering the surface hydrophilic. Fig. 8 (e) shows a state obtained when the nozzle plate is immersed in a water-based resist peeling solution and heated to remove the resist of the protective layer. A smooth fluoropolymer layer free from a flaw caused by grinding appeared on the surface of the nozzle.

The nozzle plate subjected to a treatment for rendering the surface water-repellent and a first plate comprising a polysulfone resin were washed and dried, and a solvent was coated thereon. The nozzle plate and the first substrate were bonded to each other through a solvent cement to assemble an ink jet recording head. The reverse surface of the nozzle plate had an excellent flatness, a good working property and a large adhesion.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at

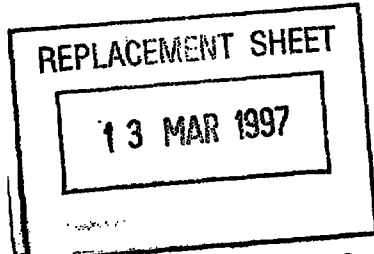

70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example F2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Fig. 4 (a) is an enlarged view of the vicinity of the nozzle in a nozzle plate comprising nickel prior to the treatment. Fig. 4 (b) shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent having a suitable vapor pressure and coated on the whole surface of a nozzle plate comprising nickel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.2 % by weight at a rate of 100 cm/min, and the coating was dried at 120°C to form a 0.05 µm-thick polymer layer of "CYTOP CTX". The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact angle of 105° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

Fig. 4 (c) shows a state obtained when an acrylic resin is dissolved in acetone and the solution is coated several times through dipping to form a coating which is

REPLACEMENT SHEET

13 MAR 1997

This Sheet Has Been Replaced




46

then dried. Although no homogeneous coating could be attained, a protective layer 22 was formed at least within the nozzle. Fig. 4 (d) shows a state obtained when the reverse surface of the nozzle plate is ground through the use of a lapping paper. Suitable grinding conditions may be selected. In this example, the grinding was conducted by a method wherein use is made of a lapping paper of #2000 comprising a diamond powder as a grinding agent, a load of 100 g/cm² is applied while injecting water, and the surface of the fluoropolymer and the lapping paper are mutually rotated. The fluoropolymer layer and protective layer within the nozzle could be maintained as they were without being ground. In the nickel per se as well, the slightly ground surface 22 is a flat surface having a suitable surface roughness and has an improved adhesion to an adhesive. If necessary, it is also possible to conduct a treatment for rendering the surface hydrophilic. Fig. 4 (e) shows a state obtained when the nozzle plate is exposed to an ultrasonic wave and the acrylic resin as the protective layer is removed. A smooth fluoropolymer layer free from a flaw caused by grinding appeared on the surface of the nozzle.

Fig. 4 (f) shows a state obtained when the nozzle plate subjected to the above-described treatment and a first substrate comprising a polycarbonate resin washed and dried and then bonded to each other with an adhesive. A satisfactory bonding strength is obtained.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the

THIS SHEET HAS BEEN
REPLACED

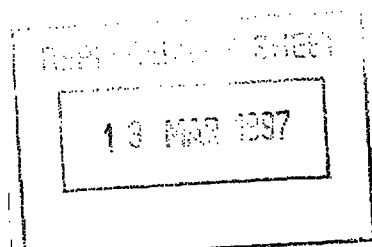

recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

10 Example F3

A high polymer of an ethylene tetrafluoride/vinyl ester copolymer was dissolved in a solvent having a suitable vapor pressure, and the solution was coated on a nozzle plate comprising stainless steel through dipping. Although the concentration of the solution and the film thickness can be suitably selected, in this example, the nozzle plate was pulled up from a solution having a concentration of 0.1 % by weight at a rate of 20 cm/min, and the coating was dried at 120°C to form a 0.02 μm -thick fluoropolymer layer. The observation under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a high contact angle of 100° to water, that is, a high water repellency. Further, it was also confirmed that the treatment for rendering the inside of the nozzle ink-repellent could be homogeneously conducted.

PVA (polyvinyl alcohol) was dissolved in dioxane, and the coating was conducted. The resultant coating was then dried to form a protective layer at least within the nozzle. Further, grinding was conducted through the use of a PVA grinding stone under suitable conditions to remove a fluoropolymer polymer formed on the reverse surface of the nozzle plate. The nozzle plate was immersed in dioxane and, in this state, exposed to an ultrasonic wave to remove the protective layer comprising PVA.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

13 MAR 1997




A first substrate comprising a polyethersulfone resin and the nozzle plate subjected to the above-described surface treatment were washed and dried and then bonded to each other by means of an adhesive tape in the same manner as that of Example 2 to assemble an ink jet recording head. The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.


The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer and protective layer formed on the surface of the nozzle may be varied and are not particularly limited. Further, there is no particular limitation on the solvent for the fluoropolymer and the conditions for coating and grinding.

Embodiment G

In the process according to this embodiment, an ink jet recording head comprising a fluoropolymer layer formed on the surface of a nozzle for jetting an ink is

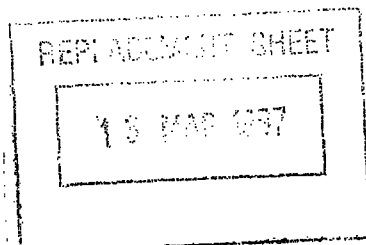

This Sheet Has Been Replaced



produced by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent and bringing the spread film into contact with the surface of a nozzle.

5 In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a
10 remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

The fluoropolymer represented by polyethylene
15 tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low,
20 but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties
25 of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is
30 indispensable for the molecular weight to be increased prior to the formation of the film.

When a solution of a fluoropolymer dissolved in a solvent is spread on the surface of water and the solvent is then evaporated, a water surface spread film of a
35 fluoropolymer is formed. The film thickness can be regulated by preparing a calibration curve and regulating the amount of dropping of the solution, the concentration

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

of the solution, etc. When the surface of a nozzle is brought into contact with the surface of water, the water surface spread film of a fluoropolymer is transferred to only a portion which has been brought into contact with the spread film but not transferred within the nozzle. Even in a failure in operation, the inner diameter of the nozzle is merely reduced by the film thickness of the water surface spread film, so that the water surface spread film enters the inside of the nozzle by the same distance as the inner diameter of the nozzle at the maximum. Ink repellency can be attained even when the thickness of the fluoropolymer film is as small as about 100 Å. Since the nozzle diameter is 100 µm or less, there occurs no problem in the practical use.

The water surface spread film of a fluoropolymer has a sufficient film strength. A sufficient film strength can be obtained by transferring a water surface spread film of a fluoropolymer on the surface of a nozzle and heat-treating the transferred film. If necessary, the transfer of the water surface spread film of a fluoropolymer on the surface of the nozzle can be repeated a plurality of times for the purpose of enhancing the ink repellency.

Example G1

Fig. 10 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 11 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 11 (a) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water. Although the concentration of the solution and the amount




13 MAR 1997



of dropping of the solution can be suitably selected, in this example, a solution having a concentration of 0.05 % by weight was prepared, the amount of solution capable of forming a 0.1 μm -thick polymer layer of "Teflon AF" was calculated, and the solution in the determined amount was dropped on the surface of water. Fig. 11 (b) shows a state obtained when the surface of a nozzle comprising an acrylic resin is brought into contact with the water surface spread film of a fluoropolymer formed by evaporating the fluorocarbon solvent. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state. Further, the nozzle may be submerged into the water to some extent. Fig. 11 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer a water surface spread film of a fluoropolymer to the surface of the nozzle.

Fig. 12 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 11 (c). When the surface of the nozzle was brought into contact with the surface of water, the water surface spread film of a fluoropolymer was transferred to the surface of the nozzle only at a portion which had been brought into contact with the water surface spread film and the water surface spread film positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour, and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted.

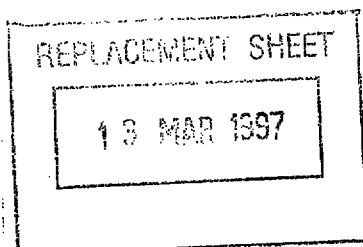


As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 3 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate. Fig. 13 is a typical cross-sectional views showing the steps of rendering the surface of a nozzle water-repellent. Fig. 13 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate 43 comprising nickel prior to the treatment. Fig. 13 (b) is shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, a 0.05 μ m-thick water surface spread film 31 of a fluoropolymer formed on the surface of water is transferred on the

13 MAR 1997



surface of a nozzle plate and the transferred film is heat-treated at 180°C for one hour. The observation of the thin film under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 108°C to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 13 (c) shows a state obtained when the nozzle plate subjected to the above-described surface treatment for rendering the surface of the nozzle water-repellent and a first substrate 52 comprising a polycarbonate resin are washed and dried and then bonded to each other with an adhesive 51.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G3

A high polymer of a diperfluoroalkyl fumarate/dialkyl fumarate copolymer was dissolved in a fluorocarbon solvent, and the solution was spread on the surface of water. The resultant water spread film of a

13 MAR 1997

fluoropolymer having a thickness of 0.01 μm was transferred on the surface of a nozzle in the same manner as that of Example 1. The above step of transfer was additionally repeated twice, and the resultant film was
5 heat-treated at 120°C for one hour. The observation of the thin film under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that
10 the inside of the nozzle was subjected to substantially no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of
15 setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting
20 quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency.

A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a
25 result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period
30 of time could be realized.


The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer formed on
35 the surface of the nozzle may be varied and are not particularly limited.

Embodiment H

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



In the present embodiment, a LB film of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. The LB film is formed through the use of a polydiperfluoroalkyl fumarate or its copolymer as a
5 fluoropolymer.

In the process according to the present embodiment, a LB film is formed by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent, moving a barrier to form
10 a Langmuir film from the resultant spread film and forming a LB film of a fluoropolymer on the surface of a nozzle by a horizontal deposition method.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water
15 to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of
20 the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance.
25 It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer
30 with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be
35 easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is

13 MAR 1997



indispensable for the molecular weight to be increased prior to the formation of the film.

Since the LB film of a fluoropolymer is a dense film on a molecular level, a very homogeneous water repellent effect can be attained even when the film thickness is small. The surface energy of the LB film of a fluoropolymer having a laminate structure of at least one layer is equal to that of a solid film, so that a more complete ink repellency can be obtained. However, in a usual polymer, since the molecular skeleton has a high degree of freedom, the molecule is in a random coil form. In this case, no LB film is formed, and even when coating was conducted thick, the strength of the resultant film is smaller than that of the LB film and the homogeneity is poor due to the occurrence of interstice. By contrast, when the fluoropolymer is a polydiperfluoroalkyl fumarate or its copolymer, the molecule takes a rigid rod form due to a great bulk of the side chain, which enables the LB film to be easily formed.

When a LB film is formed by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent, moving a barrier to form a Langmuir film from the resultant spread film and forming a LB film of a fluoropolymer on the surface of a nozzle by a horizontal deposition method, only a portion which has been brought into contact with the Langmuir film is rendered ink-repellent and the inside of the nozzle is subjected to no treatment. Even in a failure in operation, the inner diameter of the nozzle is merely reduced by the film thickness of the LB film, so that the LB film enters the inside of the nozzle by the same distance as the inner diameter of the nozzle at the maximum. The LB film of a fluoropolymer has a thickness of about 10 Å per layer, while the diameter of the nozzle is about several tens of μm , so that there occurs no problem in the practical use.

13 MAR 1997




The LB film of a fluoropolymer has a sufficient film strength. Since the LB film is formed by a horizontal deposition method, no layer of water or the like is present between the surface of the nozzle and the LB film of a fluoropolymer, so that a satisfactory bonding strength can be obtained. If possible, it is preferred for the film to be heated to a temperature not below the glass transition temperature of the fluoropolymer.


Example H1

Fig. 10 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 14 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 14 (a) shows a state (224) obtained when a polydiperfluoroalkyl fumarate is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water.

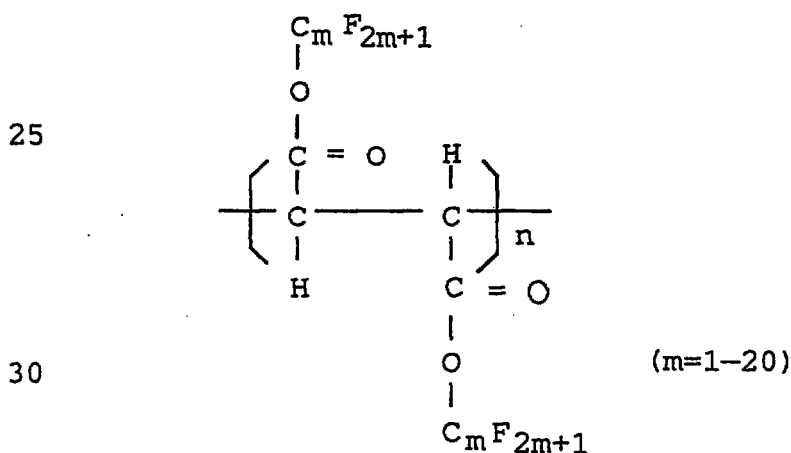

With respect to the concentration of the solution and the amount of dropping of solution, a preliminary experiment was conducted to prepare a π -A curve, the amount of the solution necessary for forming on the surface of water a monomolecular layer having an area of half of the area of

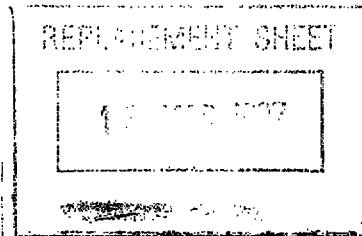

This Sheet Has Been Replaced



58

the surface of water was calculated, and the solution in the calculated amount was dropped on the surface of water. Fig. 14 (b) shows a state obtained when after evaporation of the fluorocarbon solvent, a barrier 223 is moved to form a Langmuir film 225 and the surface of a nozzle comprising an acrylic resin in an ink jet recording head 226 is brought into contact with the Langmuir film. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state. Further, the nozzle may be submerged into the water to some extent. Fig. 14 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer the LB film of a fluoropolymer to the surface of the nozzle.

Fig. 15 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 14 (c). When the surface of the nozzle was brought into contact with the surface of water, the LB film of a fluoropolymer 231 was transferred to the surface of the nozzle only at a portion which had been brought into contact with the LB film and the Langmuir film 225 positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour, and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example H2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 3 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 13 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 13 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel not subjected to the treatment. Fig. 13 (b) shows a state obtained when a high polymer of a polydiperfluoroalkyl fumarate/polydiisopropyl fumarate (4 : 1) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, the spread film is compressed to form a Langmuir film and a LB film having a three-layer structure is formed on the surface of a nozzle plate and the LB film is heat-treated at 180°C for one hour. The observation under a microscope has revealed that the formed thin film was very dense and

13 MAR 1997



homogeneous. The film had a contact angle of 108° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 13

5 (c) shows a state obtained when the nozzle plate subjected to the above-described treatment for rendering the surface of the nozzle water-repellent and a first substrate comprising a polysulfone resin are washed and dried and then bonded to each other with an adhesive.

10 The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then,
15 the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A
20 rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to
25 substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example H3

A high polymer of a polydiperfluoroalkyl
30 fumarate/polyvinyl ester copolymer (9 : 1) was dissolved in a fluorocarbon solvent, the solution was spread on the surface of water, and the resultant film was compressed to form a Langmuir film which was then transferred to the surface of a nozzle in the same manner as that of Example
35 H1. The above step of transfer was repeated four times, and the transferred LB film was heat-treated at 120°C for one hour. The observation under a microscope has

15 MAR 1997

This Sheet Has Been Replaced



61

revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to
5 no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the
10 nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is,
15 the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000
20 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Embodiment I

25 In the process according to the present embodiment, a coupling compound layer is formed on the surface of a nozzle prior to the formation of a water-repellent layer through transfer. A combination of the above-described transfer method with the formation of a coupling compound
30 layer makes it possible to form a water-repellent layer having an excellent adhesion and a large thickness.

Example I1

A coupling compound layer was formed on the surface of an ink jet recording head comprising glass, silicon,
35 polysulfone or polycarbonate.

γ -Aminopropyltriethoxysilane, N- β -aminomethyl- γ -aminopropyltrimethoxysilane, N-phenyl- γ -

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997




aminopropyltrimethoxysilane, N- β -aminoethyl- γ -aminopropyltrimethoxysilane or N- β -aminoethyl- γ -aminopropylmethyldimethoxysilane was used as the coupling compound. A solvent capable of dissolving the coupling
5 compound, for example, methanol, ethanol or water, is used as the solvent. Although the concentration of the coupling compound can be arbitrarily selected, in the present example, the surface of a nozzle was immersed in a 0.2 wt.% solution and drying was conducted at a
10 temperature capable of evaporating the solvent to form a coupling layer.

Then, a fluoropolymer layer (a solution of "CYTOP" (manufactured by Asahi Glass Co., Ltd.) dissolved in a fluorocarbon organic solvent having a high boiling point
15 was formed on the surface of a coupling layer by a transfer method. Specifically, the solution was coated on an elastic body as a support having a smooth surface used in the transfer, such as a silicone rubber, a urethane rubber, a butyrene rubber, gelatin or a
20 chloroprene rubber, by spin coating or uniform pull-up immersion, and a nozzle plate was pressed against the coated surface while regulating the pressure.

Thereafter, this head was baked at a temperature not below the glass transition temperature, for example,
25 150°C, for the purpose of removing the solvent in the fluoropolymer layer and enhancing the fluidity to improve the coating property. The observation of the surface of the nozzle under a microscope has revealed that the formed thin film was very dense and homogeneous. The
30 film had a contact angle of 110° to water, that is, a high water repellency.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of
35 setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at

13 MAR 1997



70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example I2

An ink jet recording head was produced in the same manner as that of Example I1, except that the amorphous fluororesin used in Example I1 was changed to "Teflon AF" (trade name) manufactured by De Pont (E.I.) de Nemours & Co. and the temperature of baking after coating was changed to 180°C.

Example I3

An ink jet recording head was produced in the same manner as that of Example I1, except that the amorphous fluororesin used in Example I1 was changed to "Teflon AF" (trade name) manufactured by De Pont (E.I.) de Nemours & Co. and the temperature of baking after coating was changed to 180°C.

Example I4

A head provided with a coupling layer and a water-repellent layer was produced in the same manner as that of Example I1, except that the surface of the nozzle was previously allowed to stand in oxygen plasma or ultraviolet irradiation atmosphere.

As with the head produced in Example 1, the head thus produced had a contact angle of 100° or more to water after rubbing the head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a

13 MAR 1997

high setting quality for a long period of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer formed on the surface of a nozzle may be varied and are not particularly limited.

Industrial Applicability

The ink jet recording head of the present invention can be widely applied as a recording head to be mounted on an ink jet recording device such as an ink jet printer.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

13 MAR 1997

65



CLAIMS

1. An ink jet recording head for use in an ink jet recording device, wherein a water-repellent layer
5 comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink.
2. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises a solvent-soluble fluoropolymer.
- 10 3. The ink jet recording head according to claim 2, wherein the solvent-soluble fluoropolymer has a fluorine atom in its substantially all the molecular ends.
4. The ink jet recording head according to claim 1, wherein the water-repellent layer is formed through a
15 coupling compound layer.
5. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises an alternating copolymer of a fluoroethylene with a hydrocarbon ethylene or its analogue or derivative.
- 20 6. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises a LB film of a fluoropolymer.
7. The ink jet recording head according to claim 1, wherein the water-repellent layer comprises a fluoro
25 cyclic polymer.
8. A process for producing an ink jet recording head for use in an ink jet recording device, comprising subjecting the surface of a nozzle for jetting an ink of the ink jet recording head to a treatment for rendering
30 the surface of the nozzle water-repellent, characterized in that the process comprises the steps of:
- preparing a polymer solution of a fluoropolymer dissolved in a solvent;
- coating through dipping said polymer solution on the
35 whole surface of a nozzle plate provided with an ink jet hole to form a water-repellent layer comprising a

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



66

fluoropolymer on the whole surface of the nozzle plate;
and

removing through grinding the water-repellent layer
on the reverse surface (the opposite side of a side from
5 which an ink is jetted) of the nozzle plate in the water-
repellent layer formed on each surface of the nozzle
plate.

9. The process according to claim 8, which further
comprises, after forming the water-repellent layer on the
10 whole surface of the nozzle plate, forming a protective
layer on at least the inside or vicinity of the jet hole
of the nozzle, removing through grinding the water-
repellent layer on the reverse surface (the opposite side
of a side from which an ink is jetted) of the nozzle
15 plate in the water-repellent layer formed on each surface
of the nozzle plate and removing said protective layer.

10. A process for producing an ink jet recording
head for use in an ink jet recording device, comprising
subjecting the surface of a nozzle for jetting an ink of
20 the ink jet recording head to a treatment for rendering
the surface of the nozzle water-repellent, characterized
in that the process comprises the steps of:

coating a positive-working resist on at least the
reverse surface (the opposite side of a side from which
25 an ink is jetted) of a nozzle plate provided with an ink
jet hole;

irradiating the nozzle plate with an ionizing
radiation from the surface side of the nozzle plate with
the reverse surface side being light-shielded;

30 developing the irradiated surface and removing the
resist from the surface of the nozzle plate and the
inside of the nozzle hole;

coating through dipping a polymer solution
containing a fluoropolymer dissolved therein on the whole
35 surface of the nozzle plate to form a water-repellent
layer comprising a fluoropolymer on the whole surface of
the nozzle plate; and

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997



removing the resist layer and the water-repellent layer on the reverse surface side of the nozzle plate to form a water-repellent layer on only the surface side of the nozzle plate and the internal surface of the nozzle hole.

11. A process for producing an ink jet recording head for use in an ink jet recording device, comprising subjecting the surface of a nozzle for jetting an ink of the ink jet recording head to a treatment for rendering the surface of the nozzle water-repellent, characterized in that the process comprises the steps of:


forming a polymer layer comprising a polymer solution containing a fluoropolymer dissolved therein on the surface of a transfer medium; and
transferring the polymer layer formed on the transfer medium to a predetermined portion of the surface of the nozzle provided with an ink jet hole.

12. The process according to claim 11, wherein the transfer of the polymer layer is conducted at least once by spreading the polymer solution containing a fluoropolymer dissolved therein on the surface of water, evaporating a solvent contained in the polymer solution and bringing the spread film into contact with the surface of the nozzle.

13. The process according to claim 12, wherein after the transfer of the polymer layer, the transferred polymer layer is heat-treated.

14. The process according to claim 11, which further comprises spreading the polymer solution containing a fluoropolymer dissolved therein on the surface of water, evaporating the solvent, moving a barrier to form a Langmuir film from the resultant spread film and bringing the resultant Langmuir film into contact with the surface of the nozzle to form a LB film comprising at least one layer of a fluoropolymer on the surface of the nozzle.



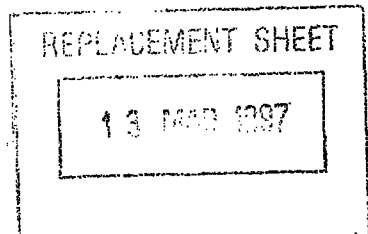

68

15. The process according to claim 11, wherein prior to the transfer of the polymer layer, a coupling layer is formed on the surface of the nozzle.

5 16. The process according to claim 11, wherein the surface of the transfer medium is smooth.

17. The process according to claim 11, wherein the coupling compound layer is formed by immersing a nozzle in a coupling solution comprising a coupling compound and a solvent.

10 18. The process according to claim 11, wherein after exposure of the nozzle to an ozone atmosphere, the coupling layer is formed and the water-repellent layer is then formed.

15 19. The process according to claim 11, wherein after exposure of the nozzle to an ozone atmosphere, the water-repellent layer is formed through transfer.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

13 MAR 1997

69


INK JET RECORDING HEAD AND PROCESS FOR
PRODUCING THE SAME

ABSTRACT

The present invention provides an ink jet recording head for use in an ink jet recording device, wherein a
5 water-repellent layer (21) comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. This water-repellent layer can be formed as a dense, homogeneous layer through the use of a solvent-soluble fluoropolymer, which enables an ink jet
10 recording head excellent in the water-repellent property, the persistence of the water repellency and the durability.

FIGURE 3a, 3b, 3c

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

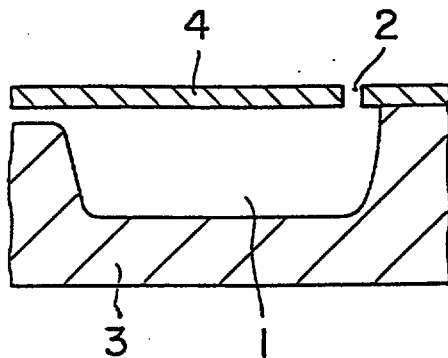


FIG. 1



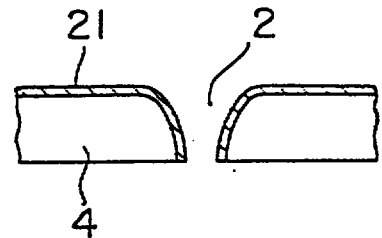


FIG. 2

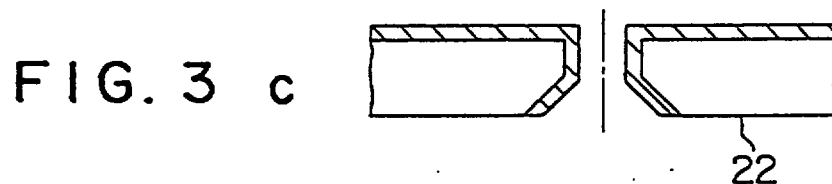

This Sheet Has Been Replaced

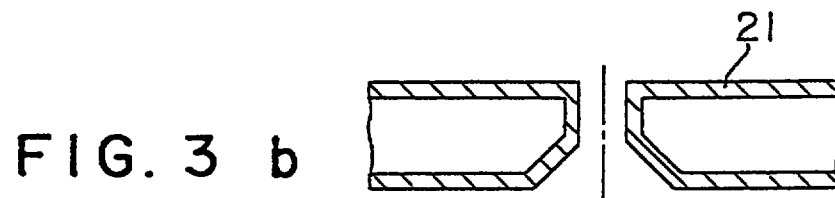

THIS SHEET HAS BEEN
REPLACED

2





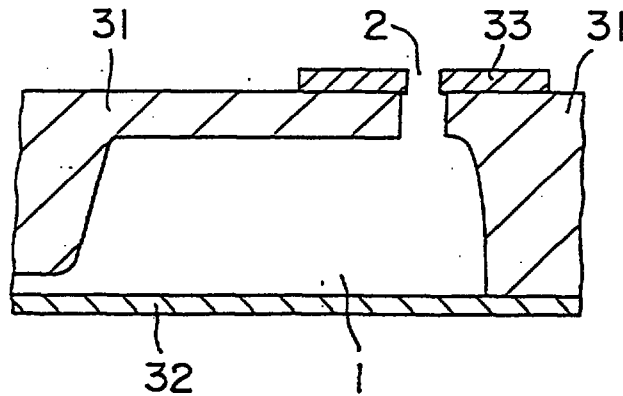


FIG. 4

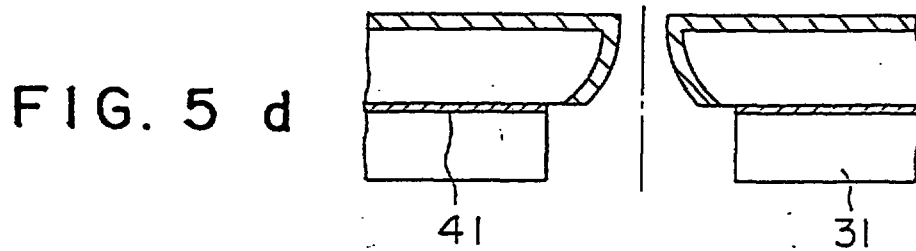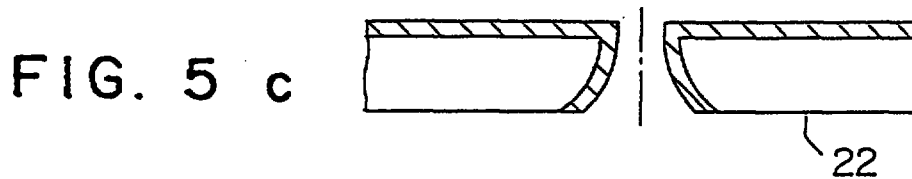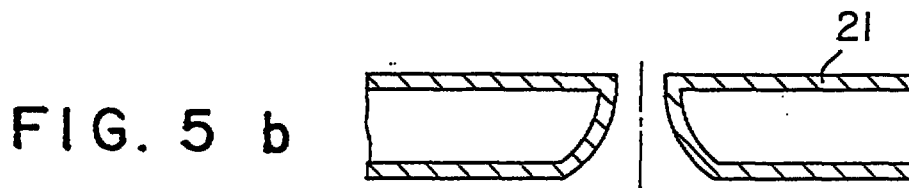

This Sheet Has Been Replaced

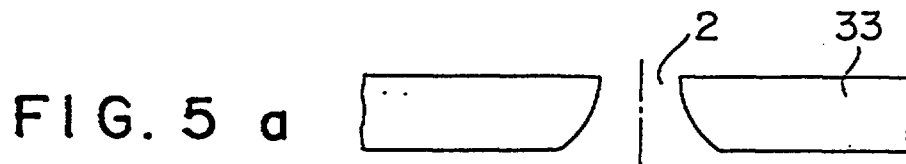

THIS SHEET HAS BEEN
REPLACED

3

FIG. 6 a

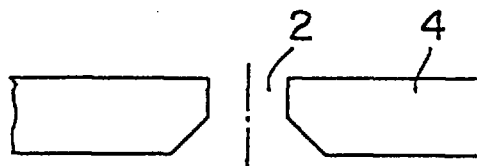


FIG. 6 b

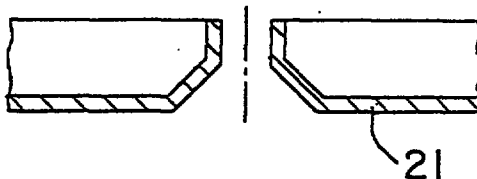


FIG. 6 c

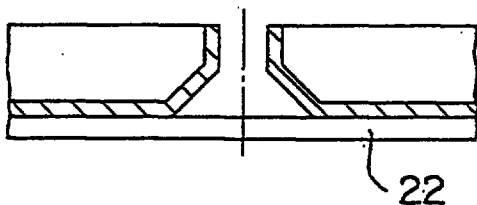


FIG. 6 d




FIG. 6 e

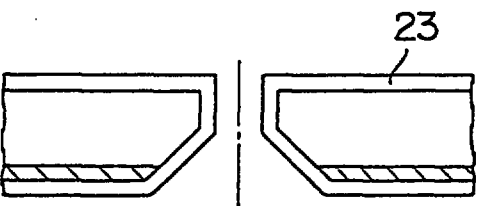


FIG. 6 f



This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

4

FIG. 7 a

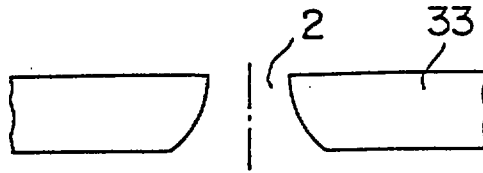


FIG. 7 b

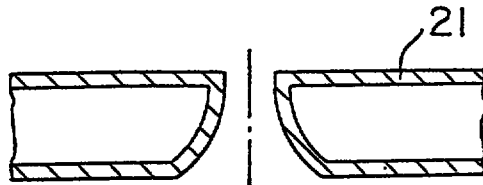


FIG. 7 c

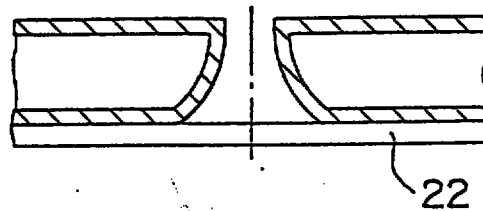


FIG. 7 d




FIG. 7 e


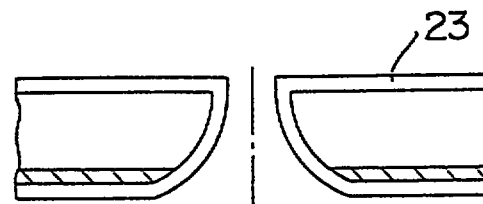


FIG. 7 f



This Sheet Has Been Replaced

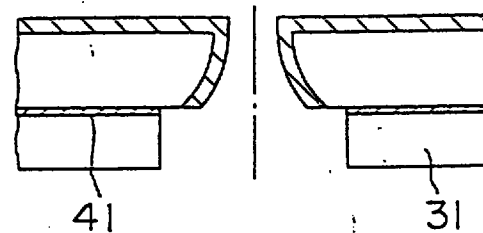

THIS SHEET HAS BEEN
REPLACED

13 MAR 1997

5

FIG. 8 a

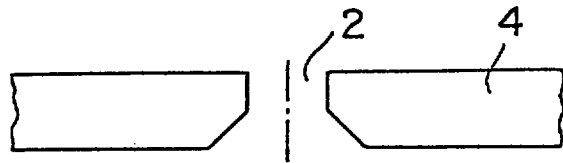


FIG. 8 b

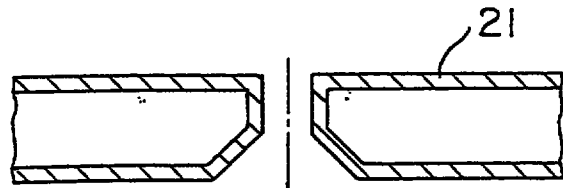


FIG. 8 c

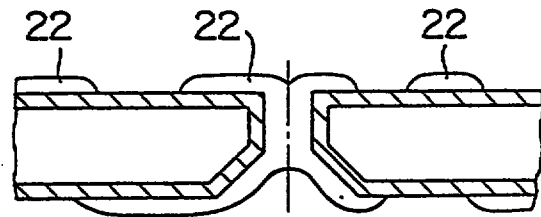


FIG. 8 d


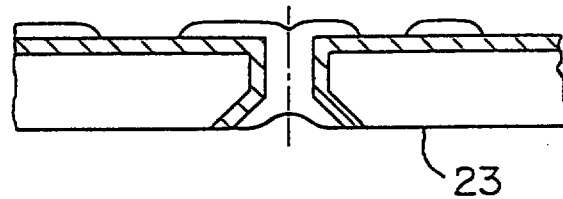



FIG. 8 e



This Sheet Has Been Replaced

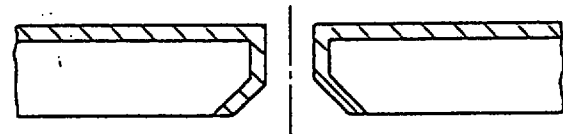

THIS SHEET HAS BEEN
REPLACED

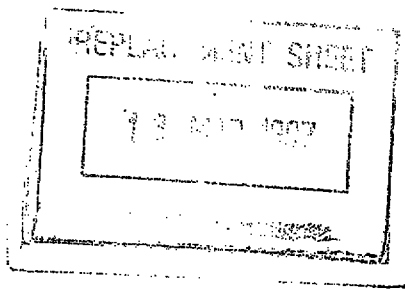

6

FIG. 9 a

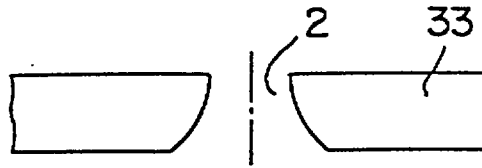


FIG. 9 b

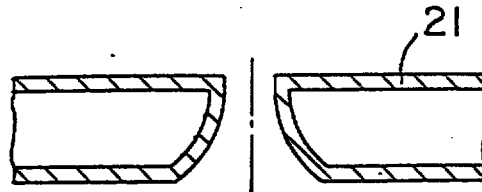


FIG. 9 c

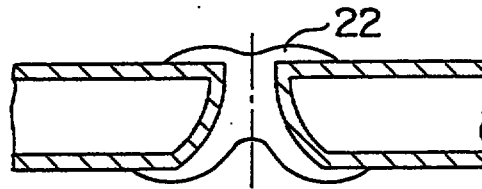


FIG. 9 d

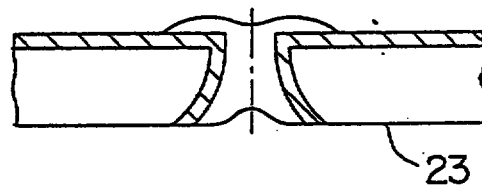


FIG. 9 e





FIG. 9 f



This Sheet Has Been Replaced

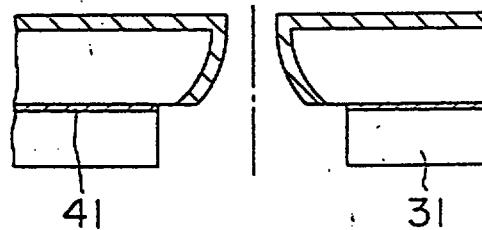

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

13 MAR 1997

7

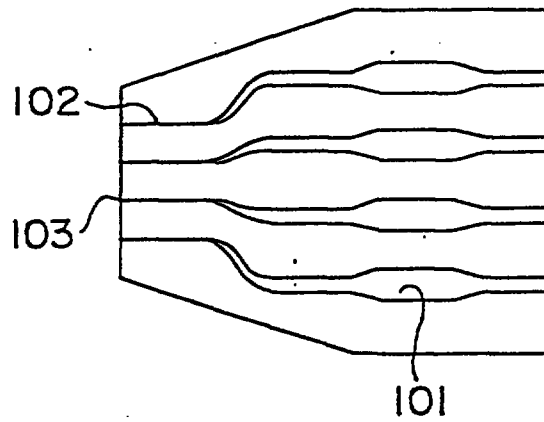


FIG. 10

FIG. 11 a

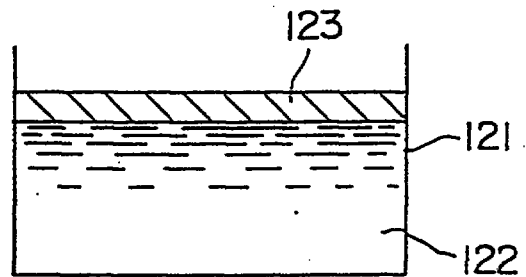


FIG. 11 b


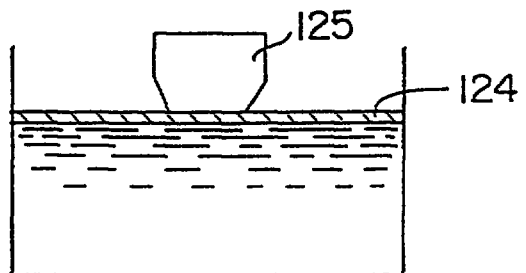



FIG. 11 c



This Sheet Has Been Replaced

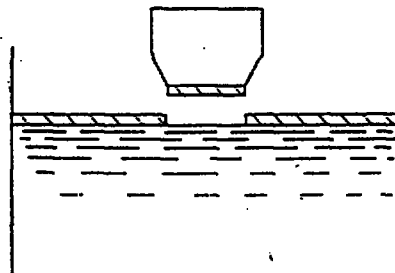

THIS SHEET HAS BEEN
REPLACED

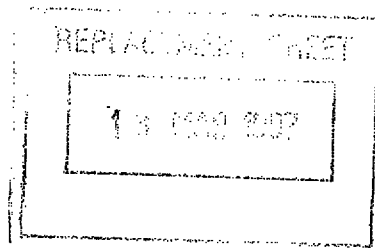

8

This Sheet Has Been Replaced

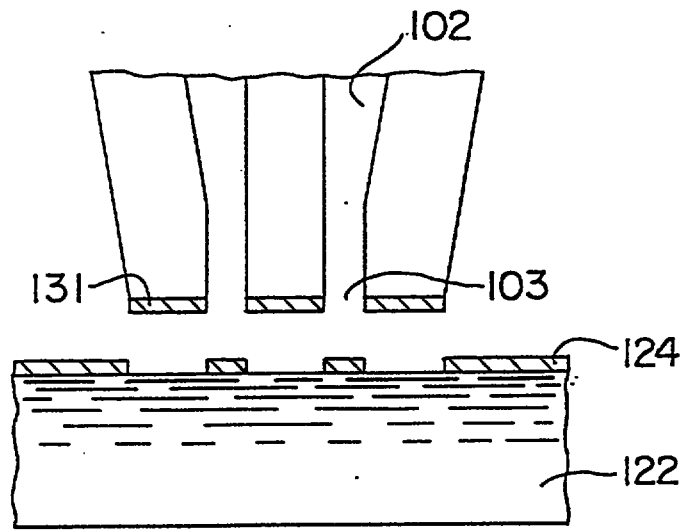



FIG. 12

FIG. 13 a

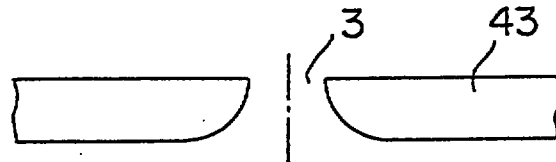


FIG. 13 b


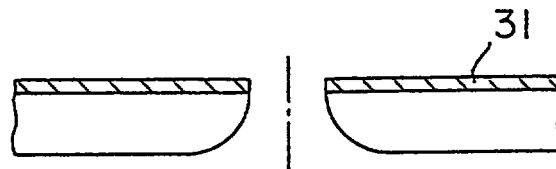


FIG. 13 c

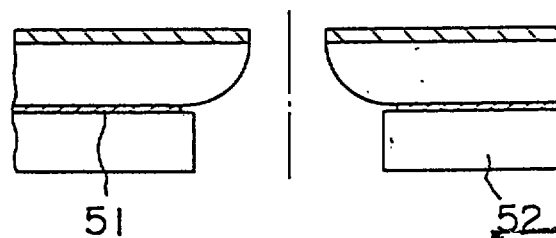

THIS SHEET HAS BEEN REPLACED



FIG. 14 a

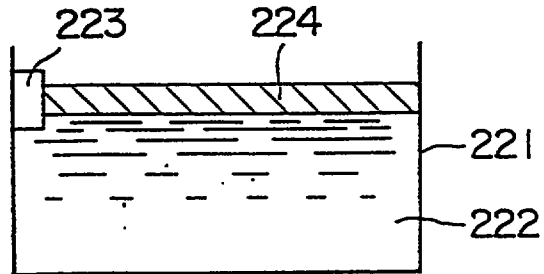


FIG. 14 b

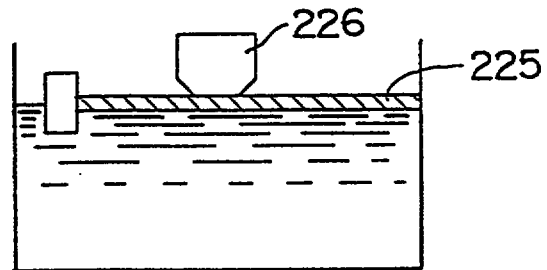


FIG. 14 c


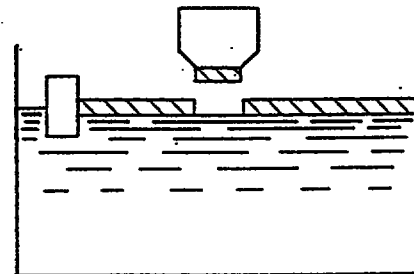


FIG. 15



This Sheet Has Been Replaced

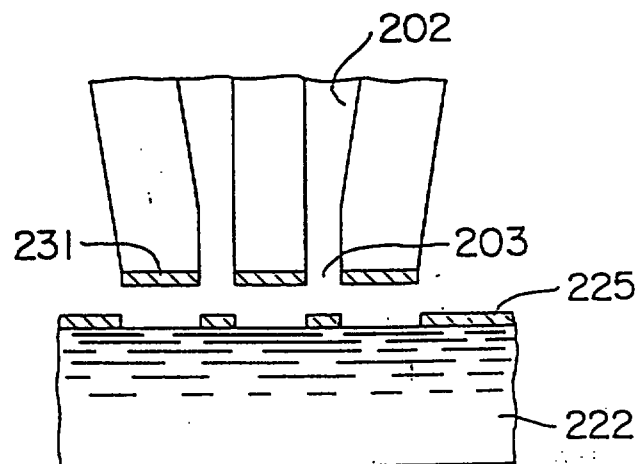

- 1 -

REPLACEMENT SHEET

22 JUL 1998

INK JET RECORDING HEAD AND PROCESS FOR PRODUCING THE SAME

Technical Field

The present invention relates to an ink jet recording head having an excellent water repellency for use in an ink jet recording device and a process for producing the same.

Background Art


A material such as glass, a metal or a resin is used for an ink jet recording head.

In the use of a water-based ink in an ink jet recording head, when the water repellency of the surface of a nozzle is unsatisfactory, droplets of an ink are liable to adhere to the surface of the nozzle, which spoils the rectilinearity of jetted ink droplets, so that it often becomes impossible to conduct recording due to occurrence of troubles such as disturbance of setting.

For this reason, the surface of a nozzle which is a portion of jetting an ink has hitherto been subjected to a treatment for rendering the surface of the nozzle water-repellent. For example, a proposal has been made on a method wherein a particle of a water-repellent material is deposited on the surface of a nozzle, for example, by using a dispersion of carbon flouride particles in an epoxy matrix (see Japanese Patent Application Laid-Open No. 157765/1982) and vacuum baking and plasma polymerization (see Japanese Patent Application Laid-Open Nos. 183161/1985 and 176059/1984)

to render the surface of the nozzle water-repellent. rendering the surface of the nozzle water-repellent, it is not always easy to form a smooth repellent surface free from any defect such as a pinhole. This causes properties to be varied from product to product, and the properties to change with the elapse of time. Further, in the electrostatic powder coating, the baking

THIS SHEET HAS BEEN
REPLACED



22 JUL 1998

- 2 -

temperature should be 300°C or above. In the case of a metal, the dimensional accuracy is spoiled, and it is impossible to apply this method to a resin. When use is made of vacuum deposition, a large device should be used and it is difficult to conduct the process control. Further, in this method, since the bonding strength is insufficient, only a product having an insufficient bonding strength can be obtained.

The present invention can solve the above-described problem, and an object of the present invention is to provide an ink jet recording head which is excellent in the water repellency of the surface of the nozzle, the persistence of the water repellency and the durability and enables a high printing quality to be maintained for a long period of time, and a process for producing the same.

INSERT A

Ink jet recording devices in which a water-repellent layer of a fluoropolymer is formed on the surface of a nozzle are disclosed in JP-A 62-202743, in IBM Technical Disclosure Bulletin, Vol. 22, No. 5, October 1979, Pages 1965 and 1966, and in JP-A 58-124661.

INSERT B

The present invention provides an ink jet recording head for use in an ink jet recording device, wherein a water-repellent layer comprising a homogeneous layer comprising an LB film of a fluoropolymer is formed on the surface of a nozzle for jetting an ink.

The invention also provides a process for producing an ink jet recording head for use in an ink jet recording device, comprising subjecting the surface of a nozzle

22 JUL 1998

- 3 -

for jetting an ink of the ink jet recording head to a treatment for rendering the surface of the nozzle water-repellent, characterised in that the process comprises the steps of:

preparing a polymer solution of a fluoropolymer dissolved in a solvent;

spreading the polymer solution on the surface of water;

evaporating the solvent in the thus spread polymer solution to form a Langmuir film from the resultant spread film;

bringing the resultant Langmuir film into contact with the surface of the nozzle to transfer the resultant Langmuir film therein to form an LB film on a predetermined portion of the surface of the nozzle.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is useful to introduce fluorine having a remarkably small inter-molecular cohesive force. Although a fluoropolymer represented by polytetrafluoroethylene has excellent features such as heat resistance, chemical resistance and weather resistance, it is insoluble in a solvent, so that only powder coating can be applied to the fluoropolymer. This makes it possible to attain a good water-repellent property.

Brief Description of Drawings

Fig. 1 is a schematic cross-sectional view of an ink jet recording head according to an embodiment of the present invention;

22 JUL 1998

- 4 -

Fig 2. is a schematic cross-sectional view of an ink jet recording head according to an embodiment of the present invention;

Fig. 3 and 4 are explanatory views showing a process for forming a water-repellent layer according to a water surface spreading method;

Fig. 5 is a typical cross-sectional view showing the steps of rendering the surface of a nozzle water-repellent; and

Fig. 6 and 7 are explanatory views showing a process for forming a water-repellent layer according to a LB film forming method.

Best Mode for Carrying Out the Invention

Embodiments of the present invention will now be described.

The ink jet recording head according to the present invention is mounted on an ink jet recording device and characterized in that a water-repellent layer comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink.

The above-described water-repellent layer is formed through the use of a solvent-soluble fluoropolymer. The solvent-soluble fluoropolymer is preferably amorphous. Specific preferred examples of the solvent-soluble fluoropolymer include polydiperfluoroalkyl fumarate, Teflon AF (trademark, De Pont (E.I.) de Nemours & Co), solvent-soluble fluoropolymers such as CYTOP (trademark,

22 JUL 1998

- 5 -

Asahi Glass Co., Ltd.) and alternating copolymers of fluoroethylenes with hydrocarbon ethylenes such as an alternating copolymer of difluoroalkyl fumarate with styrene, an alternating copolymer of ethylene trifluoride chloride with a vinyl ether and an alternating copolymer of ethylene tetrafluoride with a vinyl ester, and their analogues and derivatives.

Preferred examples of the solvent include fluorinated liquids include Fluorinert (trademark, 3M Co.), Garden (trademark, Montefluos), trifluoromethylbenzene and hydrochlorofluorocarbon.

The concentration of the fluoropolymer in the fluoropolymer solution is preferably 0.01 to 7 % by weight, still preferably 0.1 to 5 % by weight.

Since the above-described fluoropolymer is solvent-soluble, it is possible to form a water-repellent layer through the use of the fluoropolymer in a solution form according to a coating method or a transfer method. The water-repellent layer thus formed comprises a dense, homogeneous film comprising a homogeneous layer or continuous layer of a fluoropolymer, and it is believed that such a film structure contributes to a remarkable improvement in the water-repellent property and the persistence of the effect of water repellency.

In the present invention, it is also possible to form a water-repellent layer through a coupling compound layer for the purpose of further improving the adhesion between the water repellent layer and the surface of the nozzle.

A further feature of the present invention is that the water-repellent layer can be formed by simple and rapid methods, for example, a coating method such as dipping and a transfer method which will be described later.

22 JUL 1998

- 6 -

In the above-described LB film, at least one layer may be laminated to a desired thickness. A more homogeneous and dense water-repellent layer can be formed by conducting a heat treatment after the transfer of the LB film.

Prior to the transfer of the polymer layer, a coupling compound layer can be formed on the surface of the nozzle, and a combination of the transfer method with the formation of the coupling compound layer enables a water-repellent layer having an excellent adhesion and a large thickness to be formed. Methods of rendering the surface of the nozzle water-repellent including a method of forming a coupling compound layer will now be described.

At the outset, the nozzle plate is immersed in a coupling solution comprising a coupling compound and a solvent and then in a solvent. The immersion of the nozzle plate in a solvent advantageously has the effect of making the thickness of coating of the coupling compound uniform to further stabilize the adhesion between the water-repellent layer and the surface of the nozzle plate.

Water and alcohols, such as methanol and ethanol, can be used as the solvent for the coupling solution. When water is used as the solvent, the handleability becomes better. Further, since the surface tension is so large that it is possible to prevent the coupling compound from penetrating into the hole in the nozzle.

The transferred polymer layer is then baked. It is preferred to conduct the baking at a temperature not below the glass transition point of the polymer. The

22 JUL 1998

- 7 -

baking enables the volatile solvent contained in the polymer layer to be completely removed. Further, the present inventors have found that the heating of the transferred polymer layer to a temperature not below the glass transition point of the polymer leads to an increase in the fluidity of the polymer layer which improves the coating property and further contributes to an improvement in the adhesion.

Further, in the above-described method, the following procedure may be used. After exposure of the surface of the nozzle plate to an ozone atmosphere, a coupling layer is formed, and a water-repellent layer is then formed. Alternatively, after the formation of the coupling layer, the surface of the coupling layer may be exposed to an ozone atmosphere followed by the formation of a water-repellent layer. The surface cleaning treatment wherein use is made of ozone removes stains on the surface, which contributes to a further improvement in the adhesion of the formed layer. The ozone atmosphere can be formed by irradiation with oxygen plasma or ultraviolet rays.

The present invention will now be described in more detail with reference to the following embodiments.

Embodiment G

In the process according to this embodiment, an ink jet recording head comprising a fluoropolymer layer formed on the surface of a nozzle for jetting an ink is produced by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent and bringing the spread film into contact with the surface of a nozzle.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90°,

22 JUL 1998

- 8 -

preferably at least 100°, the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is indispensable for the molecular weight to be increased prior to the formation of the film.

When a solution of a fluoropolymer dissolved in a solvent is spread on the surface of water and the solvent is then evaporated, a water surface spread film of a fluoropolymer is formed. The film thickness can be regulated by preparing a calibration curve and regulating the amount of dropping of the solution, the concentration of the solution, etc. When the surface of a nozzle is brought into contact with the surface of water, the water surface spread film of a fluoropolymer is transferred to only a portion which has been brought into contact with the spread film but not transferred within the nozzle.

22 JUL 1998

- 9 -

Even in a failure in operation, the inner diameter of the nozzle is merely reduced by the film thickness of the water surface spread film, so that the water surface spread film enters the inside of the nozzle by the same distance as the inner diameter of the nozzle at the maximum. Ink repellency can be attained even when the thickness of the fluoropolymer film is as small as about 10nm (100 Å). Since the nozzle diameter is 100 μm or less, there occurs no problem in the practical use.

The water surface spread film of a fluoropolymer has a sufficient film strength. A sufficient film strength can be obtained by transferring a water surface spread film of a fluoropolymer on the surface of a nozzle and heat-treating the transferred film. If necessary, the transfer of the water surface spread film of a fluoropolymer on the surface of the nozzle can be repeated a plurality of times for the purpose of enhancing the ink repellency.

Example G1

Fig. 10 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 11 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 11 (a) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water. Although the concentration of the solution and the amount

This Sheet Has Been Replaced





22 JUL 1998

of dropping of the solution can be suitably selected, in this example, a solution having a concentration of 0.05 % by weight was prepared, the amount of solution capable of forming a 0.1 μm -thick polymer layer of "Teflon AF" was calculated, and the solution in the determined amount was dropped on the surface of water. Fig. 11 (b) shows a state obtained when the surface of a nozzle comprising an acrylic resin is brought into contact with the water surface spread film of a fluoropolymer formed by evaporating the fluorocarbon solvent. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state. Further, the nozzle may be submerged into the water to some extent. Fig. 11 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer a water surface spread film of a fluoropolymer to the surface of the nozzle.

Fig. 12 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 11 (c). When the surface of the nozzle was brought into contact with the surface of water, the water surface spread film of a fluoropolymer was transferred to the surface of the nozzle only at a portion which had been brought into contact with the water surface spread film and the water surface spread film positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour, and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted.



22 JUL 1998

As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 3 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate. Fig. 13 is a typical cross-sectional views showing the steps of rendering the surface of a nozzle water-repellent. Fig. 13 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate 43 comprising nickel prior to the treatment. Fig. 13 (b) shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, a 0.05 μm -thick water surface spread film 31 of a fluoropolymer formed on the surface of water is transferred on the



22 JUL 1998

- 12 -

surface of a nozzle plate and the transferred film is heat-treated at 180°C for one hour. The observation of the thin film under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 108° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 13 (c) shows a state obtained when the nozzle plate subjected to the above-described surface treatment for rendering the surface of the nozzle water-repellent and a first substrate 52 comprising a polycarbonate resin are washed and dried and then bonded to each other with an adhesive 51.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G3

A high polymer of a diperfluoroalkyl fumarate/dialkyl fumarate copolymer was dissolved in a fluorocarbon solvent, and the solution was spread on the surface of water. The resultant water spread film of a

22 JUL 1998

- 13 -

fluoropolymer having a thickness of 0.01 μm was transferred on the surface of a nozzle in the same manner as that of Example 1. The above step of transfer was additionally repeated twice, and the resultant film was heat-treated at 120°C for one hour. The observation of the thin film under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to substantially no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency.

A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

The present invention was described above with reference to examples. Materials used in the ink jet recording head and structures of the ink jet recording head and the kind of the fluoropolymer layer formed on the surface of the nozzle may be varied and are not particularly limited.

Embodiment H

22 JUL 1998

- 14 -

In the present embodiment, a LB film of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. The LB film is formed through the use of a polydiperfluoroalkyl fumarate or its copolymer as a fluoropolymer.

In the process according to the present embodiment, a LB film is formed by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent, moving a barrier to form a Langmuir film from the resultant spread film and forming a LB film of a fluoropolymer on the surface of a nozzle by a horizontal deposition method.

In the treatment for rendering the surface of the nozzle water-repellent, since the contact angle of water to the surface of the nozzle should be at least 90° , preferably at least 100° , the polarizability is so small that it is indispensable to introduce fluorine having a remarkably small inter-molecular cohesive force. Further, in the treatment for rendering the surface of the nozzle water-repellent, a high adhesion is separately required from the viewpoint of use.

The fluoropolymer represented by polyethylene tetrafluoride has excellent features such as heat resistance, chemical resistance and weather resistance. It, however, is insoluble in a solvent, so that, as described above, only powder coating can be applied thereto. Therefore, not only the film strength is low, but also the adhesion at the interface is remarkably low. In recent years, a copolymer of a solvent-soluble polymer with a fluoropolymer and a synthetic polymer having a special fluorine-containing side chain have become prepared. Since these polymers can maintain properties of the conventional fluoropolymers and are soluble in a solvent, a smooth surface free from a pinhole can be easily prepared by coating. In order to attain a film strength and a bonding strength between the film and the substrate derived from the film strength, it is

22 JUL 1998

- 15 -

indispensable for the molecular weight to be increased prior to the formation of the film.

Since the LB film of a fluoropolymer is a dense film on a molecular level, a very homogeneous water repellent effect can be attained even when the film thickness is small. The surface energy of the LB film of a fluoropolymer having a laminate structure of at least one layer is equal to that of a solid film, so that a more complete ink repellency can be obtained. However, in a usual polymer, since the molecular skeleton has a high degree of freedom, the molecule is in a random coil form. In this case, no LB film is formed, and even when coating was conducted thick, the strength of the resultant film is smaller than that of the LB film and the homogeneity is poor due to the occurrence of interstice. By contrast, when the fluoropolymer is a polydiperfluoroalkyl fumarate or its copolymer, the molecule takes a rigid rod form due to a great bulk of the side chain, which enables the LB film to be easily formed.

When a LB film is formed by spreading a solution of a fluoropolymer dissolved in a solvent on the surface of water, evaporating the solvent on the surface of a Langmuir film from the resultant spread film and forming a LB film of a fluoropolymer on the surface of a nozzle by a horizontal deposition method, only a portion which has been brought into contact with the Langmuir film is rendered ink-repellent and the inside of the nozzle is subjected to no treatment. Even in a failure in operation, the inner diameter of the nozzle is merely reduced by the film thickness of the LB film, so that the LB film enters the inside of the nozzle by the same distance as the inner diameter of the nozzle at the maximum. The LB film of a fluoropolymer has a thickness of about 1nm (10 Å) per layer, while the diameter of the nozzles about several tens of μm , so that there occurs no problem in the practical use.



22 JUL 1998


- 16 -

The LB film of a fluoropolymer has a sufficient film strength. Since the LB film is formed by a horizontal deposition method, no layer of water or the like is present between the surface of the nozzle and the LB film of a fluoropolymer, so that a satisfactory bonding strength can be obtained. If possible, it is preferred for the film to be heated to a temperature not below the glass transition temperature of the fluoropolymer.

Example H1

Fig. 10 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 14 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 14 (a) shows a state (224) obtained when a polydiperfluoroalkyl fumarate is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water.

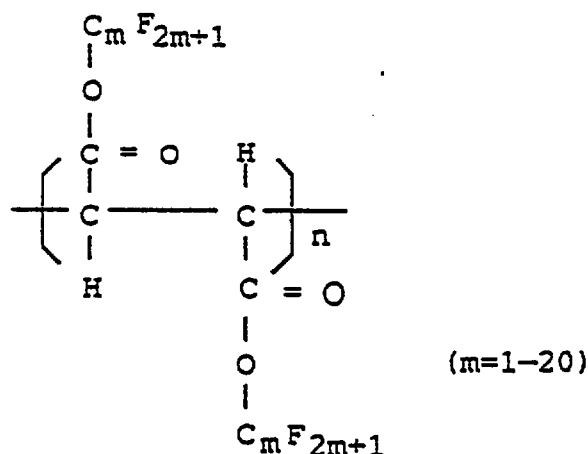

With respect to the concentration of the solution and the amount of dropping of solution, a preliminary experiment was conducted to prepare a π -A curve, the amount of the solution necessary for forming on the surface of water a monomolecular layer having an area of half of the area of



22 JUL 1998

the surface of water was calculated, and the solution in the calculated amount was dropped on the surface of water. Fig. 14 (b) shows a state obtained when after evaporation of the fluorocarbon solvent, a barrier 223 is moved to form a Langmuir film 225 and the surface of a nozzle comprising an acrylic resin in an ink jet recording head 226 is brought into contact with the Langmuir film. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state. Further, the nozzle may be submerged into the water to some extent. Fig. 14 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer the LB film of a fluoropolymer to the surface of the nozzle.

Fig. 15 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 14 (c). When the surface of the nozzle was brought into contact with the surface of water, the LB film of a fluoropolymer 231 was transferred to the surface of the nozzle only at a portion which had been brought into contact with the LB film and the Langmuir film 225 positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour, and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110°C to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at



22 JUL 1998

70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.


Example H2

Fig. 4 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 3 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 13 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 13 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel not subjected to the treatment. Fig. 13 (b) shows a state obtained when a high polymer of a polydiperfluoroalkyl fumarate/polydiisopropyl fumarate (4 : 1) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, the spread film is compressed to form a Langmuir film and a LB film having a three-layer structure is formed on the surface of a nozzle plate and the LB film is heat-treated at 180°C for one hour. The observation under a microscope has revealed that the formed thin film was very dense and

22 JUL 1998

This Sheet Has Been Replaced



- 19 -

homogeneous. The film had a contact angle of 108° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 13 (c) shows a state obtained when the nozzle plate subjected to the above-described treatment for rendering the surface of the nozzle water-repellent and a first substrate comprising a polysulfone resin are washed and dried and then bonded to each other with an adhesive.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example H3

A high polymer of a polydiperfluoroalkyl fumarate/polyvinyl ester copolymer (9 : 1) was dissolved in a fluorocarbon solvent, the solution was spread on the surface of water, and the resultant film was compressed to form a Langmuir film which was then transferred to the surface of a nozzle in the same manner as that of Example H1. The above step of transfer was repeated four times, and the transferred LB film was heat-treated at 120°C for one hour. The observation under a microscope has

22 JUL 1998

- 20 -

revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 105° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a pigment ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a pigment ink. As a result, the contact angle of the recording head to water was 95° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Industrial Applicability

The ink jet recording head of the present invention can be widely applied as a recording head to be mounted on an ink jet recording device such as an ink jet printer.

22 JUL 1998



- 21 -

CLAIMS

1. An ink jet recording head for use in an ink jet recording device, wherein a water-repellent layer comprising a homogeneous layer comprising an LB film of a fluoropolymer is formed on the surface of a nozzle for jetting an ink.
2. An ink jet recording head according to claim 1, wherein the water-repellent layer comprises a solvent-soluble fluoropolymer.
3. An ink jet recording head according to claim 2, wherein the solvent-soluble fluoropolymer has a fluorine atom in substantially all its molecular ends.
4. An ink jet recording head according to claim 1, wherein the water-repellent layer is formed through a coupling compound layer.
5. An ink jet recording head according to claim 1, wherein the water-repellent layer comprises an alternating copolymer of a fluoroethylene with a hydrocarbon ethylene or its analogue or derivative.
6. An ink jet recording head according to claim 1, wherein the water-repellent layer comprises a fluorocyclic polymer.
7. A process for producing an ink jet recording head for use in an ink jet recording device, comprising subjecting the surface of a nozzle for jetting an ink of the ink jet recording head to a treatment for rendering the surface of the nozzle water-repellent, characterised in that the process comprises the steps of:
preparing a polymer solution of a fluoropolymer dissolved in
a solvent;



22 JUL 1998

- 22 -

spreading the polymer solution on the surface of water;

evaporating the solvent in the thus spread polymer solution to form a Langmuir film from the resultant spread film;

bringing the resultant Langmuir film into contact with the surface of the nozzle to transfer the resultant Langmuir film therein to form an LB film on a predetermined portion of the surface of the nozzle.

8. A process according to claim 7, wherein, after the transfer of the polymer layer, the transferred polymer layer is heat-treated.

9. A process according to claim 7, wherein, prior to the transfer of the polymer layer, a coupling layer is formed on the surface of the nozzle.

10. A process according to claim 7, wherein the surface of the transfer medium is smooth.

11. A process according to claim 7, wherein the coupling compound layer is formed by immersing a nozzle in a coupling solution comprising a coupling compound and a solvent.

12. A process according to claim 7, wherein, after exposure of the nozzle to an ozone atmosphere, the coupling layer is formed and the water-repellent layer is then formed.

13. A process according to claim 7, wherein, after exposure of the nozzle to an ozone atmosphere, the water-repellent layer is formed through transfer.

22 JUL 1998

- 1 -

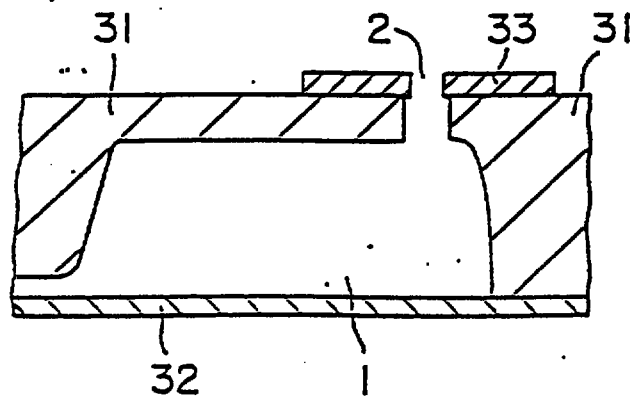


FIG. 1



22 JUL 1998

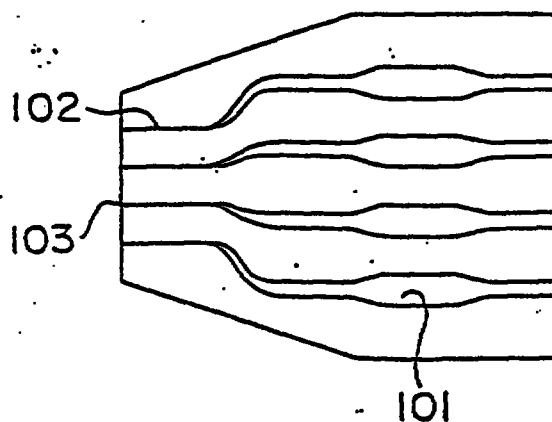


FIG. 2

FIG. 3 (a)

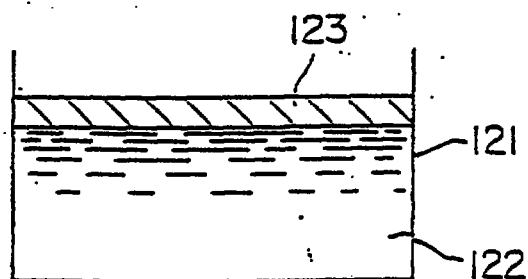


FIG. 3 (b)


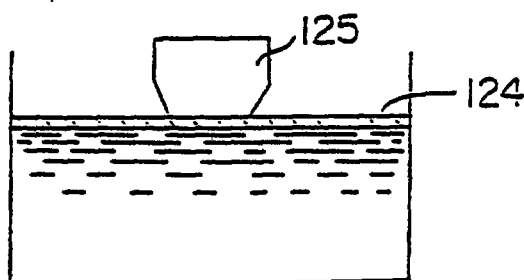


FIG. 3 (c)



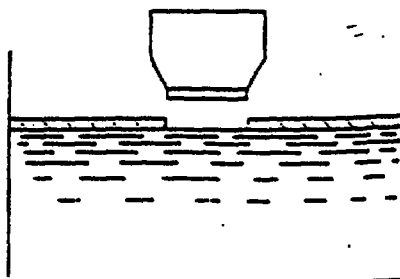

22 JUL 1998




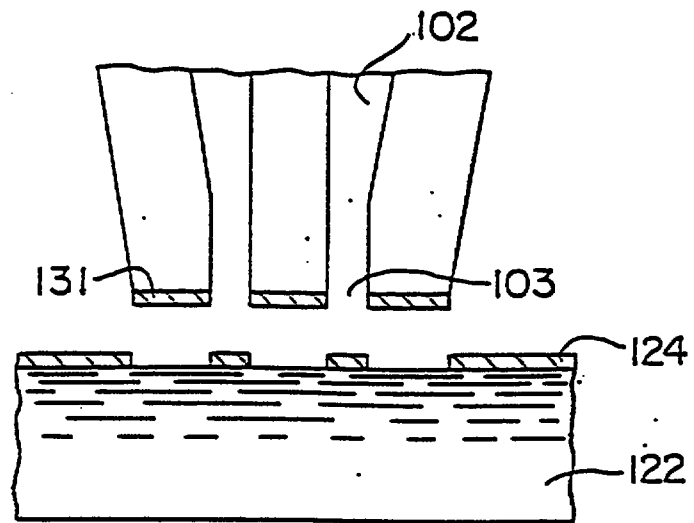


FIG. 4

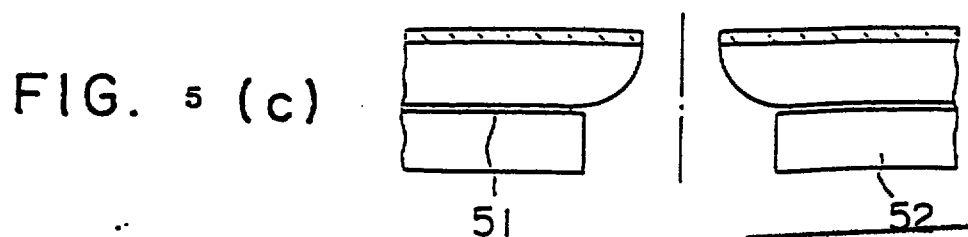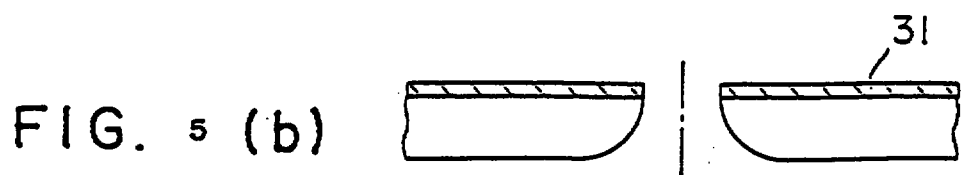

THIS SHEET HAS BEEN
REPLACED

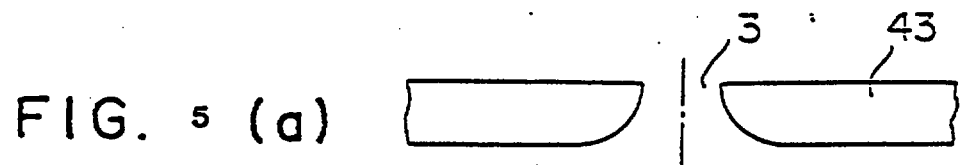

22 JUL 1998

FIG. 6 (a)

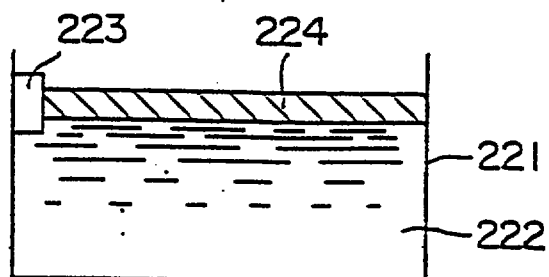


FIG. 6 (b)

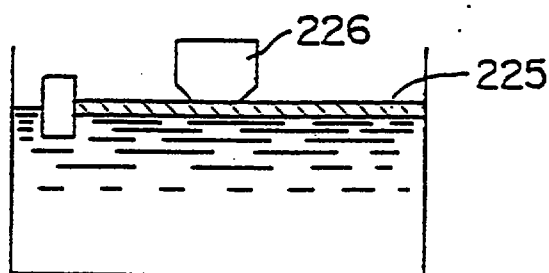


FIG. 6 (c)


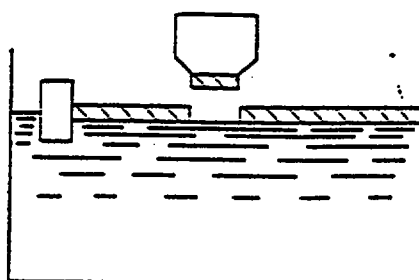


FIG. 7

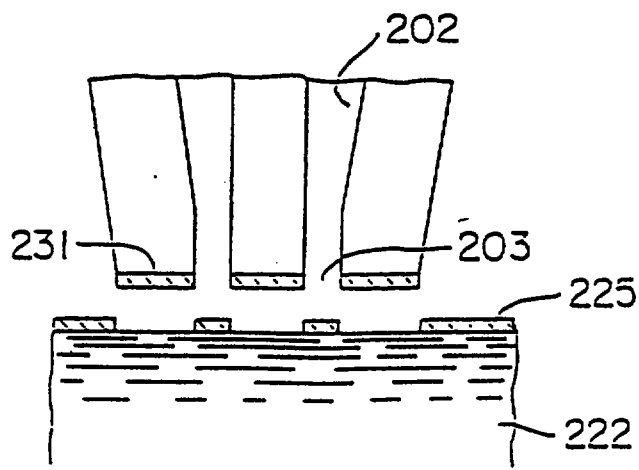

12 JAN 1999

- 1 -

INK-JET PRINTING HEAD AND METHOD OF MAKING SAID HEADDescriptionTechnical Field

The present invention relates to an ink jet recording head having an excellent water repellency for use in an ink jet recording device and a process for producing the same.

Background Art

A material such as glass, a metal or a resin is used for an ink jet recording head.

In the use of a water-based ink in an ink jet recording head, when the water repellency of the surface of a nozzle is unsatisfactory, droplets of an ink are liable to adhere to the surface of the nozzle, which spoils the rectilinearity of jetted ink droplets, so that it often becomes impossible to conduct recording due to occurrence of troubles such as disturbance of setting.

For this reason, the surface of a nozzle which is a portion for jetting an ink has hitherto been subjected to a treatment for rendering the surface of the nozzle water-repellent. For example, a proposal has been made on a method wherein a particle of a water-repellent material is deposited on the surface of a nozzle, for example, by using a dispersion of carbon fluoride particles in an epoxy matrix (see Japanese Patent Application Laid-Open No. 157765/1982) and vacuum baking and plasma polymerization (see Japanese Patent Application Laid-Open Nos. 183161/1985 and 176059/1984) to render the surface of the nozzle water-repellent.

In the above-described conventional treatment for rendering the surface of the nozzle water-repellent, it is not always easy to form a smooth repellent surface free from any defect such as a pinhole. This causes properties to be varied from product to product, and the properties to change with the elapse of time. Further, in the electrostatic powder coating, the baking

REPLACEMENT SHEET

12 JAN 1999

- 23 -

REPLACEMENT SHEET

INK-JET PRINTING HEAD AND METHOD OF MAKING SAID HEAD

ABSTRACT

The present invention provides an ink jet recording head for use in an ink jet recording device, wherein a water-repellent layer (21) comprising a homogeneous layer of a fluoropolymer is formed on the surface of a nozzle for jetting an ink. This water-repellent layer can be formed as a dense, homogeneous layer through the use of a solvent-soluble fluoropolymer, which enables an ink jet recording head excellent in the water-repellent property, the persistence of the water repellency and the durability.

Figure 3a, 3b, 3c.

30 APR 1999

temperature should be 300°C or above. In the case of a metal, the dimensional accuracy is spoiled, and it is impossible to apply this method to a resin. When use is made of vacuum deposition, a large device should be used and it is difficult to conduct the process control. Further, in this method, since the bonding strength is insufficient, only a product having an insufficient bonding strength can be obtained.


The present invention can solve the above-described problem, and an object of the present invention is to provide an ink jet recording head which is excellent in the water repellency of the surface of the nozzle, the persistence of the water repellency and the durability and enables a high printing quality to be maintained for a long period of time, and a process for producing the same.

Ink jet recording devices in which a water-repellent layer of a fluoropolymer is formed on the surface of a nozzle are disclosed in JP-A 62-202743, in IBM Technical Disclosure Bulletin, Vol. 22, No. 5, October 1979, Pages 1965 and 1966, and in JP-A 58-124661.

Disclosure of the Invention

The present invention provides an ink jet recording head for use in an ink jet recording device, wherein a water-repellent layer comprising a homogeneous layer comprising an LB film of a fluoropolymer is formed on the surface of a nozzle for jetting an ink.

The invention also provides a process for producing an ink jet recording head for use in an ink jet recording device, comprising subjecting the surface of a nozzle

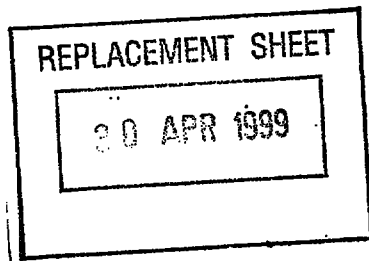

REPLACEMENT SHEET

- 9 -

Even in a failure in operation, the inner diameter of the nozzle is merely reduced by the film thickness of the water surface spread film, so that the water surface spread film enters the inside of the nozzle by the same distance as the inner diameter of the nozzle at the maximum. Ink repellency can be attained even when the thickness of the fluoropolymer film is as small as about 10nm (100 Å). Since the nozzle diameter is 100 μm or less, there occurs no problem in the practical use.

The water surface spread film of a fluoropolymer has a sufficient film strength. A sufficient film strength can be obtained by transferring a water surface spread film of a fluoropolymer on the surface of a nozzle and heat-treating the transferred film. If necessary, the transfer of the water surface spread film of a fluoropolymer on the surface of the nozzle can be repeated a plurality of times for the purpose of enhancing the ink repellency.

Example G1

Fig. 2 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 3 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 3 (a) shows a state obtained when "Teflon AF" (manufactured by De Pont (E.I.) de Nemours & Co) is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water. Although the concentration of the solution and the amount

30 APR 1999

- 10 -

of dropping of the solution can be suitably selected, in this example, a solution having a concentration of 0.05 % by weight was prepared, the amount of solution capable of forming a 0.1 μm -thick polymer layer of "Teflon AF" was calculated, and the solution in the determined amount was dropped on the surface of water. Fig. 3 (b) shows a state obtained when the surface of a nozzle comprising an acrylic resin is brought into contact with the water surface spread film of a fluoropolymer formed by evaporating the fluorocarbon solvent. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state. Further, the nozzle may be submerged into the water to some extent. Fig. 3 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer a water surface spread film of a fluoropolymer to the surface of the nozzle.

Fig. 4 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 3 (c). When the surface of the nozzle was brought into contact with the surface of water, the water surface spread film of a fluoropolymer was transferred to the surface of the nozzle only at a portion which had been brought into contact with the water surface spread film and the water surface spread film positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour, and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 100° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.


The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted.

30 APR 1999

As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G2

Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 3 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate. Fig. 5 is a typical cross-sectional views showing the steps of rendering the surface of a nozzle water-repellent. Fig. 5 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate 43 comprising nickel prior to the treatment. Fig. 5 (b) shows a state obtained when "CYTOP" (manufactured by Asahi Glass Co., Ltd.) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, a 0.05 μ m-thick water surface spread film 31 of a fluoropolymer formed on the surface of water is transferred on the

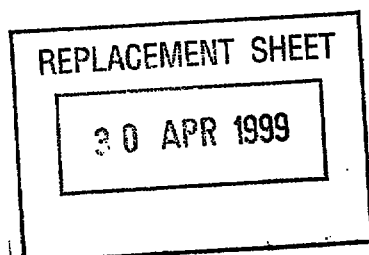

surface of a nozzle plate and the transferred film is heat-treated at 180°C for one hour. The observation of the thin film under a microscope has revealed that the formed thin film was very dense and homogeneous. The film had a contact angle of 108°C to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 5 (c) shows a state obtained when the nozzle plate subjected to the above-described surface treatment for rendering the surface of the nozzle water-repellent and a first substrate 52 comprising a polycarbonate resin are washed and dried and then bonded to each other with an adhesive 51.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example G3

A high polymer of a diperfluoroalkyl fumarate/dialkyl fumarate copolymer was dissolved in a fluorocarbon solvent, and the solution was spread on the surface of water. The resultant water spread film of a


30 APR 1999

The LB film of a fluoropolymer has a sufficient film strength. Since the LB film is formed by a horizontal deposition method, no layer of water or the like is present between the surface of the nozzle and the LB film of a fluoropolymer, so that a satisfactory bonding strength can be obtained. If possible, it is preferred for the film to be heated to a temperature not below the glass transition temperature of the fluoropolymer.

Example H1

Fig. 2 is a schematic view of an ink jet recording head. Numeral 101 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 102 designates an ink passage, and numeral 103 designates an ink jet nozzle.

Fig. 6 is a typical cross-sectional view showing the step of treatment for rendering the surface of a nozzle water-repellent. Fig. 6 (a) shows a state (224) obtained when a polydiperfluoroalkyl fumarate is dissolved in a fluorocarbon solvent and the solution is spread on the surface of water.

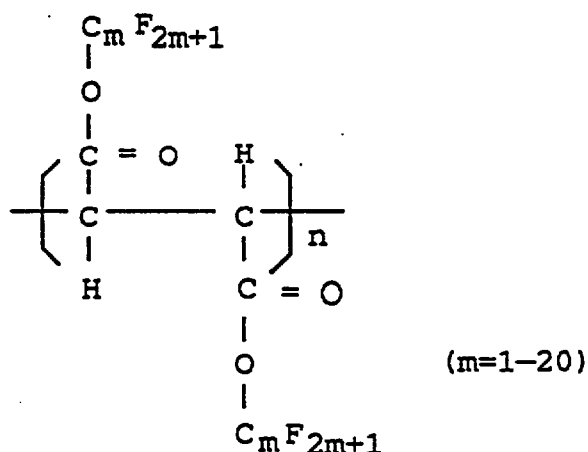

With respect to the concentration of the solution and the amount of dropping of solution, a preliminary experiment was conducted to prepare a π -A curve, the amount of the solution necessary for forming on the surface of water a monomolecular layer having an area of half of the area of

30 APR 1999

the surface of water was calculated, and the solution in the calculated amount was dropped on the surface of water. Fig. 6 (b) shows a state obtained when after evaporation of the fluorocarbon solvent, a barrier 223 is moved to form a Langmuir film 225 and the surface of a nozzle comprising an acrylic resin in an ink jet recording head 226 is brought into contact with the Langmuir film. It is not always necessary that the surface of the nozzle be brought into contact with the surface of water in a parallel manner, and the surface of the nozzle may be brought into contact with the surface of water in a slightly inclined state. Further, the nozzle may be submerged into the water to some extent. Fig. 6 (c) shows a state obtained when a nozzle is pulled up from the surface of water to transfer the LB film of a fluoropolymer to the surface of the nozzle.

Fig. 7 is an enlarged view of the nozzle portion for jetting an ink shown in Fig. 6 (c). When the surface of the nozzle was brought into contact with the surface of water, the LB film of a fluoropolymer 231 was transferred to the surface of the nozzle only at a portion which had been brought into contact with the LB film and the Langmuir film 225 positioned at the hole of the nozzle was left as it was on the surface of water. The transferred film was heat-treated at 150°C for one hour, and then observed under a microscope. As a result, it was confirmed that the formed thin film was very dense and homogeneous. The film had a contact angle of 110° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at

30 APR 1999

70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example H2

Fig. 1 is a typical cross-sectional view of an embodiment of an ink jet recording head. Numeral 1 designates a pressure chamber which is a portion for obtaining a pressure used in the ejection of an ink by means of a PZT element or a heating element. Numeral 2 designates an ink jet nozzle. Numeral 31 designates a first substrate provided with a pattern groove for an ink passage. Numeral 32 designates a second substrate. An ink passage is formed by laminating both members on top of the other. Numeral 33 designates a nozzle plate.

Fig. 5 is a typical cross-sectional view showing the step of a treatment for rendering the surface of a nozzle water-repellent. Fig. 5 (a) is an enlarged view of the vicinity of a nozzle in a nozzle plate comprising nickel not subjected to the treatment. Fig. 5 (b) shows a state obtained when a high polymer of a polydiperfluoroalkyl fumarate/polydiisopropyl fumarate (4 : 1) is dissolved in a fluorocarbon solvent, the solution is spread on the surface of water, the spread film is compressed to form a Langmuir film and a LB film having a three-layer structure is formed on the surface of a nozzle plate and the LB film is heat-treated at 180°C for one hour. The observation under a microscope has revealed that the formed thin film was very dense and

30 APR 1999

homogeneous. The film had a contact angle of 108° to water, that is, a high water repellency. Further, it was confirmed that the inside of the nozzle was subjected to no treatment for rendering it water-repellent. Fig. 5 (c) shows a state obtained when the nozzle plate subjected to the above-described treatment for rendering the surface of the nozzle water-repellent and a first substrate comprising a polysulfone resin are washed and dried and then bonded to each other with an adhesive.

The ink jet recording head thus produced was mounted on a recording device, and a setting test was conducted. As a result, neither omission of dot nor disturbance of setting occurred. That is, it was confirmed that the nozzle was successfully rendered water-repellent. Then, the ink jet recording head was immersed in a dye ink at 70°C for 5 days, and a setting test was conducted in the same manner as that described above. The setting quality was the same as the initial property. That is, the recording head maintained a sufficient ink repellency. A rubbing test was conducted through the use of a silicone rubber while injecting a dye ink. As a result, the contact angle of the recording head to water was 100° or more after rubbing the recording head 5000 times. Thus, an ink jet recording head which gives rise to substantially no deterioration of the water repellency and can provide a high setting quality for a long period of time could be realized.

Example H3

A high polymer of a polydiperfluoroalkyl fumarate/polyvinyl ester copolymer (9 : 1) was dissolved in a fluorocarbon solvent, the solution was spread on the surface of water, and the resultant film was compressed to form a Langmuir film which was then transferred to the surface of a nozzle in the same manner as that of Example H1. The above step of transfer was repeated four times, and the transferred LB film was heat-treated at 120°C for one hour. The observation under a microscope has

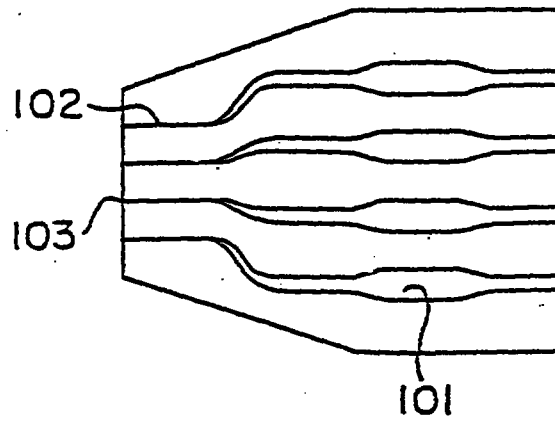


FIG. 2

FIG. 3 a

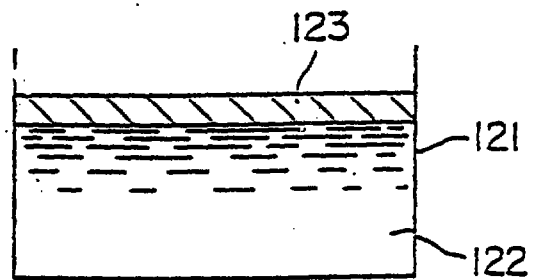


FIG. 3 b

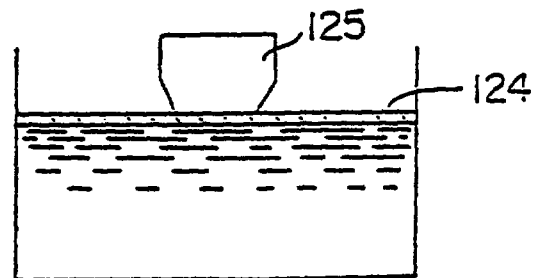
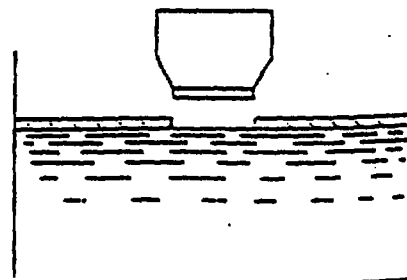


FIG. 3 c







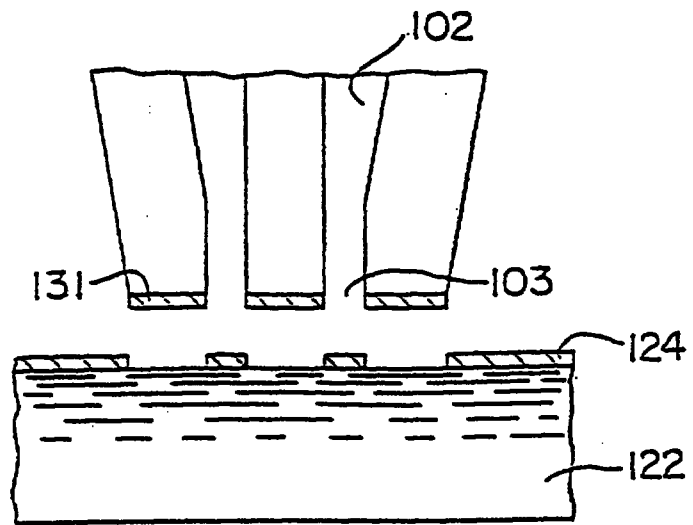


FIG. 4

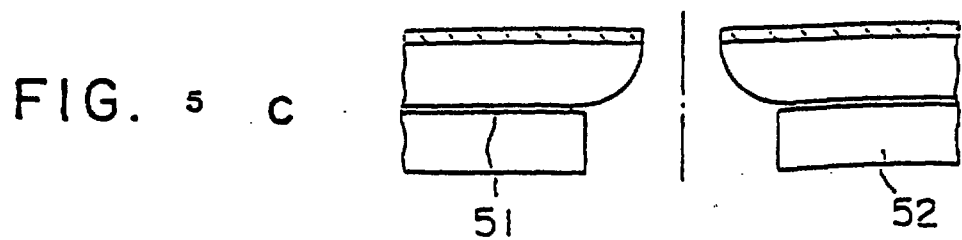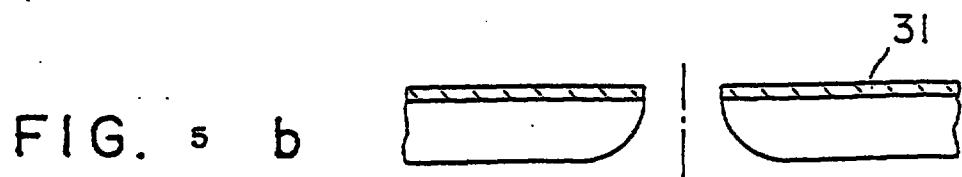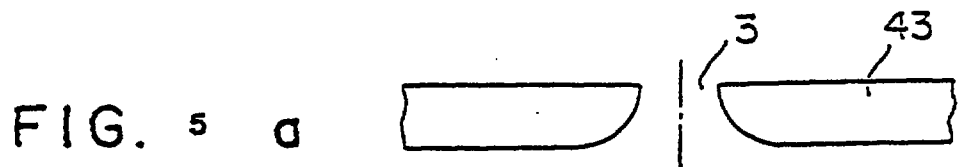

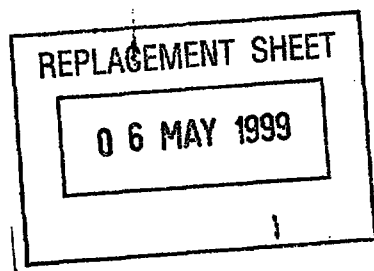

REPLACEMENT SHEET

- 4 -

FIG. 6 a

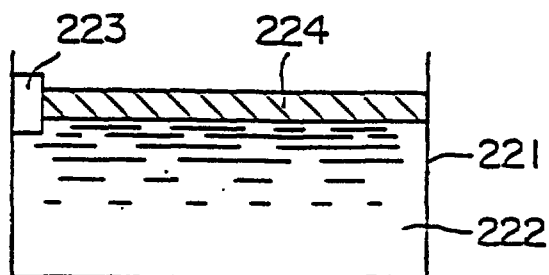


FIG. 6 b

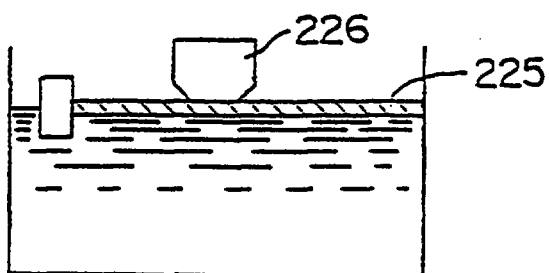


FIG. 6 c

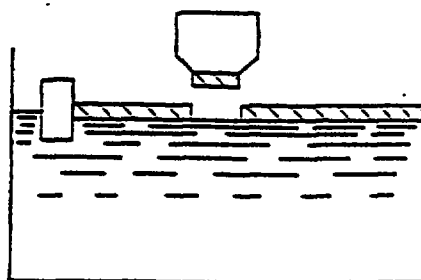


FIG. 7

