

(51) International Patent Classification:  
*H04W 8/08* (2009.01)(21) International Application Number:  
PCT/US2013/073046(22) International Filing Date:  
4 December 2013 (04.12.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
61/737,575 14 December 2012 (14.12.2012) US  
13/827,996 14 March 2013 (14.03.2013) US(71) Applicant: IBASIS, INC. [US/US]; 20 Second Avenue,  
Burlington, MA 01803 (US).(72) Inventors: XU, Richard, H.; 6 Blue Jay Circle, Unit 1,  
Wakefield, MA 01880 (US). TANG, Hwan, Jang; 223  
Laws Brook Road, Apt. 110, Concord, MA 01742 (US).  
JOSEPH, Ajay; 46 Golden Avenue, Lexington, MA  
02421 (US).(74) Agents: MEAGHER, Timothy, J. et al.; Hamilton, Brook,  
Smith & Reynolds, P.C., 530 Virginia Rd., P.O. Box 9133,  
Concord, MA 01742-9133 (US).(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,  
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,  
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,  
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,  
ZW.(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,  
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,  
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND SYSTEM FOR HUB BREAKOUT ROAMING

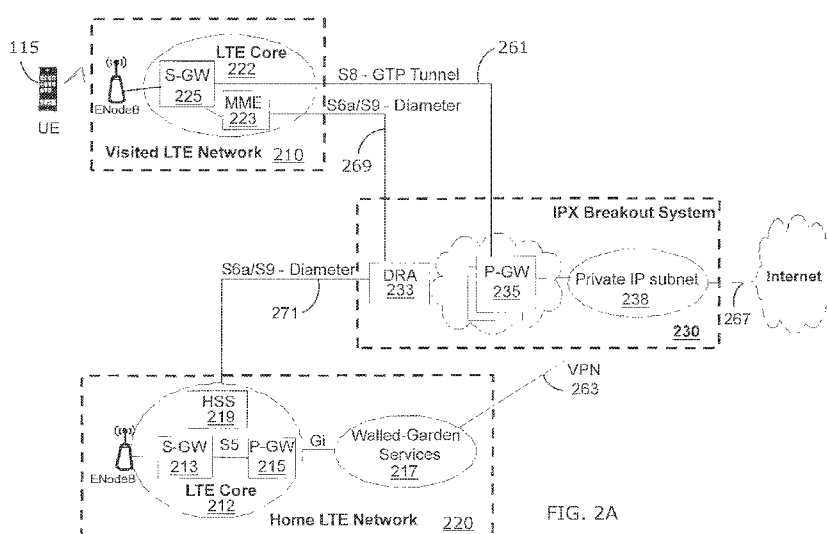


FIG. 2A

(57) Abstract: According to at least one example embodiment, hub breakout roaming enables providing data access to a user network device, subscribed with a home network and roaming into a visited network, by a hub breakout system through the visited network. Upon receiving a request for data access from the visited network, the hub breakout system assigns an IP address to the user network device. The hub breakout system then routes data packets, associated with the data access requested by the user network device, to and from at least one corresponding data source, using the assigned IP address. The data source includes the Internet, a private network associated with home network, or any other service provider entity.