(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
4 April 2002 (04.04.2002)

PCT

(10) International Publication Number
WO 02/27483 A2

(51) International Patent Classification[7]: G06F 9/38

(21) International Application Number: PCT/US01/42367

(22) International Filing Date:
26 September 2001 (26.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/675,569 29 September 2000 (29.09.2000) US

(71) Applicants: **INTEL CORPORATION** [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US). **ANALOG DEVICES, INC.** [US/US]; One Technology Way, P.O. Box 9106, Norwood, MA 02062 (US).

(72) Inventors: **SINGH, Ravi, P.**; 12349 Metric Boulevard #829, Austin, TX 78758 (US). **ROTH, Charles, P.**; 13305 Tichester Court, Austin, TX 78729 (US). **OVERKAMP, Gregory, A.**; P.O. Box 163442, Austin, TX 78716 (US).


(74) Agent: **HARRIS, Scott, C.**; Fish & Richardson P.C., Suite 500, 4350 La Jolla Village Drive, San Diego, CA 92122 (US).

(81) Designated States *(national)*: CN, JP, KR, SG.

Published:
— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A FIFO WRITE/LIFO READ TRACE BUFFER WITH SOFTWARE AND HARDWARE LOOP COMPRESSION

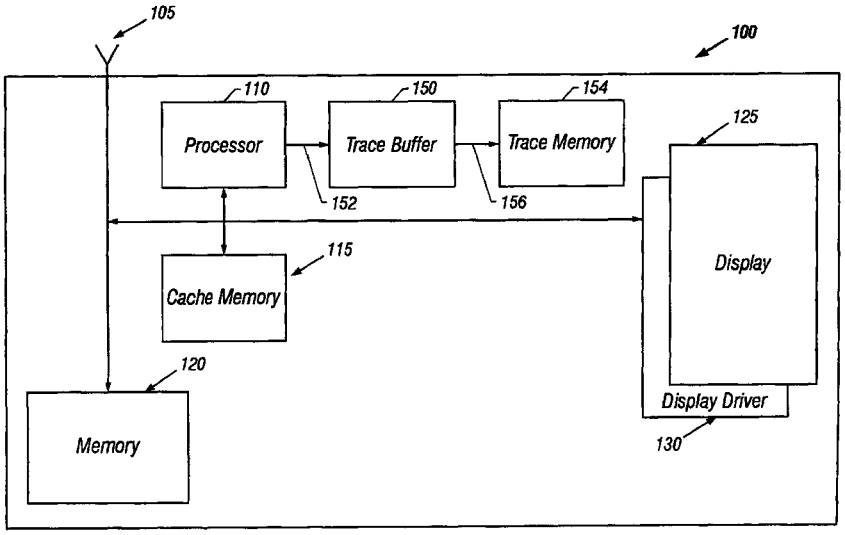

(57) Abstract: In one embodiment, a trace buffer circuit for use with a pipelined digital signal processor (DSP) may include a series of interconnected registers that operate as a first-in first-out (FIFO) register on a write operation and a last-in first-out (LIFO) register on a read operation. On the write operation, a branch target/source address pair may be written to a first pair of trace buffer registers and, the contents of each register may be shifted two registers downstream. On the read operation, one instruction address may be read from a top register, and the contents of each register may be shifted one register upstream. The trace buffer may also include structure to enable compression of hardware and software loops in the program flow. A valid bit may be assigned to each instruction address in the trace buffer and a valid bit buffer with a structure parallel to that of the trace buffer may be provided to track the valid bits.

WO 02/27483 A2