

Q-1247 2
1001

CHARACTER PATTERN DATA GENERATING DEVICE

The present invention relates to a character pattern data generating device.

Improvements in printing resolution of printers have promoted many kinds of font to be developed and used, and to actually use various fonts, numerous kinds of bit pattern data must be stored. Because a means for storing these data must necessarily be of large capacity, the cost will be increased.

As a solution to the problem, a bit pattern data generating device has been proposed. First, this device makes a preparation by storing the pattern of a character or a graphic in the form of coordinate data of its outline, or the so-called "outline data," in a storage means; reading the outline data of a required font through a keyboard at printing or prior to displaying; generating bit pattern data based on the read outline data; and temporarily storing the generated bit pattern data in a random access memory (RAM). Thereafter, this device reads the bit pattern data stored in the RAM through an externally applied character code signal thereby to

This Sheet Has Been Replaced



- 1 -

THIS SHEET HAS BEEN
REPLACED

cause the character or graphic pattern to be printed with the desired font.

According to this device, the capacity of the storage means for storing fonts can be curtailed, thereby contributing to reducing the cost; however, the additional procedural operation for generating bit pattern data and temporarily storing the generated bit pattern data is required every time the printer or display unit is started, thereby being disadvantageous to the user in that it entails the additional, repetitive operation.

An object of the present invention is to overcome the above problem and thereby to provide an improved novel bit or character pattern data generating device. This object is solved by the character pattern data generating device of independent claim 1. Further advantageous features of this device are evident from the dependent claims. These claims are intended to be a first non-limiting approach of describing the invention in general terms. In the device of the invention required fonts are stored in a non-volatile memory as attribute data and a font is generated automatically based on the attribute data at the time of starting the printer thereby to dispense with the cumbersome operation of specifying the character generation. The invention provides a device for producing bit pattern data adapted to displaying and printing a character or pattern corresponding to a character code signal based on bit map data.

Further features and advantages of the invention will become evident from the following description and the drawings.

Fig. 1 is a block diagram showing a device that is an embodiment of the present invention;

Fig. 2 is a schematic representation showing an embodiment of a menu data storage circuit in the device of Fig. 1;

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

Fig. 3 is a schematic representation showing the structure of a circuit for storing set data;

Fig. 4 is a front view showing an embodiment of a panel screen in the device of Fig. 1;

Fig. 5 is a flow chart showing the operation when the font creating data is stored in the device of Fig. 1; and

Fig. 6 is a diagram explaining the process of generating a character in the device of Fig. 1.

Fig. 1 shows an embodiment of the present invention. Referring to the figure, reference numeral 1 designates an outline data storage unit, in which outlines of characters and graphics are stored as coordinate data; and 2, a bit pattern data storage unit, which erasably maintains bit pattern data generated by a microcomputer 3 (described later) based on the outline data; thus it is made up of a RAM.

Reference numeral 3 designates the microcomputer including a central processing unit (CPU) 4, a read only memory (ROM) 5, and a RAM 6; 7, a menu data storage circuit, which includes, as shown in Fig. 2, a mode selection area 20 for selecting a mode, e.g., "font creation" out of various modes; a mode detail area for each mode, which is subdivided into items such as "typeface" 21, "style" 22, "pitch" 23, "thickness" 24, "direction" 25, "point" 26, and "set" 27 in

This Sheet Has Been Replaced



- 3 -

THIS SHEET HAS BEEN
REPLACED

case of the "font creation" mode, and each item contains its own detailed data.

More specifically, the item "typeface" 21 contains data "courier" 31, "prestige" 32, "modern" 33, "gothic" 34; the item "style" 22 contains data "upright" 35, "italics" 36; the item "pitch" 23 contains pitch data 37 from 3.0 CPI to 20.0 CPI every 0.1 pitch and "proportional" 38; the item "thickness" 24 contains data "hair" 39, "light" 40, "medium" 41, "bold" 42, "demibold" 43, and "extra bold" 44; the item "direction" 25 contains data "portrait" 45 and "landscape" 46; the item "point" 26 contains data 47 indicating the size of points from 5.0 to 24 points every 0.5 point; and the item "set" 27 contains data "ON" 48 for specifying that the set data be saved in the storage circuit and data "OFF" 49 for specifying not to save the set data.

Returning to Fig. 1, reference numeral 8 designates a set data storage circuit, which is made up of an erasable nonvolatile memory and consists of areas 50 to 55 in correspondence with the items 21 to 26, a specified attribute area 56, and a base data area 57 as shown in Fig. 3. This base data area 57 is arranged so that it will contain material data for creating the font specified by the specified attribute area 56.

Reference numeral 10 designates the panel screen, which comprises, as shown in Fig. 4, an online selection key 60, a

This Sheet Has Been Replaced



- 4 -

THIS SHEET HAS BEEN
REPLACED

mode selection key 61, cursor movement keys 62, 63, 64, and 65 for selecting the items on the menu screen, a confirmation key 66, a key 67, and a display unit 68 of a liquid crystal system or the like.

The operation of the bit pattern data generating device thus constructed will be described with reference to the flow chart shown in Fig. 5.

[Registration of the font]

Upon turning the power on (Step 100) the microcomputer 3 is set to the print mode as a default. When the mode selection key 61 is pressed under this condition (Step 101), the microcomputer 3 prompts for mode setting without generating characters. When, e.g., the cursor movement keys 64 and 65 for vertical movement out of the keys 62 to 66 are pressed, the respective modes stored in the menu data storage circuit 7 will be sequentially displayed.

When the "font creation" menu is displayed by using the vertical movement keys 64 and 65 (Step 102) and the cursor movement keys 62 and 63 for horizontal movement are pressed, the "typeface" 21, which is the first item of the "font creation" mode 20, is displayed (Steps 103 and 104). As the cursor movement keys 64 and 65 for vertical movement are pressed under this condition, the detailed data "courier" 31, "prestige" 32, "modern" 33, and "gothic" 34 are displayed in the order written on the display unit 68 every time these keys

This Sheet Has Been Replaced



- 5 -

THIS SHEET HAS BEEN
REPLACED

are pressed (Steps 105 and 106). When the confirmation key 66 is pressed with a desired typeface, e.g., "gothic", being displayed in this way (Step 107), the microcomputer 3 temporarily stores this data in a buffer or the like (not shown) and jumps to Step 103. Upon completion of the registration of the item "typeface" 21, the cursor movement keys 64 and 65 for vertical movement are pressed. Then, the next item "style" 22 will be displayed. As the cursor movement keys 62 and 63 for horizontal movement are pressed with the "style" 22 being displayed on the screen and subsequently the cursor movement keys 64 and 65 for vertical movement are pressed, the detailed data, "upright" 35 and "italics" 36, are displayed on the display unit 66 in the order of the pressed keys. If the confirmation key 68 is pressed with "italics" 36 being displayed, the microcomputer 3 temporarily stores "italics" 36 in the buffer or the like.

Upon completion of the setting of one item in this way, the cursor movement keys are operated to move on to the next item and specify attributes as required on the item, and the confirmation key is pressed to confirm the specification.

In line with the specification of the attributes, base data necessary to generate the character having the specified attributes must also be specified.

When the setting of the items in the "font creation" mode has been completed up to the item "point," the item "set"

This Sheet Has Been Replaced



- 6 -

THIS SHEET HAS BEEN
REPLACED

27 is called (Step 108). As its detailed data "ON" 48 is selected (Step 109), the microcomputer 3 transfers the data of the selected item from the buffer to the set data storage circuit 8, and sets the data "gothic," "italics," "10 CPI," "medium," "landscape," and "12" to the set attribute area 56, and the data "gothic," "upright," "10 CPI," "medium," "portrait," and "12" to the base data area 57, as shown in Fig. 3 (Step 110).

If the data "OFF" is selected in the item "set" (Step 111), the microcomputer 3 discards the data just specified (Step 112) and jumps to Step 103.

[Normal mode]

When the power is turned on to start the bit pattern data generating device with the data necessary to create a font stored in the set data storage circuit 8 (Step 100), the microcomputer 3 first accesses the set data storage circuit 8 to read the stored "font creation" data (Step 113) and checks whether or not the font of specified base data (Fig. 3) has been prepared (Step 114). If the font that serves as the basis for a font to be created does not exist, the operation is terminated. Conversely, if the base data does exist, the operation of creating a new font is executed based on the specified base data (Step 115). In parallel with this operation, the operation of warming up a printing mechanism (not shown) will be performed.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

The above-described process of generating a character will now be described taking the character "P" shown in Fig. 6 as an example. The microcomputer 3 reserves an area 70 for storing one character in the work area to create an italicized character and reads the standard font data "P" from the outline data storage unit 1. The font data "P" is then converted to bit pattern data 71 to create the base data (part I of Fig.6). The bit pattern data 71 is provided with a reference point 72 referencing a predetermined printing area and a base line 73. Upon creation of the base data in this way, a work area 74 for a next character will be reserved thereby to create bit pattern data 75 for the italicized character based on the base data (part I). The bit pattern data 75 thus created is likewise provided with a reference point 76 referencing a predetermined printing area and a base line 77. According to the data 75, the character "P" will be created so that the portion over the base line 77 is shifted to the right from the reference point and the portion below the base line is shifted to the left (part II).

The landscape character of the character "P" will be generated by creating data in which the bit pattern data 75 is 90° rotated (part III).

In this way, when the bit pattern data of all the characters are stored in the bit pattern data storage circuit 2 (Step 116), printing is ready (Step 117). Thus, character

This Sheet Has Been Replaced



- 8 -

THIS SHEET HAS BEEN
REPLACED

fonts can be prepared automatically without being specified by the user.

[Change of the character fonts]

To alter the font that has already been specified at the start, e.g., "italics" in the item "style" to "upright," first, the "font creation" mode is selected by pressing the mode selection key 61 on the panel screen 10 as described previously. Then, calling the items 21 to 26 by operating the cursor movement keys 62 and 63 for horizontal movement to display the item to be altered, e.g., "style" 22 on the display unit 65. Under this condition, the cursor movement keys 62 and 63 for horizontal movement are pressed again to select and display the target data "upright" 35 on the display unit 66.

Upon completion of all necessary alternations, "set" 27 is selected by operating the cursor movement keys 64 and 65 for vertical movement, and its detailed data of "ON" 48 is selected by the cursor movement keys for horizontal movement.

As a result, the microcomputer 3 updates the data resident in the set data storage circuit 8 by the altered data and exits from the setting mode.

Although the menu items are displayed sequentially on a single item basis to minimize the size of the display unit in this embodiment, in the case where a large display unit is used, it goes without saying that a plurality of menu items may be displayed at once on the display unit and that the item selection is made by the numeric keys or cursor movement keys.

This Sheet Has Been Replaced



- 9 -

THIS SHEET HAS BEEN
REPLACED



CLAIMS

1. A character pattern data generating device, comprising:
means for storing character data to generate a bit
pattern of a required character;

means for externally specifying attribute data of a
font and base data of said required character specified by said
attribute data;

specified data storage means for storing said attribute
data and said base data; and

means for reading data from said specified data
storage means at turning on an electric power source and for
generating new bit pattern data from said bit pattern stored in
said character data storage means.

2. A character pattern data generating device as claimed
in claim 1, further comprising means for storing data for
displaying the kind of said specified data and said base data
in the menu form.

3. A character pattern data generating device as claimed
in claim 1 or 2, further comprising cursor movement keys for
selecting said menu data.


This Sheet Has Been Replaced



ABSTRACT


A device in which bit pattern data for generating bit patterns required for creating various fonts are prepared. The device stores data for specifying the font of a character which is to be prepared for printing in a nonvolatile memory and automatically generates the font by reading the data from the nonvolatile memory at the start of a printer.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

FIG. 1

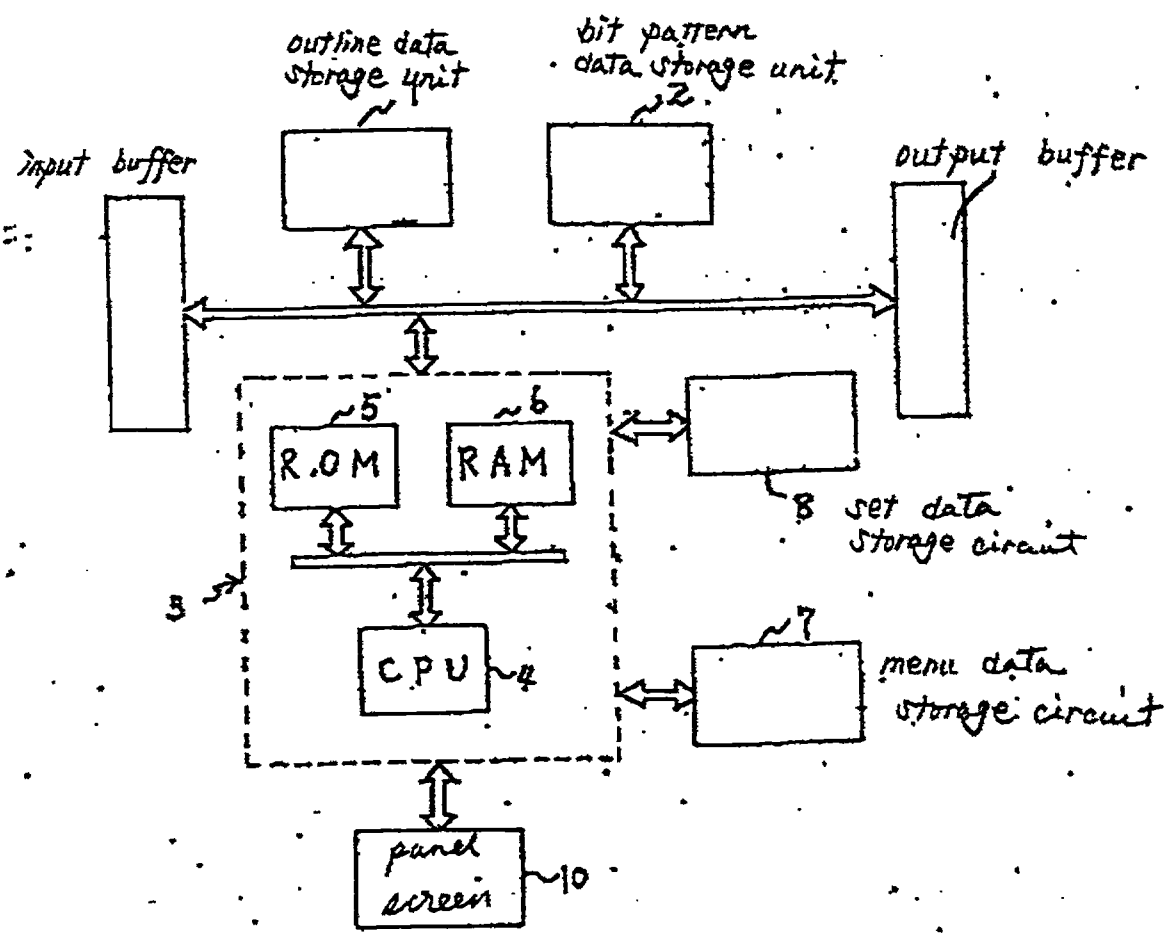

This Sheet Has Been Replaced



THIS SHEET HAS BEEN REPLACED

This Sheet Has Been Replaced



FIG. 2

20		
S1	S2	S3
21 font creation	(1) typeface	(1) ~31-courier
		(2) ~32-prestige
		(3) ~33-modern
		(4) ~34-gothic
22	(2) style	(1) ~35-upright
		(2) ~36-italics
23	(3) pitch	(1) 3.0 cpi (0.18" pitch) ~37
		(2) 20.0 cpi
24	(4) thickness	(1) ~38-proportional
		(2) ~39-thin
		(3) ~40-light
		(4) ~41-medium
		(5) ~42-bold
		(6) ~43-demibold
25	(5) direction	(1) ~44-extra bold
		(2) ~45-portrait
26	(6) point	(1) ~46-landscape
		(2) ~47
27	(7) set	(1) 5.0 (0.5" pitch) ~48
		(2) 24.0
mode 2		(1) ON ~49
		(2) OFF
mode 3		

FIG. 3.

specified attribute

56

57 base data

typeface ~ 50

style ~ 51

pitch ~ 52

thickness ~ 53


direction ~ 54

point ~ 55


	gothic	gothic
	italics	upright
10 cpi		10 cpi
	medium	medium
		portrait
12'		12

landscape

FIG. 4.

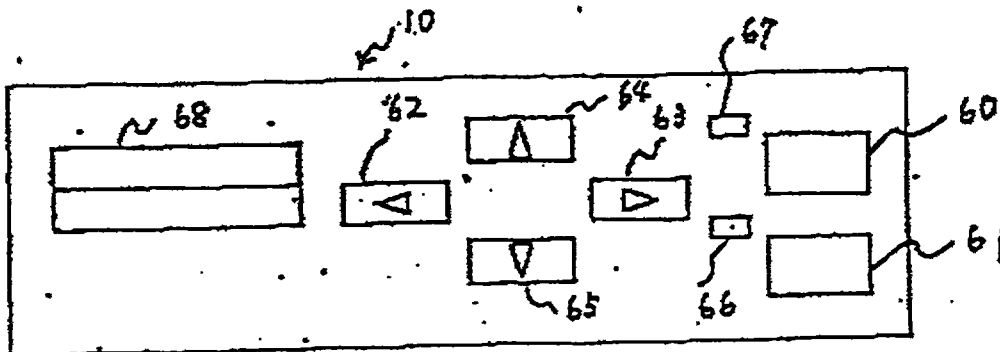

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED



FIG. 5



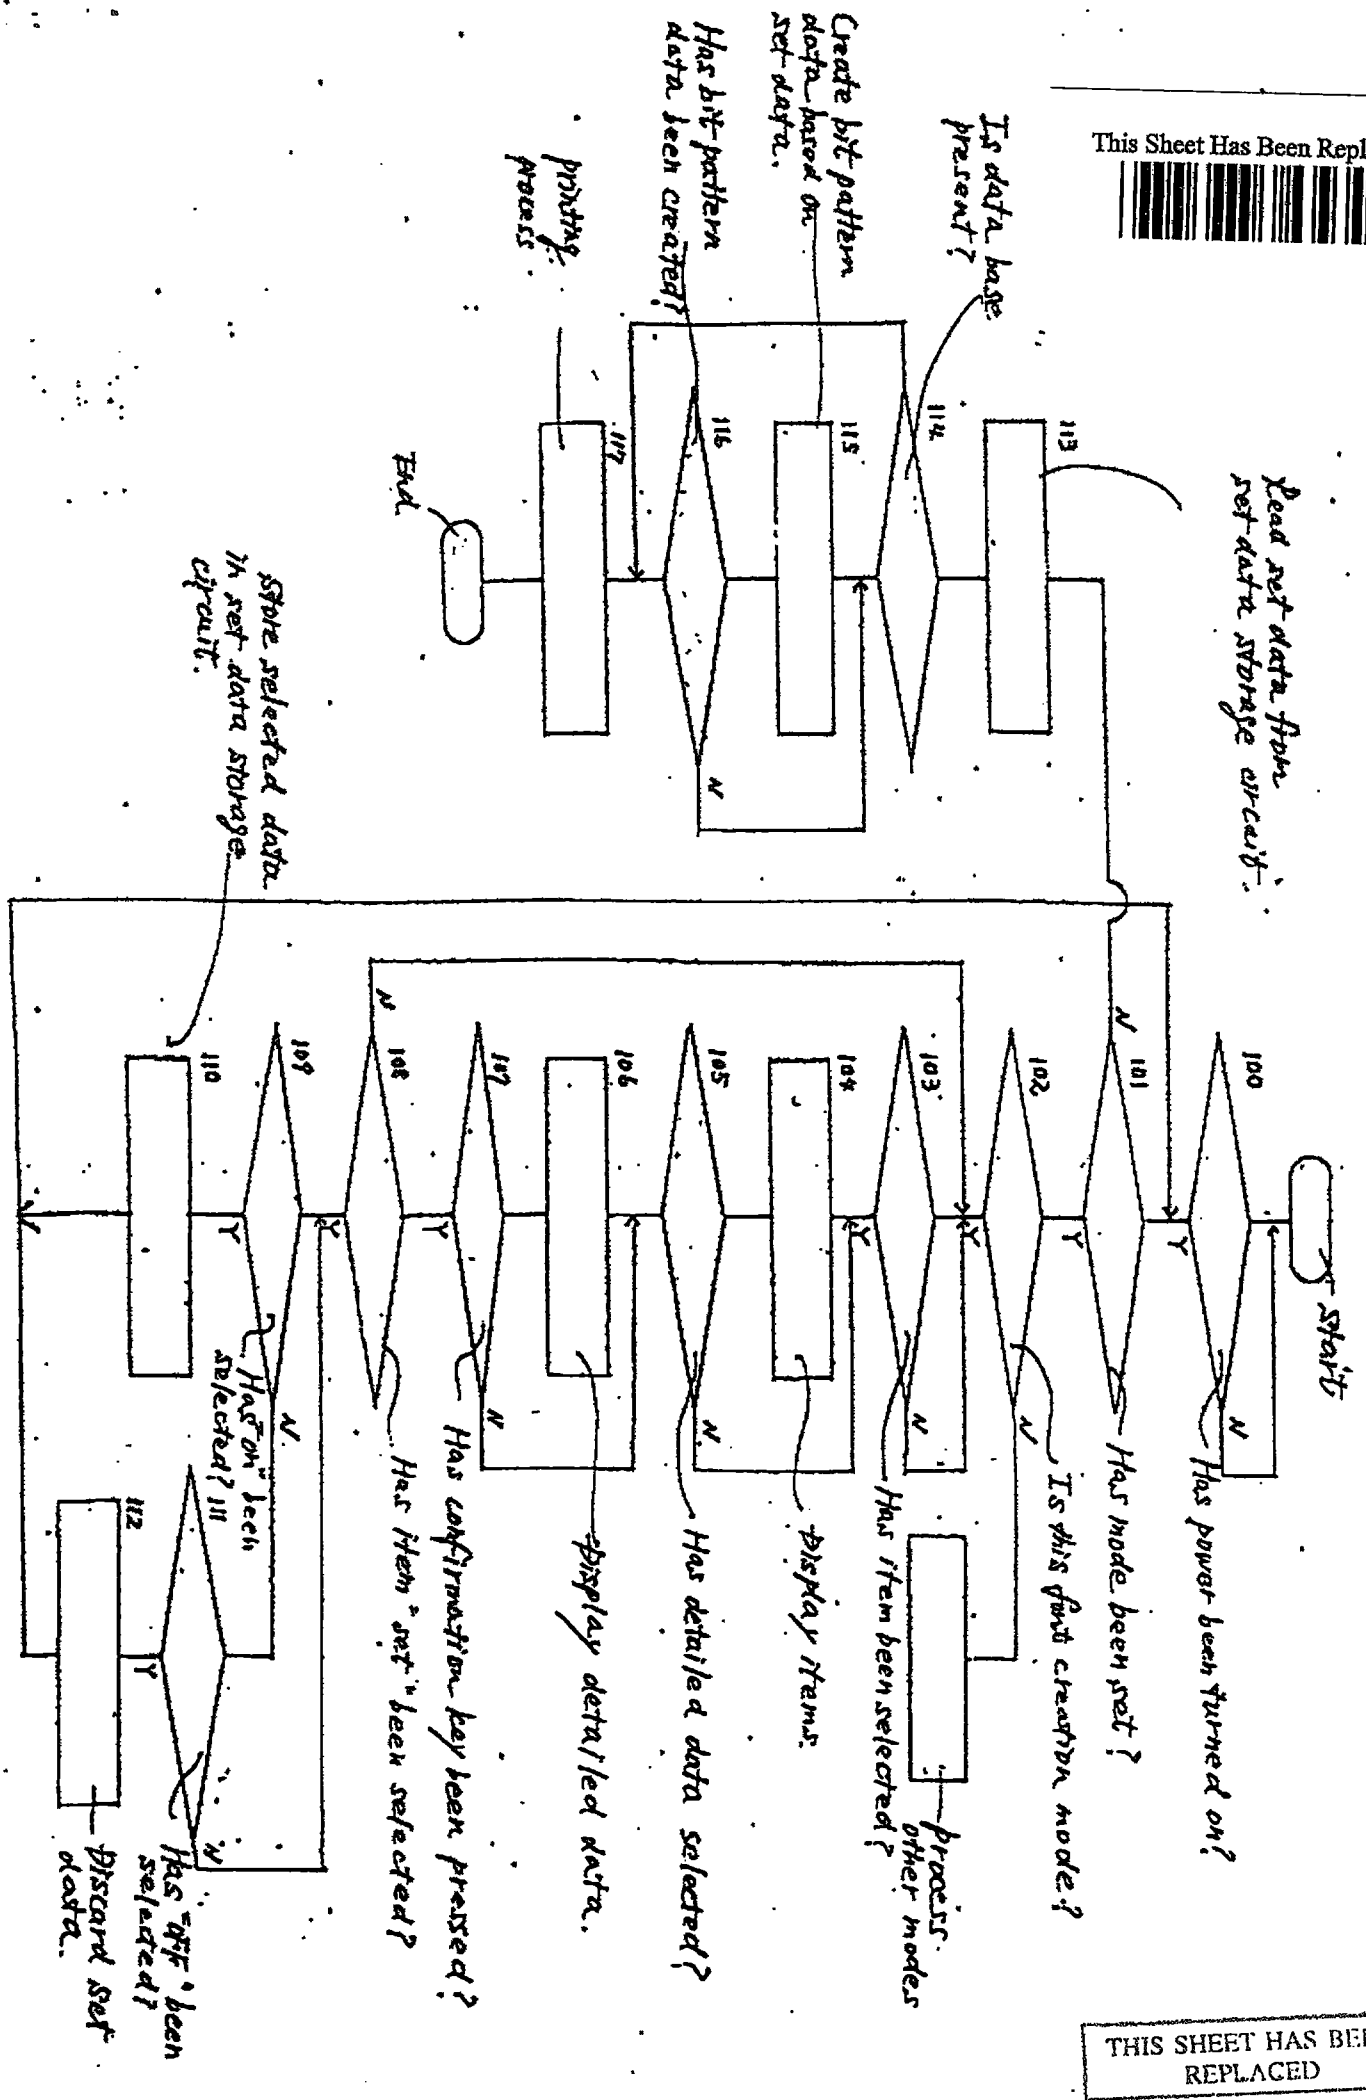


FIG. 6

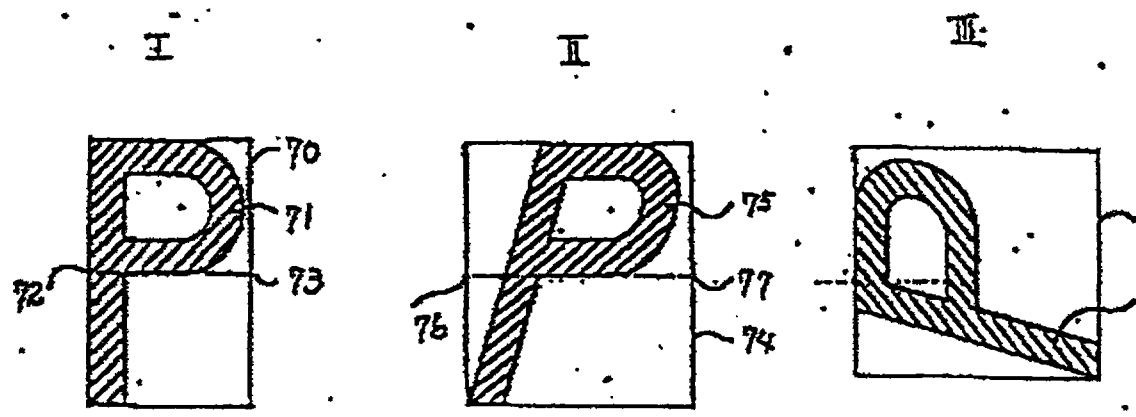

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

CHARACTER PATTERN DATA GENERATING DEVICE

Description

The present invention relates to a character pattern data generating device.

Improvements in printing resolution of printers have promoted many kinds of font to be developed and used, and to actually use various fonts, numerous kinds of bit pattern data must be stored. Because a means for storing these data must necessarily be of large capacity, the cost will be increased.

For example, FR-A-2 553 208 discloses the use of look-up-tables to identify the base addresses of bit map patterns of characters to be printed numerous of which are prestored in a bit pattern ROM memory. Also, EP-A0 205 767 uses a character pattern memory means which stores character pattern data. It allows to logically assign a typeface/font information in the data stream received from an external apparatus (e.g. a host computer) to a physical memory range containing the pattern data for the selected typeface/font.

To reduce the amount of data transferred through a microprocessor in such prior art systems and to reduce the time required for such transfers, EP-A0 292 896 discloses a font data processor which autonomously transforms bit patterns of characters to the desired shapes, based on font pattern access parameters and pattern drawing attribute defining parameters. Still, large memory capacities are required.

As a solution to the problem, a bit pattern data generating device has been proposed. First, this device makes a preparation by storing the pattern of a character or a graphic in the form of coordinate data of its outline, or the so-called "outline data," in a storage means; reading the outline data of a required font through a keyboard at printing or prior to displaying; generating bit pattern data based on the read outline data; and temporarily storing the generated bit pattern data in a random access memory (RAM). Thereafter, this device reads the bit pattern data stored in the RAM through an externally applied character code signal thereby to cause the character or graphic pattern to be printed with the desired font.

According to this device, the capacity of the storage

This Sheet Has Been Replaced



REPLACEMENT SHEET

09 JAN 1992

THIS SHEET HAS BEEN
REPLACED

means for storing fonts can be curtailed, thereby contributing to reducing the cost; however, the additional procedural operation for generating bit pattern data and temporarily storing the generated bit pattern data is required every time the printer or display unit is started, thereby being disadvantageous to the user in that it entails the additional, repetitive operation.

An object of the present invention is to overcome the above problem and thereby to provide an improved novel bit or character pattern data generating device. This object is solved by the character pattern data generating device of independent claim 1. Further advantageous features of this device are evident from the dependent claims. In the device of the invention required data are stored in a non-volatile memory as attribute data and a font is generated automatically based on the attribute data at the time of starting the printer thereby to dispense with the cumbersome operation of specifying the character generation. The invention provides a device for producing bit pattern data adapted to displaying and printing a character or pattern corresponding to a character code signal based on bit map data.

Further features and advantages of the invention will become evident from the following description and the drawings.

Fig. 1 is a block diagram showing a device that is an embodiment of the present invention;

Fig. 2 is a schematic representation showing an embodiment of a menu data storage circuit in the device of Fig. 1;

Fig. 3 is a schematic representation showing the structure of a circuit for storing set data;

Fig. 4 is a front view showing an embodiment of a panel screen in the device of Fig. 1;

Fig. 5 is a flow chart showing the operation when the font creating data is stored in the device of Fig. 1; and

Fig. 6 is a diagram explaining the process of generating a character in the device of Fig. 1.

Fig. 1 shows an embodiment of the present invention. Referring to the figure, reference numeral 1 design-

This Sheet Has Been Replaced



REPLACEMENT SHEET

09 JAN 1988

THIS SHEET HAS BEEN
REPLACED

nates an outline data storage unit, in which outlines of characters and graphics are stored as coordinate data; and 2, a bit pattern data storage unit, which erasably maintains bit pattern data generated by a microcomputer 3 (described later) based on the outline data; thus it is made up of a RAM.

Reference numeral 3 designates the microcomputer including a central processing unit (CPU) 4, a read only memory (ROM) 5, and a RAM 6; 7, a menu data storage circuit, which includes, as shown in Fig. 2, a mode selection area 20 for selecting a mode, e.g., "font creation" out of various modes; a mode detail area for each mode, which is subdivided into items such as "typeface" 21, "style" 22, "pitch" 23, "thickness" 24, "direction" 25, "point" 26, and "set" 27 in case of the "font creation" mode, and each item contains its own detailed data.

More specifically, the item "typeface" 21 contains data "courier" 31, "prestige" 32, "modern" 33, "gothic" 34; the item "style" 22 contains data "upright" 35, "italics" 36; the item "pitch" 23 contains pitch data 37 from 3.0 CPI to 20.0 CPI every 0.1 pitch and "proportional" 38; the item "thickness" 24 contains data "hair" 39, "light" 40, "medium" 41, "bold" 42, "demibold" 43, and "extra bold" 44; the item "direction" 25 contains data "portrait" 45 and "landscape" 46; the item "point" 26 contains data 47 indicating the size of points from 5.0 to 24 points every 0.5 point; and the item "set" 27 contains data "ON" 48 for specifying that the set data be saved in the storage circuit and data "OFF" 49 for specifying not to save the set data.

Returning to Fig. 1, reference numeral 8 designates a set data storage circuit, which is made up of an erasable nonvolatile memory and consists of areas 50 to 55 in correspondence with the items 21 to 26, a specified attribute area 56, and a base data area 57 as shown in Fig. 3. This base data area 57 is arranged so that it will contain material data for creating the font specified by the specified attribute area 56.

Reference numeral 10 designates the panel screen, which comprises, as shown in Fig. 4, an online selection key 60, a mode selection key 61, cursor movement keys 62, 63, 64, and 65 for selecting the items on


This Sheet Has Been Replaced



REPLACEMENT SHEET

09 JAN 1993

THIS SHEET HAS BEEN
REPLACED



the menu screen, a confirmation key 66, a key 67, and a display unit 68 of a liquid crystal system or the like.

The operation of the bit pattern data generating device thus constructed will be described with reference to the flow chart shown in Fig. 5.

[Registration of the font]

Upon turning the power on (Step 100) the microcomputer 3 is set to the print mode as a default. When the mode selection key 61 is pressed under this condition (Step 101), the microcomputer 3 prompts for mode setting without generating characters. When, e.g., the cursor movement keys 64 and 65 for vertical movement out of the keys 62 to 66 are pressed, the respective modes stored in the menu data storage circuit 7 will be sequentially displayed.

When the "font creation" menu is displayed by using the vertical movement keys 64 and 65 (Step 102) and the cursor movement keys 62 and 63 for horizontal movement are pressed, the "typeface" 21, which is the first item of the "font creation" mode 20, is displayed (Steps 103 and 104). As the cursor movement keys 64 and 65 for vertical movement are pressed under this condition, the detailed data "courier" 31, "prestige" 32, "modern" 33, and "gothic" 34 are displayed in the order written on the display unit 68 every time these keys are pressed (Steps 105 and 106). When the confirmation key 66 is pressed with a desired typeface, e.g., "gothic", being displayed in this way (Step 107), the microcomputer 3 temporarily stores this data in a buffer or the like (not shown) and jumps to Step 103. Upon completion of the registration of the item "typeface" 21, the cursor movement keys 64 and 65 for vertical movement are pressed. Then, the next item "style" 22 will be displayed. As the cursor movement keys 62 and 63 for horizontal movement are pressed with the "style" 22 being displayed on the screen and subsequently the cursor movement keys 64 and 65 for vertical movement are pressed, the detailed data, "upright" 35 and "italics" 36 are displayed on the display unit 66 in the order of the pressed keys. If the confirmation key 68 is pressed with "italics" 36 being displayed, the microcomputer 3 tem-

REPLACEMENT SHEET

09 JAN 1988

THIS SHEET HAS BEEN
REPLACED



porarily stores "italics" 36 in the buffer or the like.

Upon completion of the setting of one item in this way, the cursor movement keys are operated to move on to the next item and specify attributes as required on the item, and the confirmation key is pressed to confirm the specification.

In line with the specification of the attributes, base data necessary to generate the character having the specified attributes must also be specified.

When the setting of the items in the "font creation" mode has been completed up to the item "point," the item "set" 27 is called (Step 108). As its detailed data "ON" 48 is selected (Step 109), the microcomputer 3 transfers the data of the selected item from the buffer to the set data storage circuit 8, and sets the data "gothic," "italics," "10 CPI," "medium," "landscape," and "12" to the set attribute area 56, and the data "gothic," "upright," "10 CPI," "medium," "portrait," and "12" to the base data area 57, as shown in Fig. 3 (Step 110).

If the data "OFF" is selected in the item "set" (Step 111), the microcomputer 3 discards the data just specified (Step 112) and jumps to Step 101.

[Normal mode]

When the power is turned on to start the bit pattern data generating device with the data necessary to create a font stored in the set data storage circuit 8 (Step 100), the microcomputer 3 first accesses the set data storage circuit 8 to read the stored "font creation" data (Step 113) and checks whether or not the font of specified base data (Fig. 3) has been prepared (Step 114). If the font that serves as the basis for a font to be created does not exist, the operation is terminated. Conversely, if the base data does exist, the operation of creating a new font is executed based on the specified base data (Step 115). In parallel with this operation, the operation of warming up a printing mechanism (not shown) will be performed.

The above-described process of generating a character will now be described taking the character "P" shown in Fig. 6 as an example. The microcomputer 3

REPLACEMENT SHEET

09 JAN 1992

THIS SHEET HAS BEEN
REPLACED



reserves an area 70 for storing one character in the work area to create an italicized character and reads the standard font data "P" from the outline data storage unit 1. The font data "P" is then converted to bit pattern data 71 to create the base data bit pattern (part I of Fig.6). The bit pattern data 71 is provided with a reference point 72 referencing a predetermined printing area and a base line 73. Upon creation of the base data bit pattern in this way, a work area 74 for a next character will be reserved thereby to create bit pattern data 75 for the italicized character based on the base data bit pattern (part I). The bit pattern data 75 thus created is likewise provided with a reference point 76 referencing a predetermined printing area and a base line 77. According to the data 75, the character "P" will be created so that the portion over the base line 77 is shifted to the right from the reference point and the portion below the base line is shifted to the left (part II).

The landscape character of the character "P" will be generated by creating data in which the bit pattern data 75 is 90° rotated (part III).

In this way, when the bit pattern data of all the characters are stored in the bit pattern data storage circuit 2 (Step 116), printing is ready (Step 117). Thus, character fonts can be prepared automatically without being specified by the user.

[Change of the character fonts]

To alter the font that has already been specified at the start, e.g., "italics" in the item "style" to "upright," first, the "font creation" mode is selected by pressing the mode selection key 61 on the panel screen 10 as described previously. Then, calling the items 21 to 26 by operating the cursor movement keys 62 and 63 for horizontal movement to display the item to be altered, e.g., "style" 22 on the display unit 66. Under this condition, the cursor movement keys 62 and 63 for horizontal movement are pressed again to select and display the target data "upright" 35 on the display unit 66.

Upon completion of all necessary alternations, "set" 27 is selected by operating the cursor movement keys 64 and 65 for vertical movement, and its detailed data

REPLACEMENT SHEET

09 JAN 1988

THIS SHEET HAS BEEN
REPLACED



of "ON" 48 is selected by the cursor movement keys for horizontal movement.

As a result, the microcomputer 3 updates the data resident in the set data storage circuit 8 by the altered data and exits from the setting mode.

Although the menu items are displayed sequentially on a single item basis to minimize the size of the display unit in this embodiment, in the case where a large display unit is used, it goes without saying that a plurality of menu items may be displayed at once on the display unit and that the item selection is made by the numeric keys or cursor movement keys.

Claims

1. A character pattern data generating device, comprising: outline data storage means (1) for storing outline data of fonts;



character data storage means (2) for storing a set of bit patterns (79) for characters of a required font;

means (3,7,10) for externally specifying attribute data (56) of said required font and for externally specifying base attribute data (57) corresponding to a font stored in said outline data storage means that is required to generate said set of bit patterns (79) for characters specified by said attribute data (56);

specified data storage means (8) for storing said specified attribute data (56) and said base attribute data (57); and

means (3) for, at turning on of an electric power source, reading said specified attribute data (56) and base attribute data (57) from said specified data storage means;

for applying said specified attribute data (56) and base attribute data (57) read from said

REPLACEMENT SHEET

0 9 JAN '88

THIS SHEET HAS BEEN
REPLACED



specified data storage means (8) to outline data of a font stored in said outline data storage means (1) to generate said set of bit patterns (79) for characters of said required font;

and for storing said generated set of bit patterns for characters of said required font in said character data storage means (2).

2. A character pattern data generating device as claimed in claim 1, further comprising means (10) for displaying said specified attribute data (56) and said base attribute data (57) in a menu form.
3. A character pattern data generating device as claimed in claim 2, said means (10) for displaying further comprising cursor movement keys (62,63,64,65) for selecting said specified attribute data and said base attribute data.

This Sheet Has Been Replaced


A small 1D barcode located below the text 'This Sheet Has Been Replaced'.

REPLACEMENT SHEET


02 JAN 1998

THIS SHEET HAS BEEN
REPLACED

FIG. 1

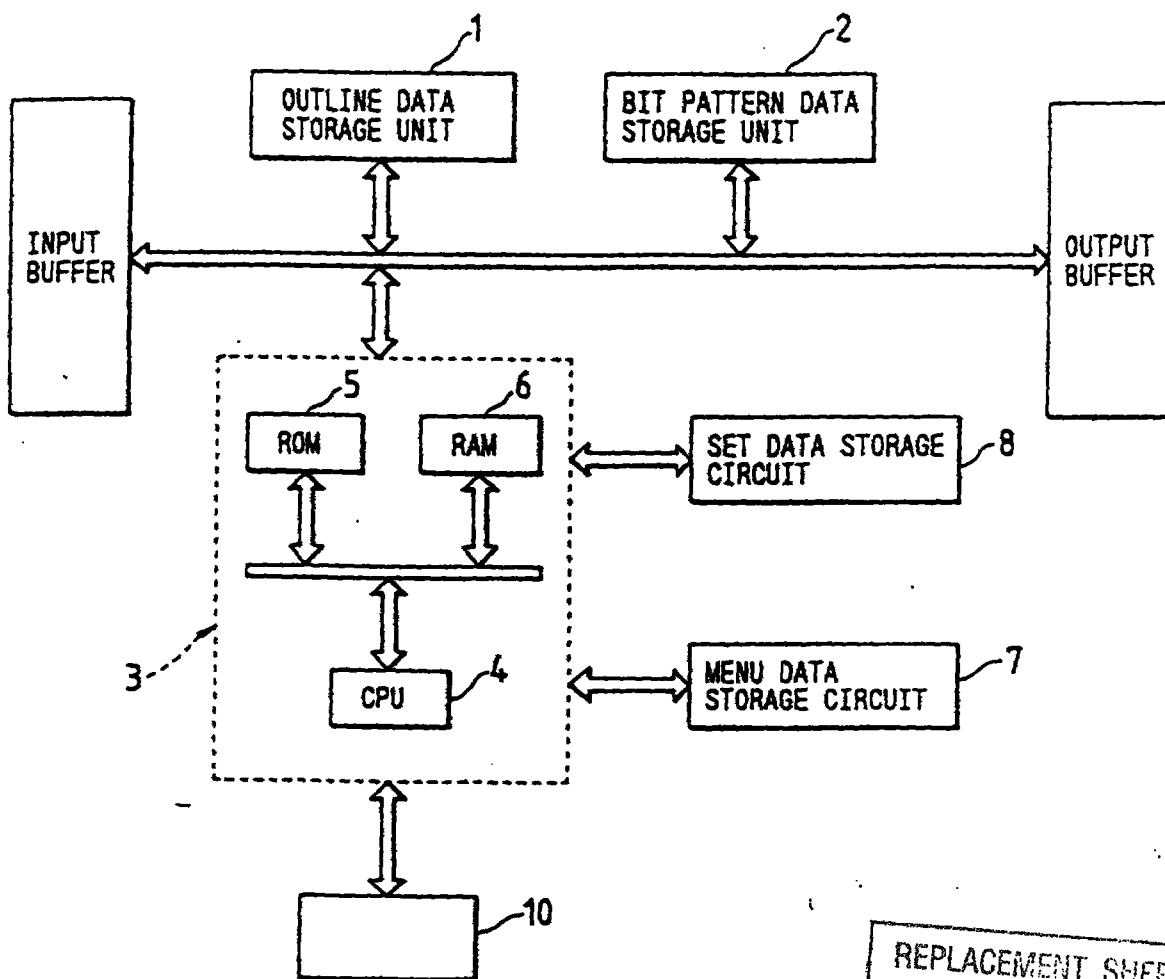

This Sheet Has Been Replaced

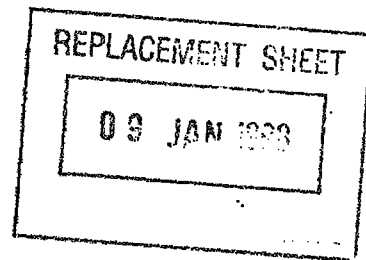

THIS SHEET HAS BEEN REPLACED



FIG. 2

20

S1	S2	S3
[1] FONT CREATION	[1] TYPEFACE	[1] COURIER 31
		[2] PRESTIGE 32
		[3] MODERN 33
		[4] GOTHIC 34
[2] STYLE	[2] STYLE	[1] UPRIGHT 35
		[2] ITALICS 36
[3] PITCH	[3] PITCH	[1] 3.0cpi (0.1 PITCH) 37
		[171] 20.0cpi
		PROPORTIONAL 38
[4] THICKNESS	[4] THICKNESS	[1] HAIR 39
		[2] LIGHT 40
		[3] MEDIUM 41
		[4] BOLD 42
		[5] DEMI BOLD 43
		[6] EXTRA BOLD 44
[5] DIRECTION	[5] DIRECTION	[1] PORTRAIT 45
		[2] LANDSCAPE 46
[6] POINT	[6] POINT	[1] 5.0 (0.5 PITCH) 47
		[39] 24.0
[7] SET	[7] SET	[1] ON 48
		[2] OFF 49
MODE 2		
MODE 3		

REPLACEMENT SHEET

08 JAN 1988


THIS SHEET HAS BEEN
REPLACED



FIG. 3

	SPECIFIED ATTRIBUTE	BASE DATA
50	TYPEFACE	GOTHIC
51	STYLE	UPRIGHT
52	PITCH	10cpi
53	THICKNESS	MEDIUM
54	DIRECTION	PORTRAIT
55	POINT	12

FIG. 4

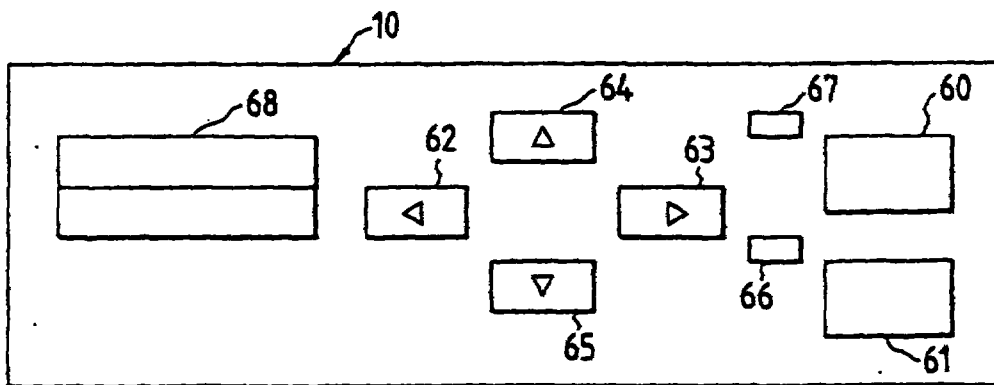

REPLACEMENT SHEET

09 JAN 1998

FIG. 6



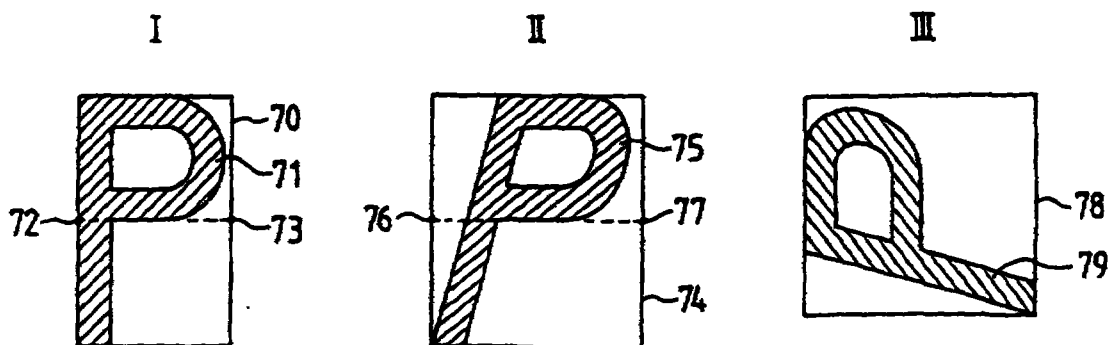
THIS SHEET HAS BEEN
REPLACED

FIG. 5

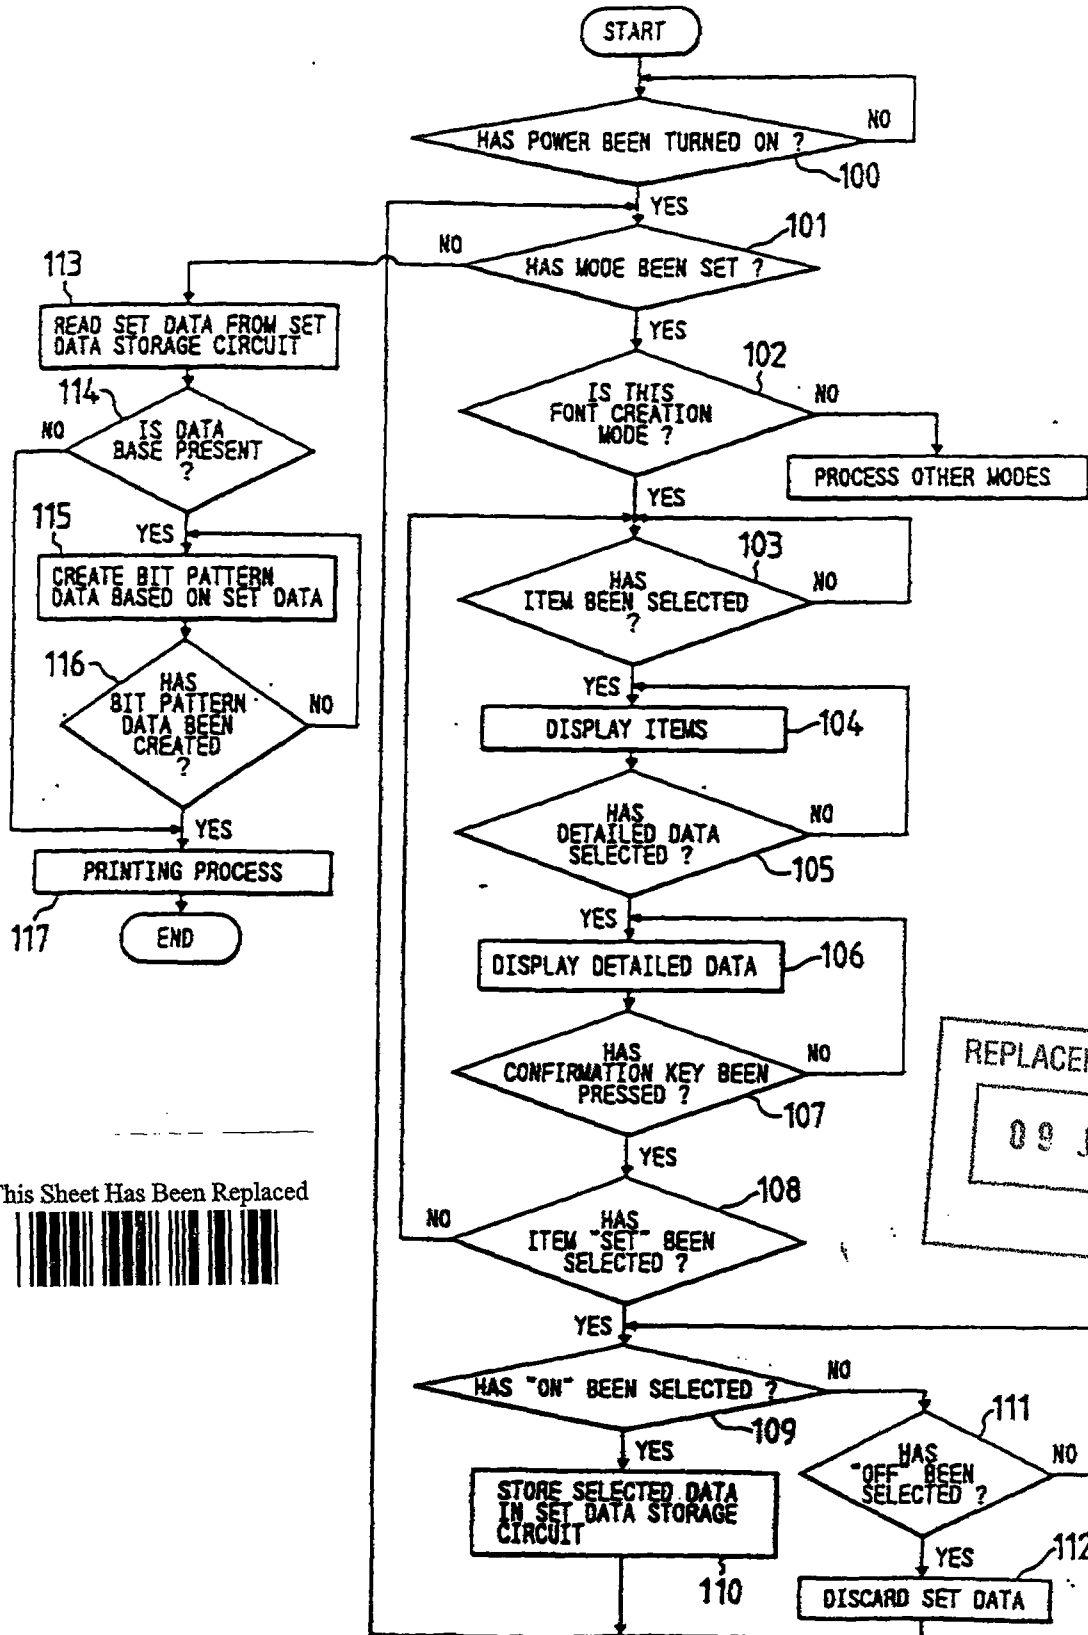

This Sheet Has Been Replaced

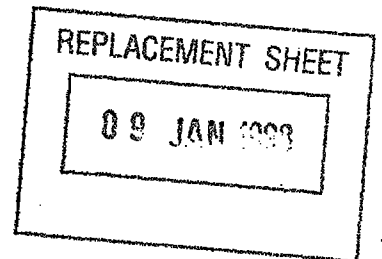

THIS SHEET HAS BEEN REPLACED

- 7 -

REPLACEMENT SHEET

of "ON" 48 is selected by the cursor movement keys for horizontal movement.

As a result, the microcomputer 3 updates the data resident in the set data storage circuit 8 by the altered data and exits from the setting mode.

Although the menu items are displayed sequentially on a single item basis to minimize the size of the display unit in this embodiment, in the case where a large display unit is used, it goes without saying that a plurality of menu items may be displayed at once on the display unit and that the item selection is made by the numeric keys or cursor movement keys.

This Sheet Has Been Replaced



REPLACEMENT SHEET

08 MAY 1999

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

Claims



1. A character pattern data generating device, comprising: outline data storage means (1) for storing outline data of fonts;

character data storage means (2) for storing a set of bit patterns (79) for characters of a required font;

means (3,7,10) for externally specifying attribute data (56) of said required font and for externally specifying base attribute data (57) corresponding to a font stored in said outline data storage means that is required to generate said set of bit patterns (79) for characters specified by said attribute data (56);

specified data storage means (8) for storing said specified attribute data (56) and said base attribute data (57); and

means (3) for, at turning on of an electric power source, reading said specified attribute data (56) and base attribute data (57) from said specified data storage means;

for applying said specified attribute data (56) and base attribute data (57) read from said specified data storage means (8) to outline data of a font stored in said outline data storage means (1) to generate said set of bit patterns (79) for characters of said required font;

and for storing said generated set of bit patterns for characters of said required font in said character data storage means (2).

2. A character pattern data generating device as claimed in claim 1, further comprising means (10) for displaying said specified attribute data (56) and said base attribute data (57) in a menu form.

This Sheet Has Been Replaced



REPLACEMENT SHEET

08 MAY 1999

THIS SHEET HAS BEEN
REPLACED




- 9 -

REPLACEMENT SHEET

3. A character pattern data generating device as claimed in claim 2, said means (10) for displaying further comprising cursor movement keys (62,63,64,65) for selecting said specified attribute data and said base attribute data.

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

08 MAY 1998

ABSTRACT

CHARACTER PATTERN DATA GENERATING DEVICE

REPLACEMENT SHEET

A device in which bit pattern data for generating bit patterns required for creating various fonts are prepared. The device stores data for specifying the font of a character which is to be prepared for printing in a nonvolatile memory and automatically generates the font by reading the data from the nonvolatile memory at the start of a printer.

Figure. 1

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

08 MAY 1998

- 11 -


ABSTRACT

REPLACEMENT SHEET

CHARACTER PATTERN DATA GENERATING DEVICE

A device in which bit pattern data for generating bit patterns required for creating various fonts are prepared. The device stores data for specifying the font of a character which is to be prepared for printing in a nonvolatile memory and automatically generates the font by reading the data from the nonvolatile memory at the start of a printer.

Figure 1




This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

FIG. 1

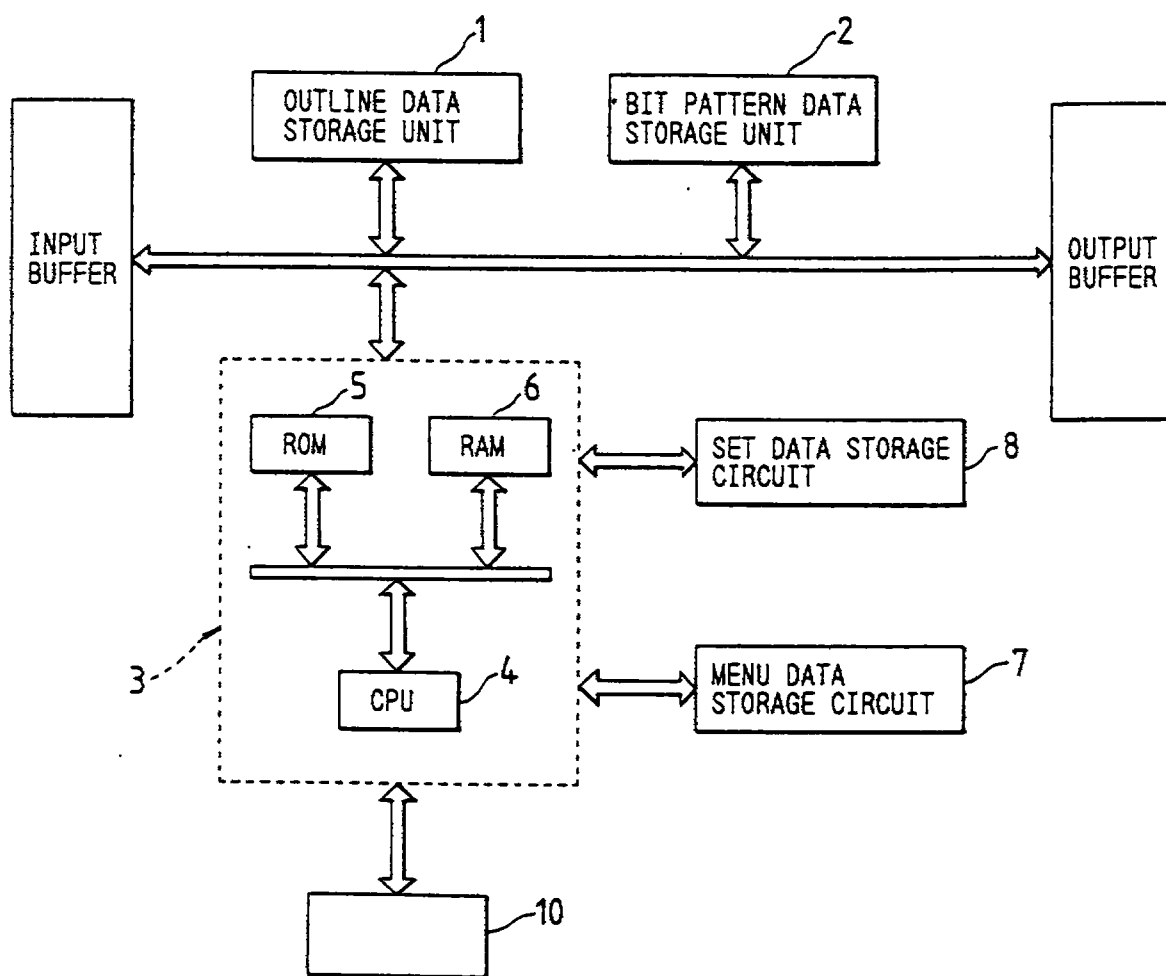

This Sheet Has Been Replaced



REPLACEMENT SHEET

05 MAR 1999

THIS SHEET HAS BEEN
REPLACED



FIG. 2

20

S1	S2	S3	
21	[1] FONT CREATION	[1] TYPEFACE	[1] COURIER 31
			[2] PRESTIGE 32
			[3] MODERN 33
			[4] GOTHIC 34
	[2] STYLE	[1] UPRIGHT 35	
		[2] ITALICS 36	
	[3] PITCH	[1] 3.0cpi (0.1 PITCH) 37	
		[171] 20.0cpi	
		PROPORTIONAL 38	
		[1] HAIR 39	
	[4] THICKNESS	[2] LIGHT 40	
		[3] MEDIUM 41	
		[4] BOLD 42	
		[5] DEMI BOLD 43	
		[6] EXTRA BOLD 44	
		[1] PORTRAIT 45	
	[5] DIRECTION	[2] LANDSCAPE 46	
		[1] 5.0 (0.5 PITCH) 47	
	[6] POINT	[39] 24.0	
		[1] ON 48	
	[7] SET	[2] OFF 49	
	MODE 2		
	MODE 3		

REPLACEMENT SHEET

05 MAR 1999


THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

FIG. 3

	56		57
	SPECIFIED ATTRIBUTE		BASE DATA
50	TYPEFACE	GOTHIC	GOTHIC
51	STYLE	ITALICS	UPRIGHT
52	PITCH	10cpi	10cpi
53	THICKNESS	MEDIUM	MEDIUM
54	DIRECTION	LANDSCAPE	PORTRAIT
55	POINT	12	12

FIG. 4

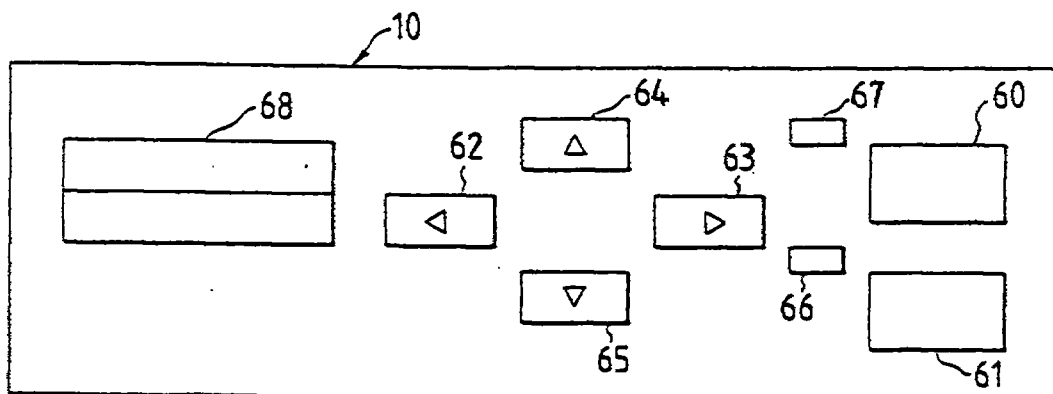

This Sheet Has Been Replaced




THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 MAR 1999

FIG. 5 REPLACEMENT SHEET

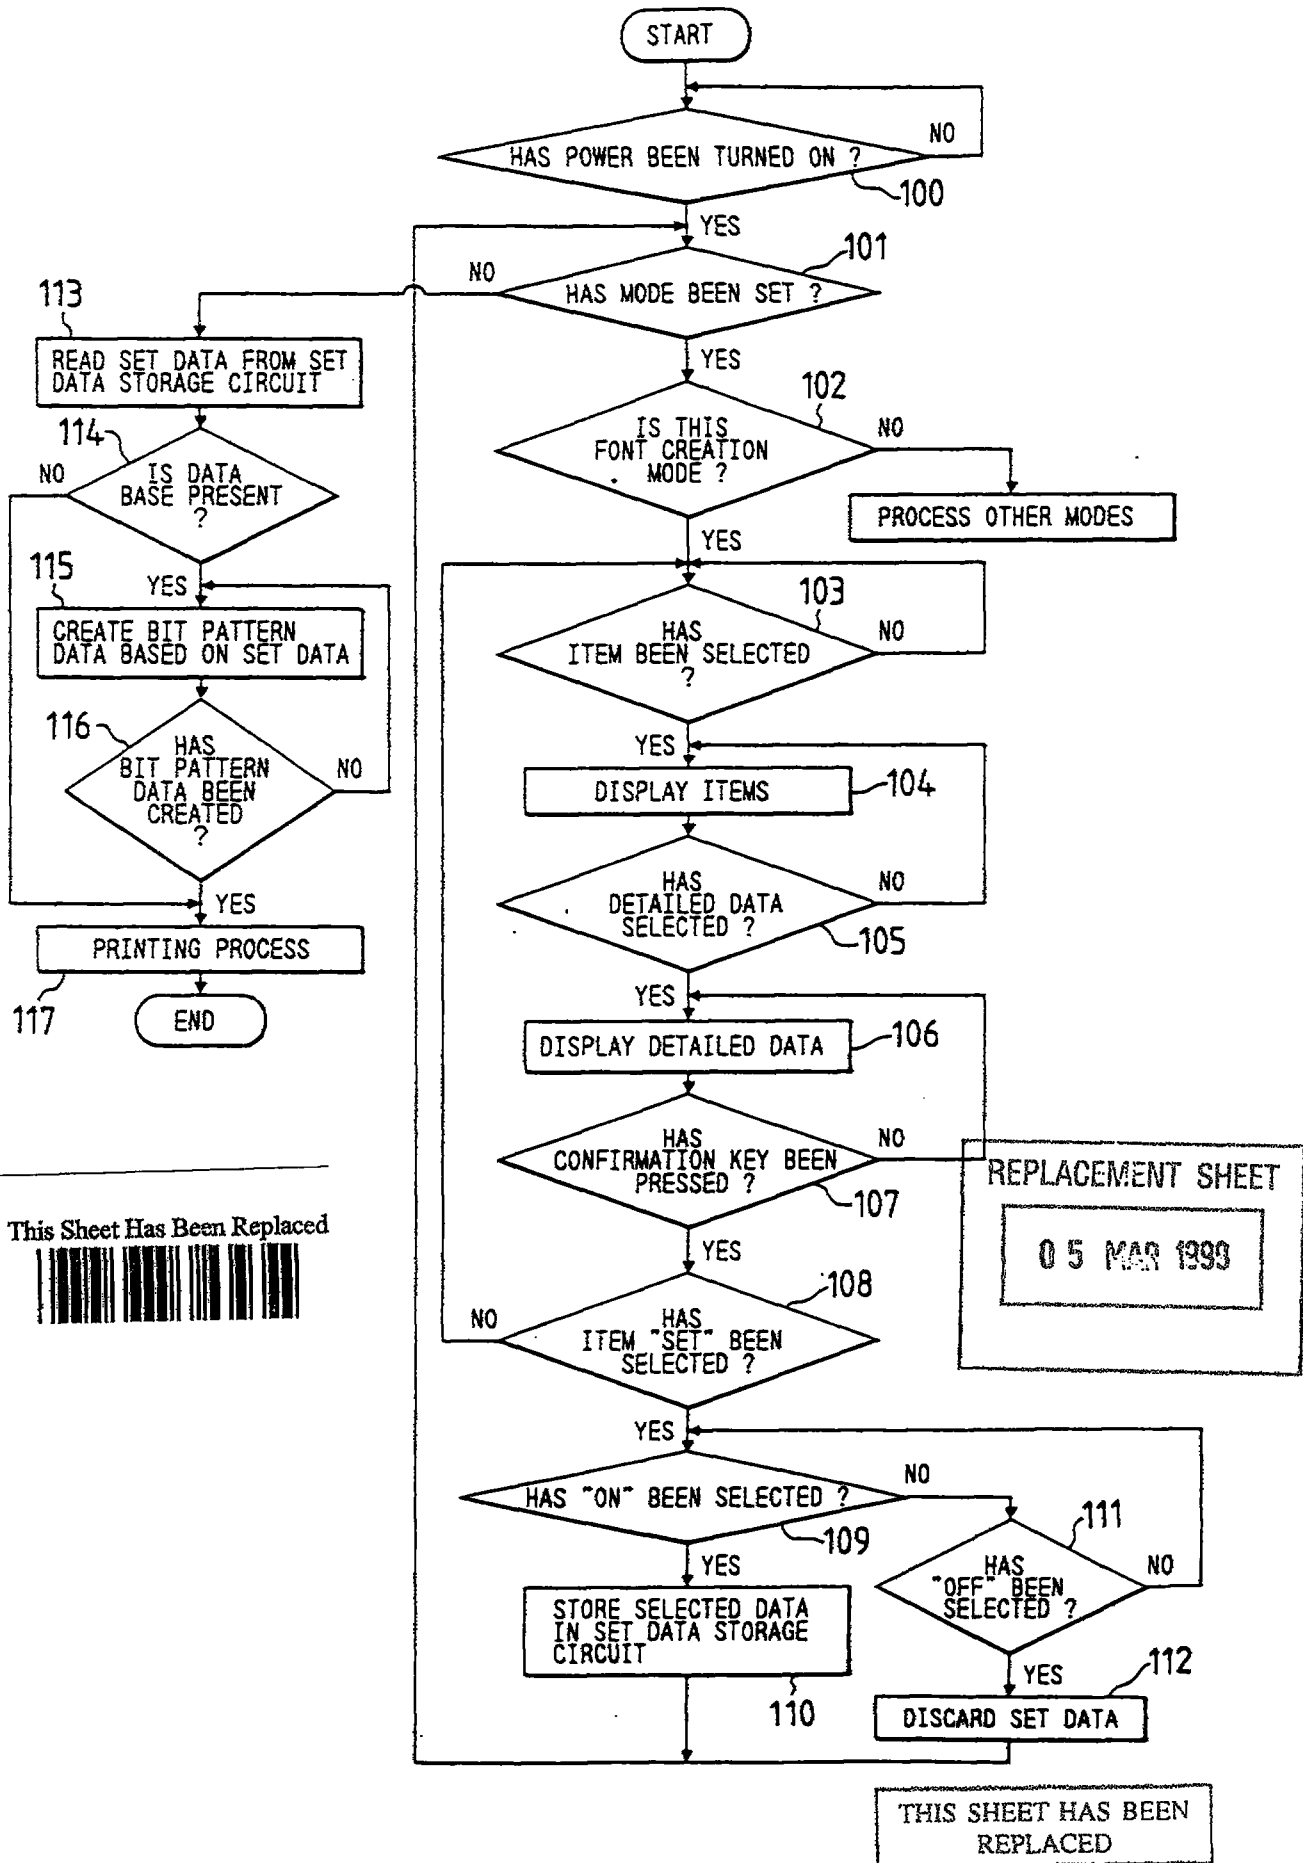

This Sheet Has Been Replaced




REPLACEMENT SHEET


05 MAR 1993

THIS SHEET HAS BEEN REPLACED

FIG. 6

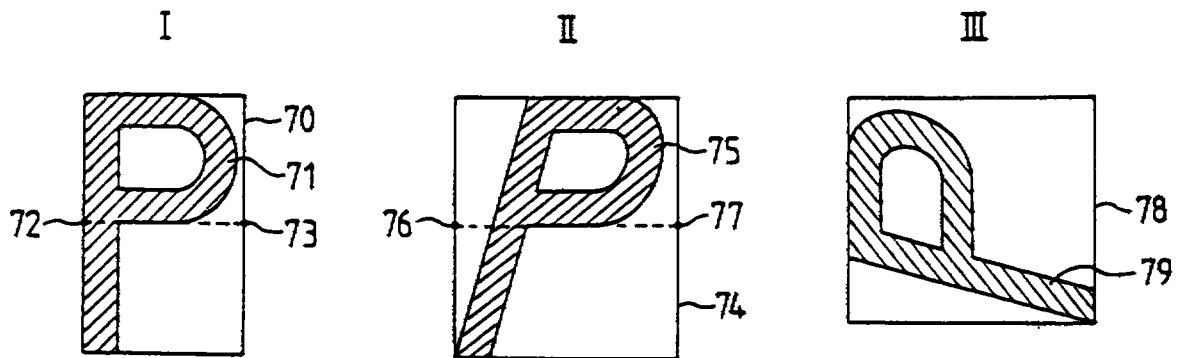

This Sheet Has Been Replaced



REPLACEMENT SHEET

05 MAR 1999

THIS SHEET HAS BEEN
REPLACED

means for storing fonts can be curtailed, thereby contributing to reducing the cost; however, the additional procedural operation for generating bit pattern data and temporarily storing the generated bit pattern data is required every time the printer or display unit is started, thereby being disadvantageous to the user in that it entails the additional, repetitive operation.

An object of the present invention is to overcome the above problem and thereby to provide an improved novel bit or character pattern data generating device. This object is solved by the character pattern data generating device of independent claim 1. Further advantageous features of this device are evident from the dependent claims. In the device of the invention required fonts are stored in a non-volatile memory as attribute data and a font is generated automatically based on the attribute data at the time of starting the printer thereby to dispense with the cumbersome operation of specifying the character generation. The invention provides a device for producing bit pattern data adapted to displaying and printing a character or pattern corresponding to a character code signal based on bit map data.

Further features and advantages of the invention will become evident from the following description and the drawings.

- Fig. 1 is a block diagram showing a device that is an embodiment of the present invention;
- Fig. 2 is a schematic representation showing an embodiment of a menu data storage circuit in the device of Fig. 1;
- Fig. 3 is a schematic representation showing the structure of a circuit for storing set data;
- Fig. 4 is a front view showing an embodiment of a panel screen in the device of Fig. 1;
- Fig. 5 is a flow chart showing the operation when the font creating data is stored in the device of Fig. 1; and
- Fig. 6 is a diagram explaining the process of generating a character in the device of Fig. 1.

This Sheet Has Been Replaced

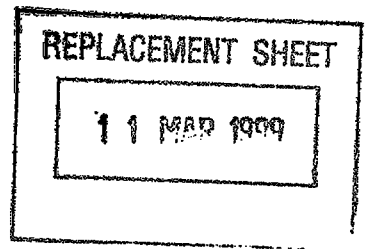



Fig. 1 shows an embodiment of the present invention. Referring to the figure, reference numeral 1 designates

THIS SHEET HAS BEEN REPLACED

FIG. 3

	SPECIFIED ATTRIBUTE	BASE DATA
50	TYPEFACE	GOTHIC
51	STYLE	ITALICS
52	PITCH	10cpi
53	THICKNESS	MEDIUM
54	DIRECTION	LANDSCAPE
55	POINT	12

FIG. 4

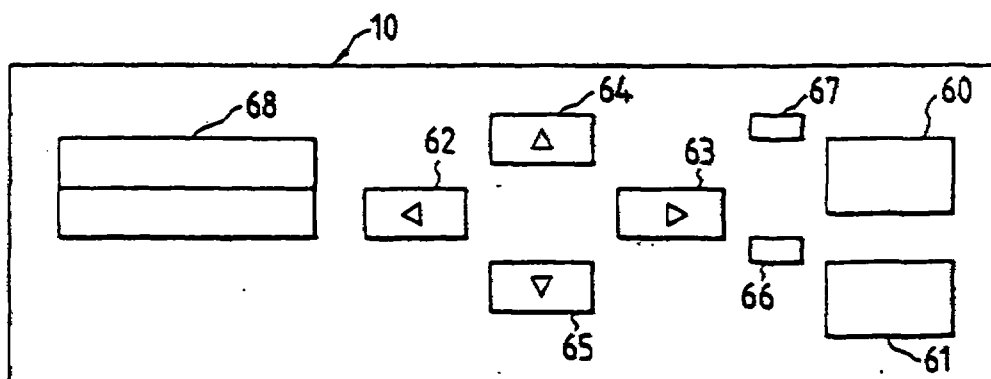


This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1999

FIG. 5

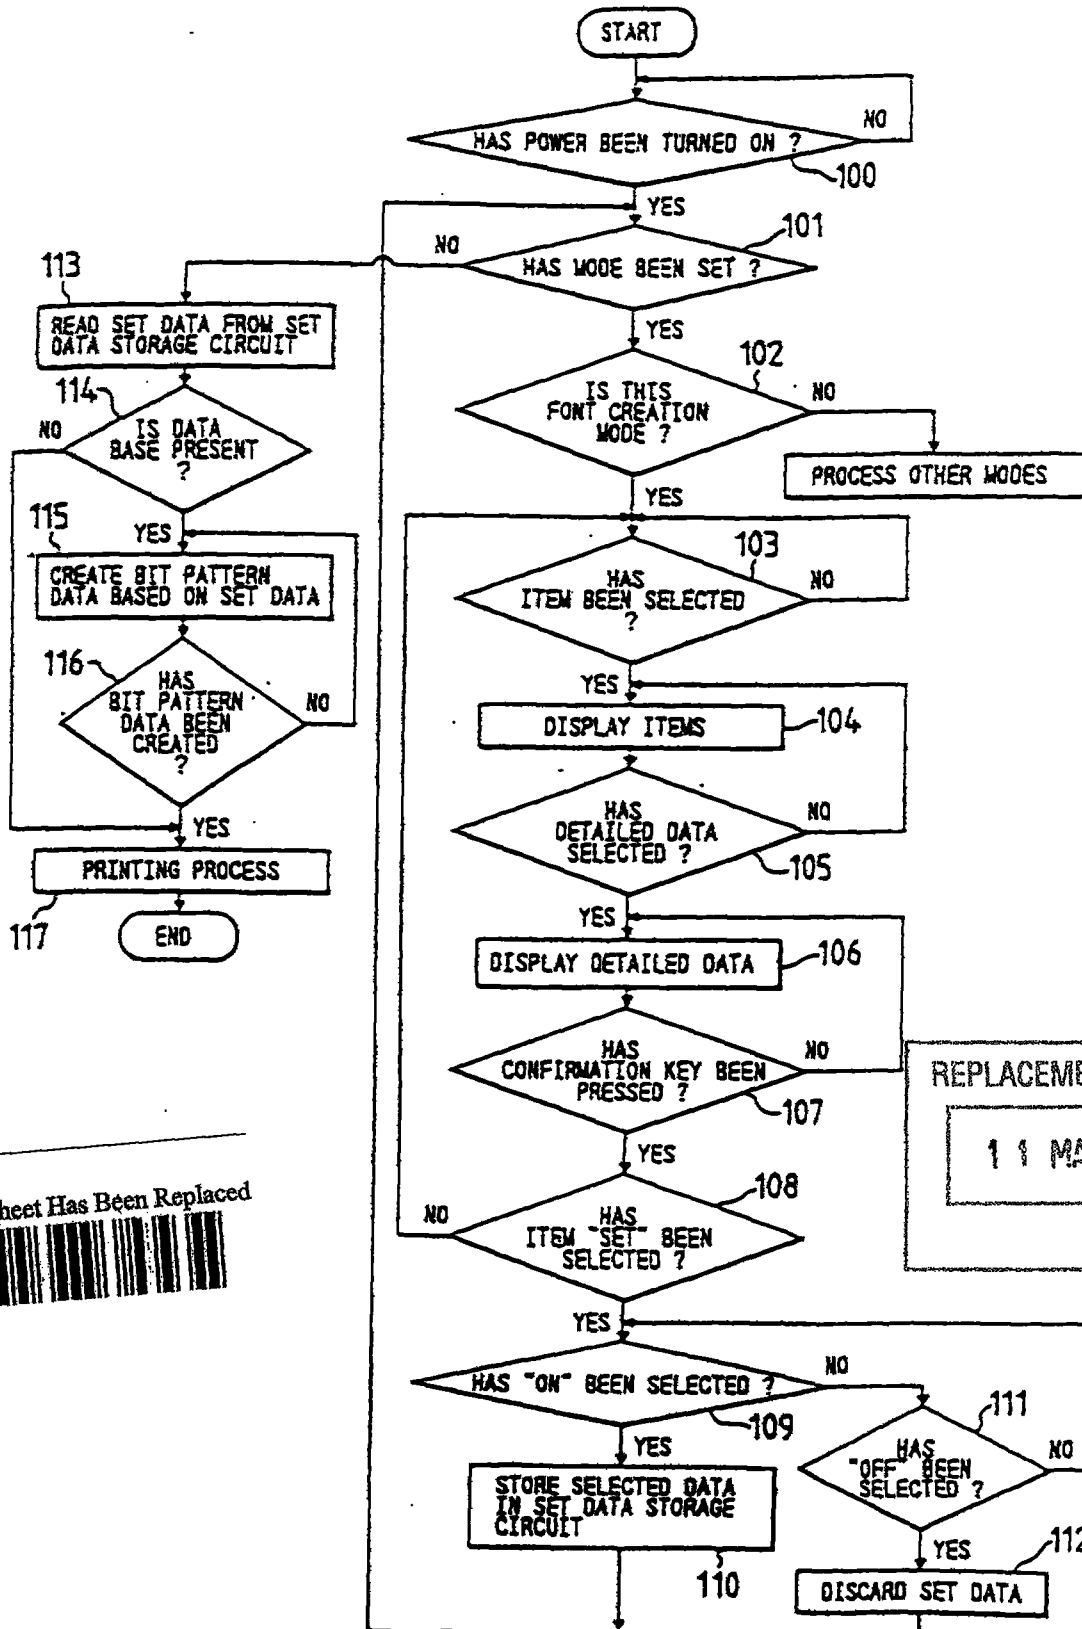

This Sheet Has Been Replaced




REPLACEMENT SHEET

11 MAR 1999

THIS SHEET HAS BEEN REPLACED

FIG. 6

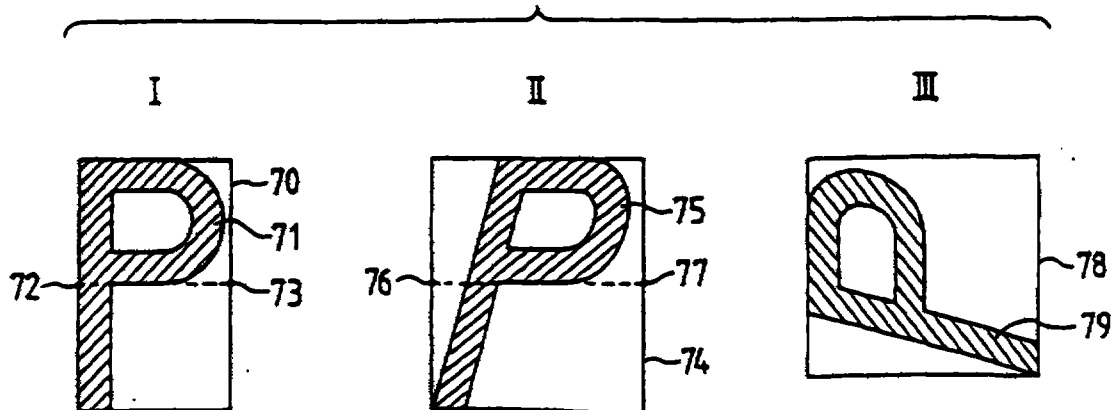

This Sheet Has Been Replaced



THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

11 MAR 1999

- 1 -

CHARACTER PATTERN DATA GENERATING DEVICE**Description**

The present invention relates to a character pattern data generating device.


Improvements in printing resolution of printers have promoted many kinds of font to be developed and used, and to actually use various fonts, numerous kinds of bit pattern data must be stored. Because a means for storing these data must necessarily be of large capacity, the cost will be increased.

For example, FR-A-2 553 208 discloses the use of look-up-tables to identify the base addresses of bit map patterns of characters to be printed numerous of which are prestored in a bit pattern ROM memory. Also, EP-A0 205 767 uses a character pattern memory means which stores character pattern data. It allows to logically assign a typeface/font information in the data stream received from an external apparatus (e.g. a host computer) to a physical memory range containing the pattern data for the selected typeface/font.

To reduce the amount of data transferred through a microprocessor in such prior art systems and to reduce the time required for such transfers, EP-A0 292 896 discloses a font data processor which autonomously transforms bit patterns of characters to the desired shapes, based on font pattern access parameters and pattern drawing attribute defining parameters. Still, large memory capacities are required.

As a solution to the problem, a bit pattern data generating device has been proposed. First, this device makes a preparation by storing the pattern of a character or a graphic in the form of coordinate data of its outline, or the so-called "outline data," in a storage means; reading the outline data of a required font through a keyboard at printing or prior to displaying; generating bit pattern data based on the read outline data; and temporarily storing the generated bit pattern data in a random access memory (RAM). Thereafter, this device reads the bit pattern data stored in the RAM through an externally applied character code signal thereby to cause the character or graphic pattern to be printed with the desired font.

According to this device, the capacity of the storage

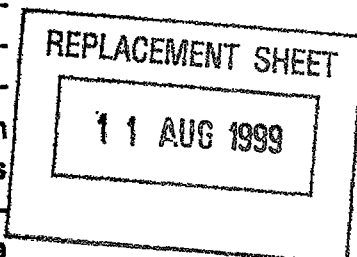

means for storing fonts can be curtailed, thereby contributing to reducing the cost; however, the additional procedural operation for generating bit pattern data and temporarily storing the generated bit pattern data is required every time the printer or display unit is started, thereby being disadvantageous to the user in that it entails the additional, repetitive operation.

An object of the present invention is to overcome the above problem and thereby to provide an improved novel bit or character pattern data generating device. This object is solved by the character pattern data generating device of independent claim 1. Further advantageous features of this device are evident from the dependent claims. In the device of the invention required fonts are stored in a non-volatile memory as attribute data and a font is generated automatically based on the attribute data at the time of starting the printer thereby to dispense with the cumbersome operation of specifying the character generation. The invention provides a device for producing bit pattern data adapted to displaying and printing a character or pattern corresponding to a character code signal based on bit map data.

Further features and advantages of the invention will become evident from the following description and the drawings.

Fig. 1 is a block diagram showing a device that is an embodiment of the present invention;

Fig. 2 is a schematic representation showing an embodiment of a menu data storage circuit in the device of Fig. 1;

Fig. 3 is a schematic representation showing the structure of a circuit for storing set data;

Fig. 4 is a front view showing an embodiment of a panel screen in the device of Fig. 1;

Fig. 5 is a flow chart showing the operation when the font creating data is stored in the device of Fig. 1; and

Fig. 6 is a diagram explaining the process of generating a character in the device of Fig. 1.

Fig. 1 shows an embodiment of the present invention. Referring to the figure, reference numeral 1 design-

REPLACEMENT SHEET

11 AUG 1999

nates an outline data storage unit, in which outlines of characters and graphics are stored as coordinate data; and 2, a bit pattern data storage unit, which erasably maintains bit pattern data generated by a microcomputer 3 (described later) based on the outline data; thus it is made up of a RAM.

Reference numeral 3 designates the microcomputer including a central processing unit (CPU) 4, a read only memory (ROM) 5, and a RAM 6; 7, a menu data storage circuit, which includes, as shown in Fig. 2, a mode selection area 20 for selecting a mode, e.g., "font creation" out of various modes; a mode detail area for each mode, which is subdivided into items such as "typeface" 21, "style" 22, "pitch" 23, "thickness" 24, "direction" 25, "point" 26, and "set" 27 in case of the "font creation" mode, and each item contains its own detailed data.

More specifically, the item "typeface" 21 contains data "courier" 31, "prestige" 32, "modern" 33, "gothic" 34; the item "style" 22 contains data "upright" 35, "italics" 36; the item "pitch" 23 contains pitch data 37 from 3.0 CPI to 20.0 CPI every 0.1 pitch and "proportional" 38; the item "thickness" 24 contains data "hair" 39, "light" 40, "medium" 41, "bold" 42, "demibold" 43, and "extra bold" 44; the item "direction" 25 contains data "portrait" 45 and "landscape" 46; the item "point" 26 contains data 47 indicating the size of points from 5.0 to 24 points every 0.5 point; and the item "set" 27 contains data "ON" 48 for specifying that the set data be saved in the storage circuit and data "OFF" 49 for specifying not to save the set data.

Returning to Fig. 1, reference numeral 8 designates a set data storage circuit, which is made up of an erasable nonvolatile memory and consists of areas 50 to 55 in correspondence with the items 21 to 26, a specified attribute area 56, and a base data area 57 as shown in Fig. 3. This base data area 57 is arranged so that it will contain material data for creating the font specified by the specified attribute area 56.

Reference numeral 10 designates the panel screen, which comprises, as shown in Fig. 4, an online selection key 60, a mode selection key 61, cursor movement keys 62, 63, 64, and 65 for selecting the items on

REPLACEMENT SHEET

11 AUG 1999

the menu screen, a confirmation key 66, a key 67, and a display unit 68 of a liquid crystal system or the like.

The operation of the bit pattern data generating device thus constructed will be described with reference to the flow chart shown in Fig. 5.

[Registration of the font]

Upon turning the power on (Step 100) the microcomputer 3 is set to the print mode as a default. When the mode selection key 61 is pressed under this condition (Step 101), the microcomputer 3 prompts for mode setting without generating characters. When, e.g., the cursor movement keys 64 and 65 for vertical movement out of the keys 62 to 66 are pressed, the respective modes stored in the menu data storage circuit 7 will be sequentially displayed.

When the "font creation" menu is displayed by using the vertical movement keys 64 and 65 (Step 102) and the cursor movement keys 62 and 63 for horizontal movement are pressed, the "typeface" 21, which is the first item of the "font creation" mode 20, is displayed (Steps 103 and 104). As the cursor movement keys 64 and 65 for vertical movement are pressed under this condition, the detailed data "courier" 31, "prestige" 32, "modern" 33, and "gothic" 34 are displayed in the order written on the display unit 68 every time these keys are pressed (Steps 105 and 106). When the confirmation key 66 is pressed with a desired typeface, e.g., "gothic", being displayed in this way (Step 107), the microcomputer 3 temporarily stores this data in a buffer or the like (not shown) and jumps to Step 103. Upon completion of the registration of the item "typeface" 21, the cursor movement keys 64 and 65 for vertical movement are pressed. Then, the next item "style" 22 will be displayed. As the cursor movement keys 62 and 63 for horizontal movement are pressed with the "style" 22 being displayed on the screen and subsequently the cursor movement keys 64 and 65 for vertical movement are pressed, the detailed data, "upright" 35 and "italics" 36, are displayed on the display unit 66 in the order of the pressed keys. If the confirmation key 68 is pressed with "italics" 36 being displayed, the microcomputer 3 tem-

REPLACEMENT SHEET

11 AUG 1989

porarily stores "italics" 36 in the buffer or the like.

Upon completion of the setting of one item in this way, the cursor movement keys are operated to move on to the next item and specify attributes as required on the item, and the confirmation key is pressed to confirm the specification.

In line with the specification of the attributes, base data necessary to generate the character having the specified attributes must also be specified.

When the setting of the items in the "font creation" mode has been completed up to the item "point," the item "set" 27 is called (Step 108). As its detailed data "ON" 48 is selected (Step 109), the microcomputer 3 transfers the data of the selected item from the buffer to the set data storage circuit 8, and sets the data "gothic," "italics," "10 CPI," "medium," "landscape," and "12" to the set attribute area 56, and the data "gothic," "upright," "10 CPI," "medium," "portrait," and "12" to the base data area 57, as shown in Fig. 3 (Step 110).

If the data "OFF" is selected in the item "set" (Step 111), the microcomputer 3 discards the data just specified (Step 112) and jumps to Step 101.

[Normal mode]

When the power is turned on to start the bit pattern data generating device with the data necessary to create a font stored in the set data storage circuit 8 (Step 100), the microcomputer 3 first accesses the set data storage circuit 8 to read the stored "font creation" data (Step 113) and checks whether or not the font of specified base data (Fig. 3) has been prepared (Step 114). If the font that serves as the basis for a font to be created does not exist, the operation is terminated. Conversely, if the base data does exist, the operation of creating a new font is executed based on the specified base data (Step 115). In parallel with this operation, the operation of warming up a printing mechanism (not shown) will be performed.

The above-described process of generating a character will now be described taking the character "P" shown in Fig. 6 as an example. The microcomputer 3

REPLACEMENT SHEET

11 AUG 1999

reserves an area 70 for storing one character in the work area to create an italicized character and reads the standard font data "P" from the outline data storage unit 1. The font data "P" is then converted to bit pattern data 71 to create the base data bit pattern (part I of Fig.6). The bit pattern data 71 is provided with a reference point 72 referencing a predetermined printing area and a base line 73. Upon creation of the base data bit pattern in this way, a work area 74 for a next character will be reserved thereby to create bit pattern data 75 for the italicized character based on the base data bit pattern (part I). The bit pattern data 75 thus created is likewise provided with a reference point 76 referencing a predetermined printing area and a base line 77. According to the data 75, the character "P" will be created so that the portion over the base line 77 is shifted to the right from the reference point and the portion below the base line is shifted to the left (part II).

The landscape character of the character "P" will be generated by creating data in which the bit pattern data 75 is 90° rotated (part III).

In this way, when the bit pattern data of all the characters are stored in the bit pattern data storage circuit 2 (Step 116), printing is ready (Step 117). Thus, character fonts can be prepared automatically without being specified by the user.

[Change of the character fonts]

To alter the font that has already been specified at the start, e.g., "italics" in the item "style" to "upright," first, the "font creation" mode is selected by pressing the mode selection key 61 on the panel screen 10 as described previously. Then, calling the items 21 to 26 by operating the cursor movement keys 62 and 63 for horizontal movement to display the item to be altered, e.g., "style" 22 on the display unit 66. Under this condition, the cursor movement keys 62 and 63 for horizontal movement are pressed again to select and display the target data "upright" 35 on the display unit 66.

Upon completion of all necessary alternations, "set" 27 is selected by operating the cursor movement keys 64 and 65 for vertical movement, and its detailed data

REPLACEMENT SHEET

11 AUG 1999

of "ON" 48 is selected by the cursor movement keys for horizontal movement.

As a result, the microcomputer 3 updates the data resident in the set data storage circuit 8 by the altered data and exits from the setting mode.

Although the menu items are displayed sequentially on a single item basis to minimize the size of the display unit in this embodiment, in the case where a large display unit is used, it goes without saying that a plurality of menu items may be displayed at once on the display unit and that the item selection is made by the numeric keys or cursor movement keys.

REPLACEMENT SHEET

11 AUG 1980



Claims

1. A character pattern data generating device, comprising: outline data storage means (1) for storing outline data of fonts;

character data storage means (2) for storing a set of bit patterns (79) for characters of a required font;

means (3,7,10) for externally specifying attribute data (56) of said required font and for externally specifying base attribute data (57) corresponding to a font stored in said outline data storage means that is required to generate said set of bit patterns (79) for characters specified by said attribute data (56);

specified data storage means (8) for storing said specified attribute data (56) and said base attribute data (57); and

means (3) for, at turning on of an electric power source, reading said specified attribute data (56) and base attribute data (57) from said specified data storage means;

for applying said specified attribute data (56) and base attribute data (57) read from said specified data storage means (8) to outline data of a font stored in said outline data storage means (1) to generate said set of bit patterns (79) for characters of said required font;

and for storing said generated set of bit patterns for characters of said required font in said character data storage means (2).


2. A character pattern data generating device as claimed in claim 1, further comprising means (10) for displaying said specified attribute data (56) and said base attribute data (57) in a menu form.

REPLACEMENT SHEET

11 AUG 1999

REPLACEMENT SHE

3. A character pattern data generating device as claimed in claim 2, said means (10) for displaying further comprising cursor movement keys (62,63,64,65) for selecting said specified attribute data and said base attribute data.

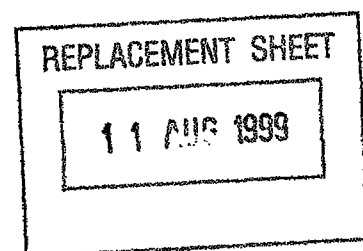

ABSTRACT

CHARACTER PATTERN DATA GENERATING DEVICE

A device in which bit pattern data for generating bit patterns required for creating various fonts are prepared. The device stores data for specifying the font of a character which is to be prepared for printing in a nonvolatile memory and automatically generates the font by reading the data from the nonvolatile memory at the start of a printer.

Figure. 1


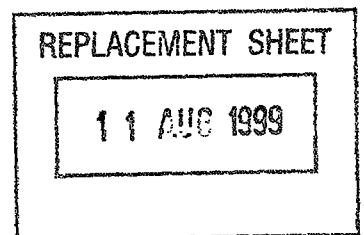


FIG. 1

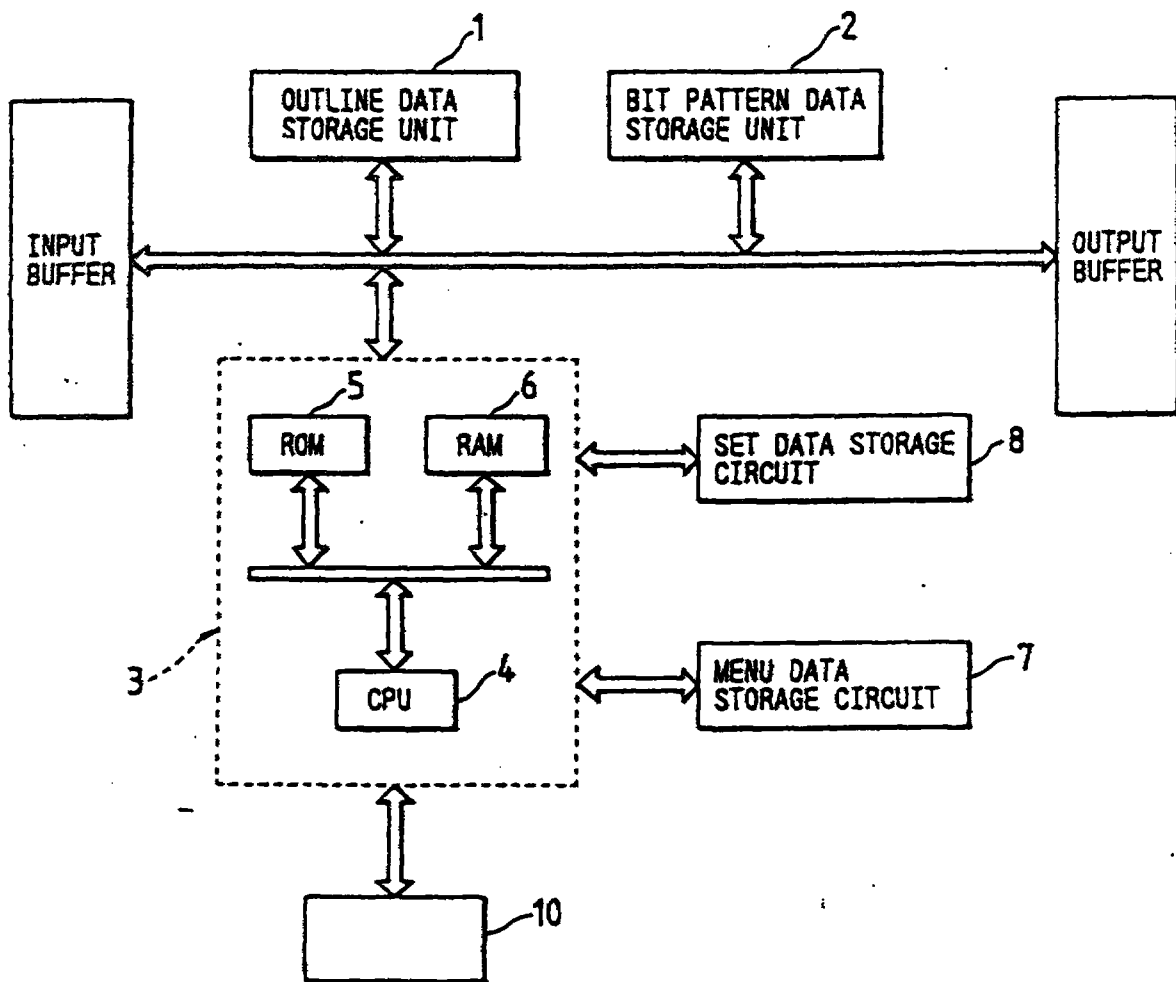

REPLACEMENT SHEET

11 AUG 1999

FIG. 2

20

S1	S2	S3
[1] FONT CREATION	[1] TYPEFACE	[1] COURIER 31
		[2] PRESTIGE 32
		[3] MODERN 33
		[4] GOTHIC 34
	[2] STYLE 22	[1] UPRIGHT 35
		[2] ITALICS 36
	[3] PITCH 23	[1] 3.0cpi (0.1 PITCH) 37
		[171] 20.0cpi
		PROPORTIONAL 38
	[4] THICKNESS 24	[1] HAIR 39
		[2] LIGHT 40
		[3] MEDIUM 41
		[4] BOLD 42
		[5] DEMI BOLD 43
		[6] EXTRA BOLD 44
	[5] DIRECTION 25	[1] PORTRAIT 45
		[2] LANDSCAPE 46
	[6] POINT 26	[1] 5.0 (0.5 PITCH) 47
		[39] 24.0
[7] SET 27	[1] ON 48	
	[2] OFF 49	
MODE 2		
MODE 3		


REPLACEMENT SHEET

11 AUG 1999

FIG. 3

	56		57
	SPECIFIED ATTRIBUTE		BASE DATA
50	TYPEFACE	GOTHIC	GOTHIC
51	STYLE	ITALICS	UPRIGHT
52	PITCH	10cpi	10cpi
53	THICKNESS	MEDIUM	MEDIUM
54	DIRECTION	LANDSCAPE	PORTRAIT
55	POINT	12	12

FIG. 4

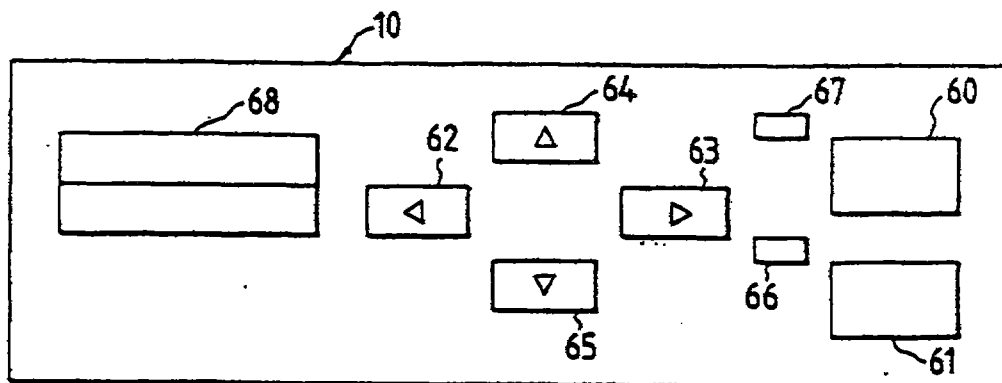

REPLACEMENT SHEET

11 AUG 1999

FIG. 5


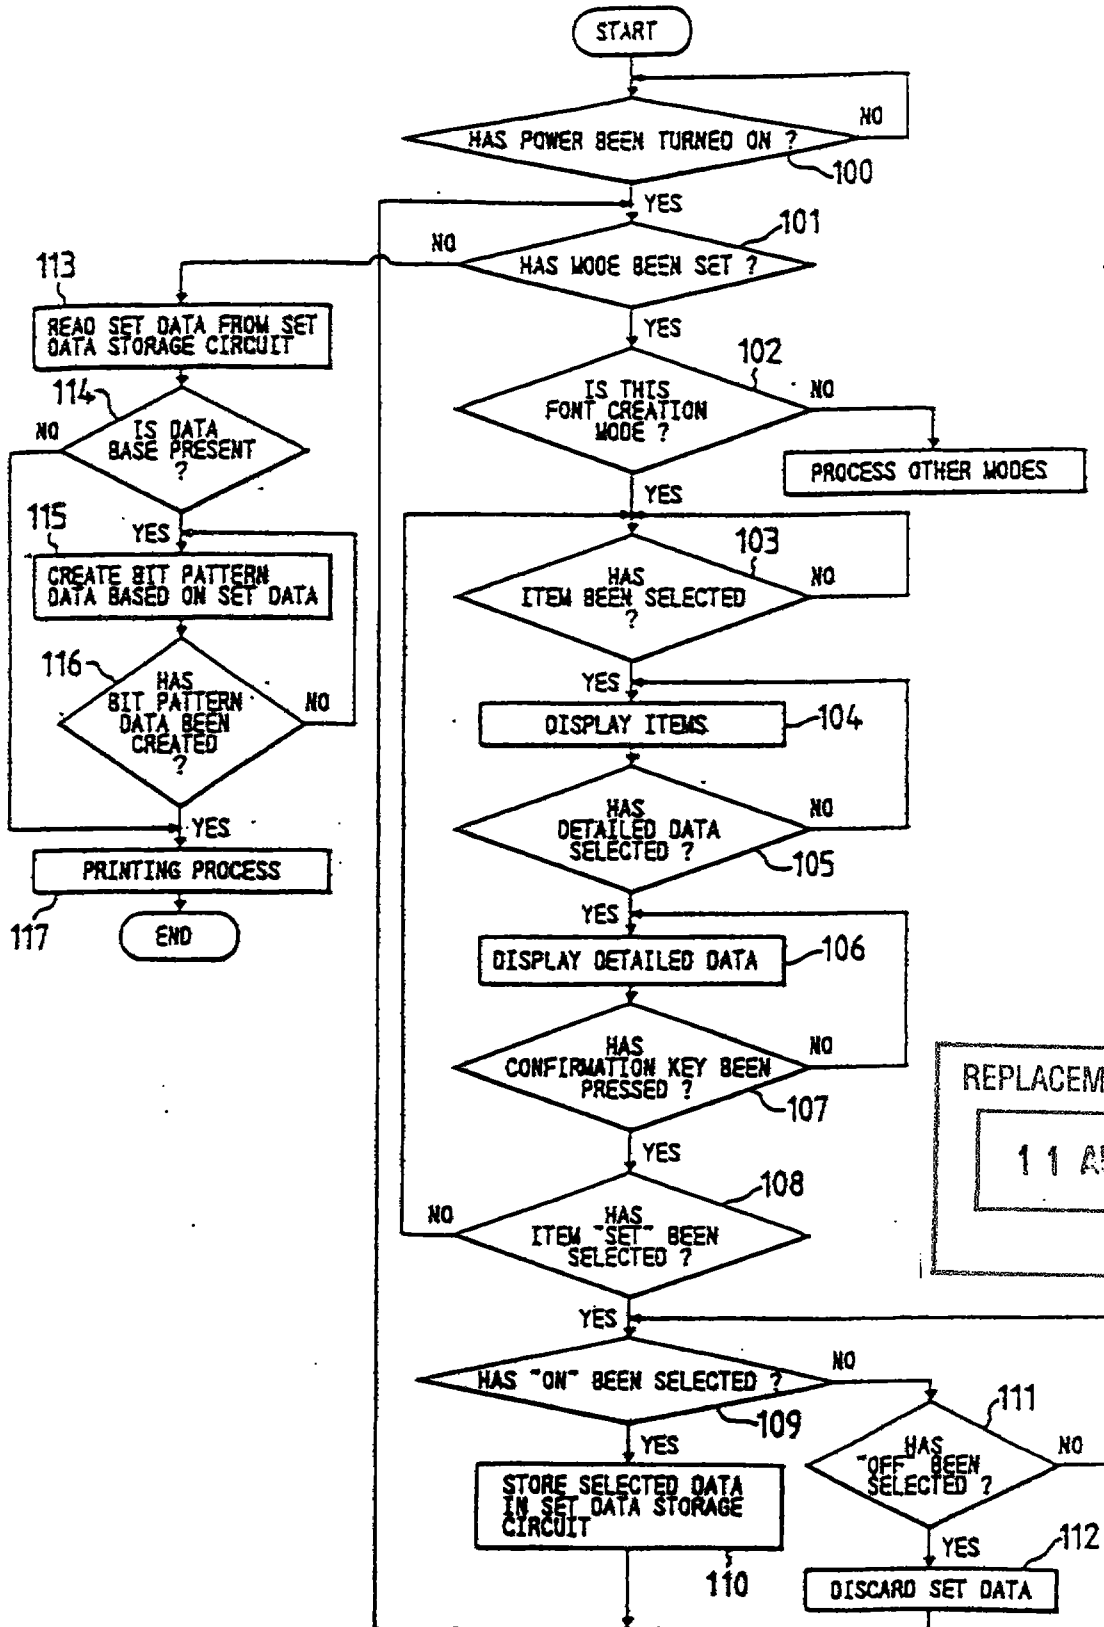


FIG. 6

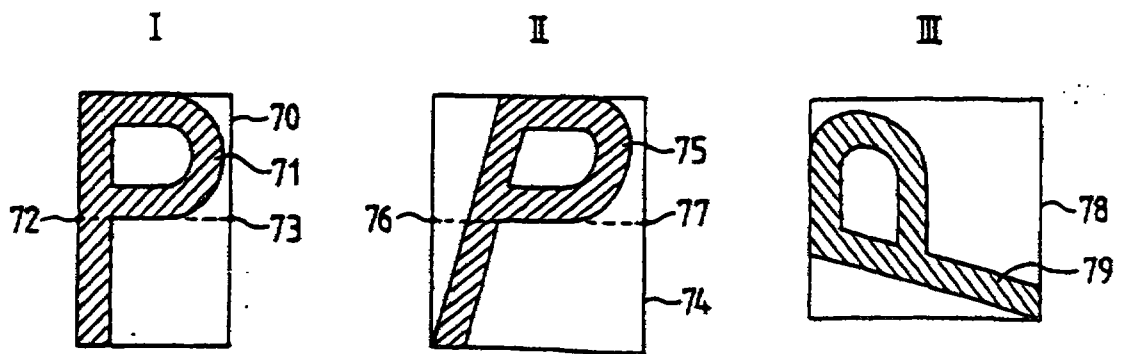

REPLACEMENT SHEET

11 AUG 1999