

PROCESSES FOR PRODUCING DENATURED ETHANOL

PRIORITY CLAIM

[0001] This application claims priority to U.S. Provisional App. No. 61/300,815, filed on February 2, 2010, U.S. Provisional App. No. 61/332,727, filed on May 7, 2010, U.S. Provisional Application No. 61/332,696, filed on May 7, 2010, and U.S. App. No. 12/889,260, filed on September 23, 2010, the entireties of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates generally to processes for producing a denatured ethanol composition and, in particular, to processes for producing a denatured ethanol composition via the hydrogenation of acetic acid, which forms a crude ethanol product and a denaturant.

BACKGROUND OF THE INVENTION

[0003] Ethanol is often produced for and utilized as a component in various consumable products, e.g., beer, wine, and spirits. Typically, ethanol intended for such uses is produced via fermentation. Many government agencies impose high duties or taxes on consumable ethanol, thereby increasing the cost to consumers.

[0004] There are, however, many other uses for ethanol that do not involve consumption, e.g., fuels, chemical solvents, or pharmaceuticals. As such, in an effort to provide inexpensive ethanol for non-consumable uses, the duties or taxes imposed on consumable ethanol are typically not required for ethanol that is not intended to be consumed. To ensure that such ethanol compositions are used for non-consumable applications, most countries have laws and regulations requiring that these ethanol compositions include a denaturant, which is added to an otherwise substantially pure ethanol composition in order to render the ethanol non-potable. Thus, ethanol compositions that include a denaturant and which are not intended for consumption are commonly referred to as “denatured ethanol” or “denatured alcohol.” Conventional denaturants include methanol, isopropyl alcohol, acetone, methyl ethyl ketone, ethyl acetate, methyl isobutyl ketone, and acetaldehyde.

[0005] The processing step of adding a denaturant to an otherwise potable ethanol composition adds complication and cost to in conventional processes for forming denatured ethanol. Thus, the need exists for new and improved processes for forming denatured ethanol.

SUMMARY OF THE INVENTION

[0006] In a first embodiment, the present invention is directed to a process for producing a denatured ethanol composition, the process comprising hydrogenating acetic acid in the presence of a catalyst to form a crude ethanol product comprising ethanol, and at least one denaturant; separating the crude ethanol product in one or more separation units into a denatured ethanol composition and one or more derivative streams, wherein the denatured ethanol composition, as formed, comprises from 0.01 wt.% to 40 wt % denaturant, based on the total weight of the denatured ethanol composition.

[0007] In a second embodiment, the present invention is directed to a process for producing a denatured ethanol composition, the process comprising hydrogenating acetic acid in the presence of a catalyst to form a crude ethanol product comprising ethanol and a denaturant; separating the crude ethanol product into an ethanol stream and at least one derivative stream comprising separated denaturant; further purifying the ethanol stream to form a purified ethanol stream; and combining at least a portion of the separated denaturant with the purified ethanol stream to produce the denatured ethanol composition.

BRIEF DESCRIPTION OF DRAWINGS

[0008] The invention is described in detail below with reference to the appended drawings, wherein like numerals designate similar parts.

[0009] FIG. 1A is a schematic diagram of a hydrogenation system in accordance with one embodiment of the present invention.

[0010] FIG. 1B is a schematic diagram of the system shown in FIG. 1A with a return of the distillate of a second column to the reactor zone.

[0011] FIG. 1C is a schematic diagram of a hydrogenation system in accordance with one embodiment of the present invention.

[0012] FIG. 2 is a graph showing the composition of an exemplary second residue stream at various tray positions within a third column.

DETAILED DESCRIPTION OF THE INVENTION


[0013] Conventional denatured ethanol preparation processes begin with the production of a purified ethanol. In these processes, ethanol may be formed and subsequently purified by conventional methods. A denaturant is then added to the purified ethanol to form the denatured ethanol.

[0014] The present invention relates to processes for producing denatured ethanol compositions. In one embodiment, the invention is to a process comprising the steps of hydrogenating acetic acid, e.g., in the presence of a catalyst, to form a crude ethanol product. The crude ethanol product comprises at least one, e.g., at least two or at least three, denaturant(s). In one embodiment, the denaturant(s) may be co-produced with the ethanol. In another embodiment, the denaturant(s) are formed as a by-product of the hydrogenation reaction. In other words, the denaturant is formed *in situ* with the ethanol. The processes of the present invention, in one embodiment, further comprise separating the crude ethanol product into a denatured ethanol composition and one or more derivative streams. The separating may be performed in one or more, e.g., two or more, or three or more, separation units, e.g., distillation columns. The resultant denatured ethanol composition, as formed, is derived from acetic acid and comprises from 0.01 wt.% to 40 wt.% denaturant, e.g., from 0.01 wt.% to 25 wt.%, from 0.01 wt.% to 20 wt.%, or from 1 wt.% to 15 wt.%, and from 50 wt.% to 99 wt.% ethanol, e.g.,

from 60 wt.% to 99 wt.% or from 70 wt.% to 95 wt.%, based on the total weight of the denatured ethanol composition. Thus, by forming the denaturant *in situ* along with the ethanol in the hydrogenation step, the inventive processes may produce denatured ethanol more efficiently and may reduce processing steps. In particular, the processes of the present invention may eliminate the need for separately producing or obtaining a denaturant and subsequently adding the denaturant to ethanol.

[0015] In another embodiment, the invention is to a process for producing a denatured ethanol composition where the denaturant is formed from the hydrogenation of acetone, which may be added to the reaction zone or formed as an intermediate *in situ* as a by-product from acetic acid hydrogenation. In one aspect, for example, the process comprises the step of contacting acetic acid and acetone to form an acetic acid reaction mixture. The process further comprises hydrogenating the acetic acid reaction mixture in the presence of a catalyst to form a crude ethanol product comprising ethanol and isopropanol. In one embodiment, the acetone is formed in an auxiliary acetone reactor or is obtained from an external source. Once formed or obtained, the acetone may be contacted with the acetic acid as discussed above. In another aspect, the catalyst or reaction conditions employed in the hydrogenation reaction are selected such that acetone is formed as a by-product of the acetic acid hydrogenation reaction. Once formed, the acetone intermediate may be hydrogenated to form isopropanol denaturant. In these embodiments, the ethanol is co-produced with the isopropanol denaturant. Preferably, the ethanol and the isopropanol are produced in the same reactor. The processes of the present invention, in one embodiment, further comprise separating the crude ethanol product into a denatured ethanol composition and one or more derivative streams. The resultant denatured ethanol composition, as formed, comprises from 0.01 wt.% to 10 wt.% isopropanol denaturant, e.g., from 0.01 wt.% to 5 wt.%, or from 0.01 wt.% to 3 wt.%, and from 50 wt.% to 99 wt.% ethanol, e.g., from 60 wt.% to 99 wt.% or from 70 wt.% to 95 wt.%, based on the total weight of the denatured ethanol composition.

[0016] The hydrogenation of acetic acid to form ethanol and water may be represented by the following reaction:

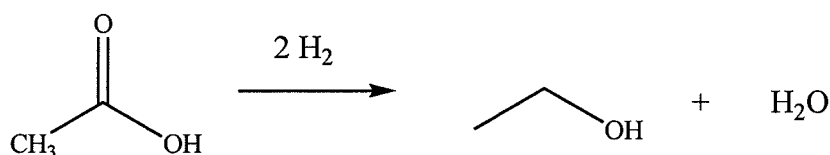

[0017] Suitable hydrogenation catalysts include catalysts comprising a first metal and optionally one or more of a second metal, a third metal or additional metals, optionally on a catalyst support. The first and optional second and third metals may be selected from Group IB, IIB, IIIB, IVB, VB, VIB, VIIB, VIII transitional metals, a lanthanide metal, an actinide metal or a metal selected from any of Groups IIIA, IVA, VA, and VIA. Preferred metal combinations for some exemplary catalyst compositions include platinum/tin, platinum/ruthenium, platinum/rhenium, palladium/ruthenium, palladium/rhenium, cobalt/palladium, cobalt/platinum, cobalt/chromium, cobalt/ruthenium, silver/palladium, copper/palladium, nickel/palladium, gold/palladium, ruthenium/rhenium, and ruthenium/iron. Exemplary catalysts are further described in U.S. Patent Nos. 7,608,744, and 7,863,489, and U.S. Publication No. 2010/0197485, the entireties of which are incorporated herein by reference.

[0018] In one exemplary embodiment, the catalyst comprises a first metal selected from the group consisting of copper, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum, titanium, zinc, chromium, rhenium, molybdenum, and tungsten. Preferably, the first metal is selected from the group consisting of platinum, palladium, cobalt, nickel, and ruthenium. More preferably, the first metal is selected from platinum and palladium. When the first metal comprises platinum, it is preferred that the catalyst comprises platinum in an amount less than 5 wt.%, e.g., less than 3 wt.% or less than 1 wt.%, due to the high demand for platinum.

[0019] As indicated above, the catalyst optionally further comprises a second metal, which typically would function as a promoter. If present, the second metal preferably is selected from the group consisting of copper, molybdenum, tin, chromium, iron, cobalt, vanadium, tungsten, palladium, platinum, lanthanum, cerium, manganese, ruthenium, rhenium, gold, and nickel. More preferably, the second metal is selected from the group consisting of copper, tin, cobalt, rhenium, and nickel. More preferably, the second metal is selected from tin and rhenium.

[0020] If the catalyst includes two or more metals, e.g., a first metal and a second metal, the first metal optionally is present in the catalyst in an amount from 0.1 wt.% to 10 wt.%, e.g., from

0.1 wt.% to 5 wt.%, or from 0.1 wt.% to 3 wt.%. The second metal preferably is present in an amount from 0.1 wt.% and 20 wt.%, e.g., from 0.1 wt.% to 10 wt.%, or from 0.1 wt.% to 5 wt.%. For catalysts comprising two or more metals, the two or more metals may be alloyed with one another or may comprise a non-alloyed metal solution or mixture.

[0021] The preferred metal ratios may vary depending on the metals used in the catalyst. In some exemplary embodiments, the mole ratio of the first metal to the second metal is from 10:1 to 1:10, e.g., from 4:1 to 1:4, from 2:1 to 1:2, from 1.5:1 to 1:1.5 or from 1.1:1 to 1:1.1.

[0022] The catalyst may also comprise a third metal selected from any of the metals listed above in connection with the first or second metal, so long as the third metal is different from the first and second metals. In preferred aspects, the third metal is selected from the group consisting of cobalt, palladium, ruthenium, copper, zinc, platinum, tin, and rhenium. More preferably, the third metal is selected from cobalt, palladium, and ruthenium. When present, the total weight of the third metal preferably is from 0.05 wt.% and 4 wt.%, e.g., from 0.1 wt.% to 3 wt.%, or from 0.1 wt.% to 2 wt.%.

[0023] In addition to one or more metals, the exemplary catalysts further comprise a support or a modified support, meaning a support that includes a support material and a support modifier, which adjusts the acidity of the support material. The total weight of the support or modified support, based on the total weight of the catalyst, preferably is from 75 wt.% to 99.9 wt.%, e.g., from 78 wt.% to 97 wt.%, or from 80 wt.% to 95 wt.%. In preferred embodiments that use a modified support, the support modifier is present in an amount from 0.1 wt.% to 50 wt.%, e.g., from 0.2 wt.% to 25 wt.%, from 0.5 wt.% to 15 wt.%, or from 1 wt.% to 8 wt.%, based on the total weight of the catalyst.

[0024] Suitable support materials may include, for example, stable metal oxide-based supports or ceramic-based supports. Preferred supports include siliceous supports, such as silica, silica/alumina, a Group IIA silicate such as calcium metasilicate, pyrogenic silica, high purity silica, and mixtures thereof. Other supports may include, but are not limited to, iron oxide, alumina, titania, zirconia, magnesium oxide, carbon, graphite, high surface area graphitized carbon, activated carbons, and mixtures thereof.

[0025] In the production of ethanol, the catalyst support may be modified with a support modifier. Preferably, the support modifier is a basic modifier that has a low volatility or no

volatility. Such basic modifiers, for example, may be selected from the group consisting of: (i) alkaline earth oxides, (ii) alkali metal oxides, (iii) alkaline earth metal metasilicates, (iv) alkali metal metasilicates, (v) Group IIB metal oxides, (vi) Group IIB metal metasilicates, (vii) Group IIIB metal oxides, (viii) Group IIIB metal metasilicates, and mixtures thereof. In addition to oxides and metasilicates, other types of modifiers including nitrates, nitrites, acetates, and lactates may be used. Preferably, the support modifier is selected from the group consisting of oxides and metasilicates of any of sodium, potassium, magnesium, calcium, scandium, yttrium, and zinc, as well as mixtures of any of the foregoing. Preferably, the support modifier is a calcium silicate, and more preferably calcium metasilicate (CaSiO_3). If the support modifier comprises calcium metasilicate, it is preferred that at least a portion of the calcium metasilicate is in crystalline form.

[0026] A preferred silica support material is SS61138 High Surface Area (HSA) Silica Catalyst Carrier from Saint Gobain NorPro. The Saint-Gobain NorPro SS61138 silica contains approximately 95 wt.% high surface area silica; a surface area of about $250 \text{ m}^2/\text{g}$; a median pore diameter of about 12 nm; an average pore volume of about $1.0 \text{ cm}^3/\text{g}$ as measured by mercury intrusion porosimetry and a packing density of about 0.352 g/cm^3 (22 lb/ft^3).

[0027] A preferred silica/alumina support material is KA-160 (Sud Chemie) silica spheres having a nominal diameter of about 5 mm, a density of about 0.562 g/ml, in absorptivity of about 0.583 g $\text{H}_2\text{O}/\text{g}$ support, a surface area of about 160 to $175 \text{ m}^2/\text{g}$, and a pore volume of about 0.68 ml/g.

[0028] As will be appreciated by those of ordinary skill in the art, support materials are selected such that the catalyst system is suitably active, selective and robust under the process conditions employed for the formation of ethanol.

[0029] The metals of the catalysts may be dispersed throughout the support, coated on the outer surface of the support (egg shell) or decorated on the surface of the support.

[0030] The catalyst compositions suitable for use with the present invention preferably are formed through metal impregnation of the modified support, although other processes such as chemical vapor deposition may also be employed. Such impregnation techniques are described in U.S. Patent Nos. 7,608,744, and 7,863,489, and U.S. Publication No. 2010/0197485, the entireties of which are incorporated herein by reference.

[0031] Some embodiments of the process of hydrogenating acetic acid to form ethanol according to one embodiment of the invention may include a variety of configurations using a fixed bed reactor or a fluidized bed reactor, as one of skill in the art will readily appreciate. In many embodiments of the present invention, an “adiabatic” reactor can be used; that is, there is little or no need for internal plumbing through the reaction zone to add or remove heat. In other embodiments, radial flow reactor or reactors may be employed, or a series of reactors may be employed with or without heat exchange, quenching, or introduction of additional feed material. Alternatively, a shell and tube reactor provided with a heat transfer medium may be used. In many cases, the reaction zone may be housed in a single vessel or in a series of vessels with heat exchangers therebetween.

[0032] In preferred embodiments, the catalyst is employed in a fixed bed reactor, e.g., in the shape of a pipe or tube, where the reactants, typically in the vapor form, are passed over or through the catalyst. Other reactors, such as fluid or ebullient bed reactors, can be employed. In some instances, the hydrogenation catalysts may be used in conjunction with an inert material to regulate the pressure drop of the reactant stream through the catalyst bed and the contact time of the reactant compounds with the catalyst particles.

[0033] The hydrogenation reaction may be carried out in either the liquid phase or vapor phase. Preferably, the reaction is carried out in the vapor phase under the following conditions. The reaction temperature may range from 125°C to 350°C, e.g., from 200°C to 325°C, from 225°C to 300°C, or from 250°C to 300°C. The pressure may range from 10 KPa to 3000 KPa (about 1.5 to 435 psi), e.g., from 50 KPa to 2300 KPa, or from 100 KPa to 1500 KPa. The reactants may be fed to the reactor at a gas hourly space velocity (GHSV) of greater than 500 hr⁻¹, e.g., greater than 1000 hr⁻¹, greater than 2500 hr⁻¹ or even greater than 5000 hr⁻¹. In terms of ranges the GHSV may range from 50 hr⁻¹ to 50,000 hr⁻¹, e.g., from 500 hr⁻¹ to 30,000 hr⁻¹, from 1000 hr⁻¹ to 10,000 hr⁻¹, or from 1000 hr⁻¹ to 6500 hr⁻¹.

[0034] The hydrogenation optionally is carried out at a pressure just sufficient to overcome the pressure drop across the catalytic bed at the GHSV selected, although there is no bar to the use of higher pressures, it being understood that considerable pressure drop through the reactor bed may be experienced at high space velocities, e.g., 5000 hr⁻¹ or 6,500 hr⁻¹.

[0035] Although the reaction consumes two moles of hydrogen per mole of acetic acid to produce one mole of ethanol, the actual molar ratio of hydrogen to acetic acid in the feed stream may vary from about 100:1 to 1:100, e.g., from 50:1 to 1:50, from 20:1 to 1:2, or from 12:1 to 1:1. Most preferably, the molar ratio of hydrogen to acetic acid is greater than 2:1, e.g., greater than 4:1 or greater than 8:1.

[0036] Contact or residence time can also vary widely, depending upon such variables as amount of acetic acid, catalyst, reactor, temperature and pressure. Typical contact times range from a fraction of a second to more than several hours when a catalyst system other than a fixed bed is used, with preferred contact times, at least for vapor phase reactions, of from 0.1 to 100 seconds, e.g., from 0.3 to 80 seconds or from 0.4 to 30 seconds.

[0037] The raw materials, acetic acid and hydrogen, used in connection with the process of this invention may be derived from any suitable source including natural gas, petroleum, coal, biomass, and so forth. As examples, acetic acid may be produced via methanol carbonylation, acetaldehyde oxidation, ethylene oxidation, oxidative fermentation, and anaerobic fermentation. As petroleum and natural gas prices fluctuate, becoming either more or less expensive, methods for producing acetic acid and intermediates such as methanol and carbon monoxide from alternate carbon sources have drawn increasing interest. In particular, when petroleum is relatively expensive compared to natural gas, it may become advantageous to produce acetic acid from synthesis gas ("syn gas") that is derived from any available carbon source. United States Patent No. 6,232,352, the disclosure of which is incorporated herein by reference, for example, teaches a method of retrofitting a methanol plant for the manufacture of acetic acid. By retrofitting a methanol plant, the large capital costs associated with carbon monoxide generation for a new acetic acid plant are significantly reduced or largely eliminated. All or part of the syn gas is diverted from the methanol synthesis loop and supplied to a separator unit to recover carbon monoxide and hydrogen, which are then used to produce acetic acid. In addition to acetic acid, such a process can also be used to make hydrogen which may be utilized in connection with this invention.

[0038] Methanol carbonylation processes suitable for production of acetic acid are described in U.S. Patent Nos. 7,208,624, 7,115,772, 7,005,541, 6,657,078, 6,627,770, 6,143,930, 5,599,976, 5,144,068, 5,026,908, 5,001,259, and 4,994,608, the disclosures of which are

incorporated herein by reference. Optionally, the production of ethanol may be integrated with such methanol carbonylation processes.

[0039] U.S. Patent No. RE 35,377 also incorporated herein by reference, provides a method for the production of methanol by conversion of carbonaceous materials such as oil, coal, natural gas and biomass materials. The process includes hydrogasification of solid and/or liquid carbonaceous materials to obtain a process gas which is steam pyrolyzed with additional natural gas to form synthesis gas. The syn gas is converted to methanol which may be carbonylated to acetic acid. The method likewise produces hydrogen which may be used in connection with this invention as noted above. U.S. Patent No. 5,821,111, which discloses a process for converting waste biomass through gasification into synthesis gas as well as U.S. Patent No. 6,685,754, the disclosures of which are incorporated herein by reference.

[0040] In one optional embodiment, the acetic acid feed stream fed to the hydrogenation reaction comprises acetic acid and may also comprise other carboxylic acids, e.g., propionic acid, esters, and anhydrides, as well as acetaldehyde and acetone. In one embodiment, the acetic acid fed to the hydrogenation reaction comprises propionic acid. For example the propionic acid in the acetic acid feed stream may range from 0.001 wt.% to 15 wt.%, e.g., from 0.001 wt.% to 0.11 wt.%, from 0.125 wt.% to 12.5 wt.%, from 1.25 wt.% to 11.25, or from 3.75 wt.% to 8.75 wt.%. Thus, the acetic acid feed stream may be a cruder acetic acid feed stream, e.g., a less-refined acetic acid feed stream. In these embodiments, the propionic acid in the acetic acid feed stream is hydrogenated to form n-propanol, which may serve as a denaturant. The n-propanol may be present in the denatured ethanol composition an amount ranging from 0.001 wt.% to 15 wt.%, e.g., from 0.001 wt.% to 0.11 wt.%, 0.13 wt.% to 13.2 wt.%, from 1.3 wt.% to 11.9 wt.%, or from 4 wt.% to 9.3 wt.%.

[0041] Alternatively, acetic acid in vapor form may be taken directly as crude product from the flash vessel of a methanol carbonylation unit of the class described in United States Patent No. 6,657,078, the entirety of which is incorporated herein by reference. The crude vapor product, for example, may be fed directly to the ethanol synthesis reaction zones of the present invention without the need for condensing the acetic acid and light ends or removing water, saving overall processing costs.

[0042] In one embodiment, acetone is added to the reactor as a reactant in addition to the acetic acid and hydrogen. Without being bound by theory, it is believed that the addition of acetone to the reaction provides for the production of isopropanol, which may serve as a denaturant. In another aspect, acetone is formed as a by-product of the hydrogenation of acetic acid. Once formed, the acetone may be hydrogenated to form isopropanol as denaturant. In some embodiments, where an isopropanol denaturant is desired, separate catalysts may be utilized to yield a higher concentration of acetone, which, upon subsequent hydrogenation, would result in a higher concentration of isopropanol in the crude ethanol composition. As an example, a catalyst composition comprising a support such as TiO_2 , ZrO_2 , Fe_2O_3 , or CeO_2 may be used. Other exemplary catalyst compositions include ruthenium supported by SiO_2 , iron supported by carbon, or palladium supported by carbon.

[0043] In one embodiment, the acetone is formed in an auxiliary reaction performed in an auxiliary acetone reactor. As an example, acetic acid may be reacted in the auxiliary reactor under conditions effective to form the acetone, e.g., ketonization. The acetic acid fed to the auxiliary reactor may be drawn from the acetic acid feed stream fed to the hydrogenation reactor. The auxiliary reactor may be of the types discussed above. For example, the auxiliary reactor may be a fixed bed reactor that has a catalyst disposed therein. Preferably, the auxiliary reactor is in the shape of a pipe or tube, where the reactants, typically in the vapor form, are passed over or through the catalyst, which is disposed in the pipe or tube. In some embodiments, the auxiliary reactor utilizes a catalyst that promotes ketonization and/or favors the production of acetone. As an example, the catalyst may comprise a basic catalyst, e.g., thorium oxide. In some embodiments, the acetone yielded by the auxiliary reactor is directed to the hydrogenation reactor as a reactant in addition to the acetic acid and the hydrogen.

[0044] The acetic acid may be vaporized at the reaction temperature, following which the vaporized acetic acid can be fed along with hydrogen in an undiluted state or diluted with a relatively inert carrier gas, such as nitrogen, argon, helium, carbon dioxide and the like. For reactions run in the vapor phase, the temperature should be controlled in the system such that it does not fall below the dew point of acetic acid. In one embodiment the acetic acid may be vaporized at the boiling point of acetic acid at the particular pressure, and then the vaporized acetic acid may be further heated to the reactor inlet temperature. In another embodiment, the

acetic acid is transferred to the vapor state by passing hydrogen, recycle gas, another suitable gas, or mixtures thereof through the acetic acid at a temperature below the boiling point of acetic acid, thereby humidifying the carrier gas with acetic acid vapors, followed by heating the mixed vapors up to the reactor inlet temperature. Preferably, the acetic acid is transferred to the vapor by passing hydrogen and/or recycle gas through the acetic acid at a temperature at or below 125°C, followed by heating of the combined gaseous stream to the reactor inlet temperature.

[0045] In particular, the hydrogenation of acetic acid may achieve favorable conversion of acetic acid and favorable selectivity and productivity to ethanol. For purposes of the present invention, the term “conversion” refers to the amount of acetic acid in the feed that is converted to a compound other than acetic acid. Conversion is expressed as a mole percentage based on acetic acid in the feed. The conversion may be at least 10%, e.g., at least 20%, at least 40%, at least 50%, at least 60%, at least 70% or at least 80%. Although catalysts that have high conversions are desirable, such as at least 80% or at least 90%, in some embodiments a low conversion may be acceptable at high selectivity for ethanol. It is, of course, well understood that in many cases, it is possible to compensate for conversion by appropriate recycle streams or use of larger reactors, but it is more difficult to compensate for poor selectivity:

[0046] Selectivity is expressed as a mole percent based on converted acetic acid. It should be understood that each compound converted from acetic acid has an independent selectivity and that selectivity is independent from conversion. For example, if 50 mole % of the converted acetic acid is converted to ethanol, we refer to the ethanol selectivity as 50%. Preferably, the catalyst selectivity to ethoxylates is at least 60%, e.g., at least 70%, or at least 80%. As used herein, the term “ethoxylates” refers specifically to the compounds ethanol, acetaldehyde, and ethyl acetate. Preferably, the selectivity to ethanol is at least 80%, e.g., at least 85% or at least 88%. Preferred embodiments of the hydrogenation process also have low selectivity to undesirable products, such as methane, ethane, and carbon dioxide. The selectivity to these undesirable products preferably is less than 4%, e.g., less than 2% or less than 1%. More preferably, these undesirable products are not detectable. Formation of alkanes may be low, and ideally less than 2%, less than 1%, or less than 0.5% of the acetic acid passed over the catalyst is converted to alkanes, which have little value other than as fuel.

[0047] The term “productivity,” as used herein, refers to the grams of a specified product, e.g., ethanol, formed during the hydrogenation based on the kilograms of catalyst used per hour. A productivity of at least 200 grams of ethanol per kilogram catalyst per hour, e.g., at least 400 or at least 600, is preferred. In terms of ranges, the productivity preferably is from 200 to 3,000 grams of ethanol per kilogram catalyst per hour, e.g., from 400 to 2,500 or from 600 to 2,000.

[0048] In various embodiments, the crude ethanol product produced by the hydrogenation process, before any subsequent processing, such as purification and separation, will typically comprise unreacted acetic acid, ethanol, and water. As used herein, the term “crude ethanol product” refers to any composition comprising from 5 wt.% to 70 wt.% ethanol and from 5 wt.% to 35 wt.% water. In some exemplary embodiments, the crude ethanol product comprises ethanol in an amount from 5 wt.% to 70 wt.%, e.g., from 10 wt.% to 60 wt.%, or from 15 wt.% to 50 wt.%, based on the total weight of the crude ethanol product. Preferably, the crude ethanol product comprises at least 10 wt.% ethanol, at least 15 wt.% ethanol, or at least 20 wt.% ethanol.

[0049] The crude ethanol product typically will further comprise unreacted acetic acid, depending on conversion, for example, in an amount of less than 90 wt.%, e.g., less than 80 wt.% or less than 70 wt.%. In terms of ranges, the unreacted acetic acid is preferably present in amounts from 0 to 90 wt.%, e.g., from 5 wt.% to 80 wt.%, from 15 wt.% to 70 wt.%, from 20 wt.% to 70 wt.% or from 25 wt.% to 65 wt.%. Where acetone is included as a reactant, the crude ethanol product may comprise from 0.01 wt.% to 10 wt.% isopropanol, e.g., from 0.1 wt.% to 10 wt.%, from 1 wt.% to 9 wt.% or from 3 wt.% to 7 wt.%. In other embodiments, the crude ethanol product comprises from 0.01 wt. % to 20 wt.% diethyl ether, e.g., from 0.1 wt.% to 10 wt.%, from 1 wt.% to 9 wt.% or from 3 wt.% to 7 wt.%. As water is formed in the reaction process, the crude ethanol product will generally comprise water, for example, in amounts ranging from 5 wt.% to 35 wt.%, e.g., from 10 wt.% to 30 wt.% or from 10 wt.% to 26 wt.%. Ethyl acetate may also be produced during the hydrogenation of acetic acid or through side reactions. In these embodiments, the crude ethanol product comprises ethyl acetate in amounts ranging from 0 to 20 wt.%, e.g., from 0 to 15 wt.%, from 1 to 12 wt.% or from 3 to 10 wt.%. Acetaldehyde may also be produced through side reactions. In these embodiments, the crude ethanol product comprises acetaldehyde in amounts ranging from 0 to 10 wt.%, e.g., from 0 to 3 wt.%, from 0.1 to 3 wt.% or from 0.2 to 2 wt.%. In some embodiments where propionic

acid is included as a reactant, the n-propanol formed via hydrogenation may be present in the crude ethanol product an amount ranging from 0.001 wt.% to 15 wt.%, e.g., from 0.001 wt.% to 0.11 wt.%, 0.13 wt.% to 13.2 wt.%, from 1.3 wt.% to 11.9 wt.%, or from 4 wt.% to 9.3 wt.%.

[0050] Thus, the hydrogenation reaction produces a crude ethanol product that may comprise, *inter alia*, denaturants such as acetic acid, isopropanol, ethyl acetate, diethyl ether, acetaldehyde, and/or n-propanol. Each of these *in situ*-formed compounds, alone or in combination with one another, may serve as a denaturant in a denatured ethanol composition. In some embodiments, all or a portion of the crude ethanol product may be combined with a purified ethanol stream to form a denatured ethanol composition. It is within the scope of the invention to adjust the reaction parameters to achieve desired crude ethanol product and, thus, a desired denatured ethanol composition. In one embodiment, amount of reactants, e.g., acetic acid, acetone, and/or propionic acid, etc., fed to the hydrogenation reactor may be adjusted so as to achieve a specific amount of one or more components, e.g., denaturants, in the crude ethanol product. The denaturant, thus produced, may be combined with a purified ethanol stream to form a denatured ethanol composition. For example, a denatured ethanol composition comprising about 5 parts isopropanol to 100 parts ethanol, may be produced by feeding an acetic acid stream comprising acetic acid and acetone. As another example, a denatured ethanol composition comprising about 5 parts n-propanol to 100 parts ethanol, may be produced by feeding an acetic acid stream comprising acetic acid and propionic acid. It is further within the scope of the invention to adjust additional hydrogenation reactor parameters to achieve a crude ethanol product comprising a desired amount of a particular denaturant or combination of denaturants. For example, in order to produce a crude ethanol product comprising about 10 parts diethyl ether, a hydrogenation catalyst having an acidic support may be utilized as described in co-pending US Application No. 12/850,414, entitled "Processes for Making Diethyl Ether from Acetic Acid," filed on August 4, 2010, the entire contents and disclosure of which is hereby incorporated by reference.

[0051] In one embodiment, because it is difficult to separate isopropanol and ethanol from one another, all or a portion of the isopropanol formed in the hydrogenation reaction may follow the ethanol through the separation scheme.

[0052] Because the crude ethanol composition, as formed, may contain *in situ*-formed denaturant(s), at least a portion of the crude ethanol composition, with or without further separation, may be combined with a purified ethanol stream to form a denatured ethanol composition. In one embodiment, one or more of the *in situ*-formed denaturants may be separated from the crude ethanol product and combined with a purified ethanol stream. In other embodiments, at least a portion, e.g., an aliquot portion, of the crude ethanol product may be combined with a purified ethanol stream. For example, when the crude ethanol product comprises n-propanol, at least a portion of an n-propanol-containing crude ethanol product may be combined with a purified ethanol stream to form a denatured ethanol composition comprising an n-propanol denaturant. In another embodiment, at least a portion of the n-propanol is separated from the crude ethanol product and combined with a purified ethanol stream to form an n-propanol denatured ethanol composition. As another example, where acetic acid is the desired denaturant, at least a portion of an acetic acid-containing crude ethanol composition may be combined with a purified ethanol stream to form a denatured ethanol composition comprising an acetic acid denaturant. In another embodiment, at least a portion of the acetic acid in the acetic acid feed and/or in any of the acetic acid recycle streams may be combined with a purified ethanol stream to form an acetic acid-denatured ethanol composition.

[0053] Other components, such as, for example, esters, ethers, aldehydes, ketones, alkanes, and carbon dioxide, if detectable, collectively may be present in amounts less than 10 wt.%, e.g., less than 6 wt.%, or less than 4 wt.%. In terms of ranges, the crude ethanol composition may comprise the other components in an amount from 0.1 wt.% to 10 wt.%, e.g., from 0.1 wt.% to 6 wt.%, or from 0.1 wt.% to 4 wt.%. Exemplary embodiments of crude ethanol compositional ranges are provided in Table 1.

TABLE 1
CRUDE ETHANOL PRODUCT COMPOSITIONS

Component	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
Ethanol	5 to 70	10 to 60	15 to 50	25 to 50
Acetic Acid	0 to 90	5 to 80	15 to 70	20 to 70
Water	5 to 35	5 to 30	10 to 30	10 to 26
Ethyl Acetate	0 to 20	0 to 15	1 to 12	3 to 10
Acetaldehyde	0 to 10	0 to 3	0.1 to 3	0.2 to 2
Others	0.1 to 10	0.1 to 6	0.1 to 4	--

[0054] As shown in Table 1, in some embodiments the crude ethanol product may be a denatured ethanol composition. For example, the crude ethanol composition may comprise ethanol and at least one denaturant such as acetic acid, ethyl acetate, or acetaldehyde. In other embodiments, the crude ethanol composition may be a denatured ethanol composition comprising at least one of the denaturants discussed above.

[0055] FIG. 1A shows a hydrogenation system 100 suitable for the hydrogenation of acetic acid and separating ethanol from the crude reaction mixture according to one embodiment of the invention. System 100 comprises reaction zone 101 and distillation zone 102. Reaction zone 101 comprises reactor 103, hydrogen feed line 104 and acetic acid feed line 105. In other embodiments, where acetone utilized as a reactant, reaction zone 101 further comprises an acetone feed line (not shown). In other embodiments, where propionic acid utilized as a reactant, reaction zone 101 further comprises a propionic acid feed line (not shown). Distillation zone 102 comprises flasher 106, first column 107, second column 108, and third column 109. Hydrogen, acetic acid, and optionally acetone and/or propionic acid are fed to a vaporizer 110 via lines 104 and 105, respectively, to create a vapor feed stream in line 111 that is directed to reactor 103. In one embodiment, lines 104 and 105 may be combined and jointly fed to the vaporizer 110, e.g., in one stream containing both hydrogen and acetic acid. The temperature of the vapor feed stream in line 111 is preferably from 100°C to 350°C, e.g., from 120°C to 310°C or from 150°C to 300°C. Any feed that is not vaporized is removed from vaporizer 110, as shown in FIG. 1A, and may be recycled thereto. In addition, although FIG. 1A shows line 111 being directed to the top of reactor 103, line 111 may be directed to the side, upper portion, or bottom of reactor 103. Although one reactor and one flasher are shown in FIGS. 1A, 1B and

1C, additional reactors and/or components may be included in various optional embodiments of the present invention. For example, the hydrogenation system may optionally comprise dual reactors, dual flashers, heat exchanger(s), and/or pre-heater(s).

[0056] Reactor 103 contains the catalyst that is used in the hydrogenation of the carboxylic acid, preferably acetic acid. In some embodiment where acetone is a reactant and isopropanol is a desired co-product with ethanol, the catalyst in reactor 103 is selected such that, in addition to ethanol, isopropanol is also produced. As an example, a catalyst composition comprising a support such as TiO_2 , ZrO_2 , Fe_2O_3 , or CeO_2 may be used. In some embodiments, these catalysts promote higher acetone formation. Other exemplary catalyst compositions include ruthenium supported by SiO_2 , iron supported by carbon, or palladium supported by carbon. In other embodiments, the temperature of reactor 103 may be adjusted to achieve a desired isopropanol concentration. For example, maintaining the reaction temperature in a range of 200 °C to 350 °C, e.g., from 225 °C to 300 °C, may lead to an ethanol composition comprising from 0.1 wt. % to 10 wt.% isopropanol, e.g., from 1 wt.% to 9 wt.% or from 3 wt.% to 7 wt.%. In one embodiment, one or more guard beds (not shown) may be used to protect the catalyst from poisons or undesirable impurities contained in the feed or return/recycle streams. Such guard beds may be employed in the vapor or liquid streams. Suitable guard bed materials are known in the art and include, for example, carbon, silica, alumina, ceramic, or resins. In one aspect, the guard bed media is functionalized to trap particular species such as sulfur or halogens. During the hydrogenation process, a crude ethanol product stream is withdrawn, preferably continuously, from reactor 103 via line 112. The crude ethanol product stream may be condensed and fed to flasher 106, which, in turn, provides a vapor stream and a liquid stream. The flasher 106 in one embodiment preferably operates at a temperature of from 50°C to 500°C, e.g., from 70°C to 400°C or from 100°C to 350°C. In one embodiment, the pressure of flasher 106 preferably is from 50 KPa to 2000 KPa, e.g., from 75 KPa to 1500 KPa or from 100 to 1000 KPa. In one preferred embodiment, the temperature and pressure of flasher 106 is similar to the temperature and pressure of reactor 103.

[0057] The vapor stream exiting the flasher 106 may comprise hydrogen and hydrocarbons, which may be purged and/or returned to reaction zone 101 via line 113. As shown in FIG. 1A,

the returned portion of the vapor stream passes through compressor 114 and is combined with the hydrogen feed and co-fed to vaporizer 110.

[0058] The liquid from flasher 106 is withdrawn and pumped as a feed composition via line 115 to the side of first column 107, also referred to as the acid separation column. The contents of line 115 typically will be substantially similar to the product obtained directly from the reactor, and may, in fact, also be characterized as a crude ethanol product. However, the feed composition in line 115 preferably has substantially no hydrogen, carbon dioxide, methane or ethane, which are removed by flasher 106. Exemplary components of liquid in line 115 are provided in Table 2. It should be understood that liquid line 115 may contain other components, not listed, such as components in the feed.

TABLE 2
FEED COMPOSITION

	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
Ethanol	5 to 70	10 to 60	15 to 50
Water	5 to 35	5 to 30	10 to 30
Acetic Acid (Denaturant)	< 90	5 to 80	15 to 70
Ethyl Acetate (Denaturant)	< 20	0.001 to 15	1 to 12
Acetaldehyde (Denaturant)	< 10	0.001 to 3	0.1 to 3
Acetal	< 5	0.001 to 2	0.005 to 1
Acetone	< 5	0.0005 to 0.05	0.001 to 0.03
Other Esters	< 5	< 0.005	< 0.001
Other Ethers	< 5	< 0.005	< 0.001
Other Alcohols	< 5	< 0.005	< 0.001

[0059] The amounts indicated as less than (<) in the tables throughout present application are preferably not present and if present may be present in trace amounts or in amounts greater than 0.0001 wt.%.

[0060] The “other esters” in Table 2 may include, but are not limited to, ethyl propionate, methyl acetate, isopropyl acetate, n-propyl acetate, n-butyl acetate or mixtures thereof. The “other ethers” in Table 2 may include, but are not limited to, diethyl ether, methyl ethyl ether, isobutyl ethyl ether or mixtures thereof. The “other alcohols” in Table 2 may include, but are

not limited to, methanol, isopropanol, n-propanol, n-butanol or mixtures thereof. In one embodiment, the feed composition, e.g., line 115, may advantageously comprise propanol, e.g., isopropanol and/or n-propanol, in small amounts, e.g., from 0.001 wt.% to 0.1 wt.%, from 0.001 wt.% to 0.05 wt.%, or from 0.001 wt.% to 0.03 wt.%. As a result of the low concentration of these alcohols, the resultant denatured ethanol composition advantageously comprises the alcohols, if at all, only in trace amounts (see discussion below). These trace amounts are significantly lower than those levels obtained via methods that do not utilize the hydrogenation of acetic acid. In other embodiments, the concentration of isopropanol in the feed composition is higher, e.g., from 0.01 to 10 wt.%. In other embodiments, the concentration of n-propanol in the feed composition is higher, e.g., from 0.01 to 10 wt.%. In other embodiments, the concentration of diethyl ether in the feed composition is higher, e.g., from 0.01 to 20 wt.%. It should be understood that these other components may be carried through in any of the distillate or residue streams described herein. Further, as indicated above, some of these other components, e.g., isopropanol or diethyl ether, may also be utilized as denaturants.

[0061] When the content of acetic acid in line 115 is less than 5 wt.%, the acid separation column 107 may be skipped and line 115 may be introduced directly to second column 108, also referred to herein as a light ends column.

[0062] In the embodiment shown in FIG. 1A, line 115 is introduced in the lower part of first column 107, e.g., lower half or lower third. In first column 107, unreacted acetic acid, a portion of the water, and other heavy components, if present, are removed from the composition in line 115 and are withdrawn, preferably continuously, as residue. Some or all of the residue may be returned and/or recycled back to reaction zone 101 via line 116. First column 107 also forms an overhead distillate, which is withdrawn in line 117, and which may be condensed and refluxed, for example, at a ratio of from 10:1 to 1:10, e.g., from 3:1 to 1:3 or from 1:2 to 2:1.

[0063] Any of columns 107, 108 or 109 may comprise any distillation column capable of separation and/or purification. The columns preferably comprise tray columns having from 1 to 150 trays, e.g., from 10 to 100 trays, from 20 to 95 trays or from 30 to 75 trays. The trays may be sieve trays, fixed valve trays, movable valve trays, or any other suitable design known in the art. In other embodiments, a packed column may be used. For packed columns, structured packing or random packing may be employed. The trays or packing may be arranged in one

continuous column or they may be arranged in two or more columns such that the vapor from the first section enters the second section while the liquid from the second section enters the first section, etc.

[0064] The associated condensers and liquid separation vessels that may be employed with each of the distillation columns may be of any conventional design and are simplified in FIGS. 1A, 1B, and 1C. As shown in FIGS. 1A, 1B, and 1C, heat may be supplied to the base of each column or to a circulating bottom stream through a heat exchanger or reboiler. Other types of reboilers, such as internal reboilers, may also be used in some embodiments. The heat that is provided to reboilers may be derived from any heat generated during the process that is integrated with the reboilers or from an external source such as another heat generating chemical process or a boiler. Although one reactor and one flasher are shown in FIGS. 1A, 1B, and 1C, additional reactors, flashers, condensers, heating elements, and other components may be used in embodiments of the present invention. As will be recognized by those skilled in the art, various condensers, pumps, compressors, reboilers, drums, valves, connectors, separation vessels, etc., normally employed in carrying out chemical processes may also be combined and employed in the processes of the present invention.

[0065] The temperatures and pressures employed in any of the columns may vary. As a practical matter, pressures from 10 KPa to 3000 KPa will generally be employed in these zones although in some embodiments subatmospheric pressures may be employed as well as superatmospheric pressures. Temperatures within the various zones will normally range between the boiling points of the composition removed as the distillate and the composition removed as the residue. It will be recognized by those skilled in the art that the temperature at a given location in an operating distillation column is dependant on the composition of the material at that location and the pressure of column. In addition, feed rates may vary depending on the size of the production process and, if described, may be generically referred to in terms of feed weight ratios.

[0066] When column 107 is operated under standard atmospheric pressure, the temperature of the residue exiting in line 116 from column 107 preferably is from 95°C to 120°C, e.g., from 105°C to 117°C or from 110°C to 115°C. The temperature of the distillate exiting in line 117 from column 107 preferably is from 70°C to 110°C, e.g., from 75°C to 95°C or from 80°C to

90°C. In other embodiments, the pressure of first column 107 may range from 0.1 KPa to 510 KPa, e.g., from 1 KPa to 475 KPa or from 1 KPa to 375 KPa. Exemplary components of the distillate and residue compositions for first column 107 are provided in Table 3 below. It should also be understood that the distillate and residue may also contain other components, not listed, such as components in the feed. For convenience, the distillate and residue of the first column may also be referred to as the “first distillate” or “first residue.” The distillates or residues of the other columns may also be referred to with similar numeric modifiers (second, third, etc.) in order to distinguish them from one another, but such modifiers should not be construed as requiring any particular separation order.


TABLE 3
FIRST COLUMN

	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
<u>Distillate</u>			
Ethanol	20 to 75	30 to 70	40 to 65
Water	10 to 40	15 to 35	20 to 35
Acetic Acid	< 2	0.001 to 0.5	0.01 to 0.2
Ethyl Acetate	< 60	5.0 to 40	10 to 30
(Denaturant)			
Acetaldehyde	< 10	0.001 to 5	0.01 to 4
(Denaturant)			
Isopropanol	0.02 to 7.5	0.3 to 6.5	1.2 to 5
(Denaturant)			
n-propanol	0.02 to 7.5	0.3 to 6.5	1.2 to 5
(Denaturant)			
Diethyl Ether	0.02 to 7.5	0.3 to 6.5	1.2 to 5
(Denaturant)			
Acetal	< 0.1	< 0.1	< 0.05
Acetone	< 0.05	0.001 to 0.03	0.01 to 0.025
<u>Residue</u>			
Acetic Acid	60 to 100	70 to 95	85 to 92
Water	< 30	1 to 20	1 to 15
Ethanol	< 1	< 0.9	< 0.07

[0067] As shown in Table 3, without being bound by theory, it has surprisingly and unexpectedly been discovered that when any amount of acetal is detected in the feed that is introduced to the acid separation column (first column 107), the acetal appears to decompose in

the column such that less or even no detectable amounts are present in the distillate and/or residue.

[0068] Depending on the reaction conditions, the crude ethanol product exiting reactor 103 in line 112 may comprise ethanol, acetic acid (unconverted), ethyl acetate, and water. After exiting reactor 103, a non-catalyzed equilibrium reaction may occur between the components contained in the crude ethanol product until it is added to flasher 106 and/or first column 107. This equilibrium reaction tends to drive the crude ethanol product to an equilibrium between ethanol/acetic acid and ethyl acetate/water, as shown below.



[0069] In the event the crude ethanol product is temporarily stored, e.g., in a holding tank, prior to being directed to distillation zone 102, extended residence times may be encountered. Generally, the longer the residence time between reaction zone 101 and distillation zone 102, the greater the formation of ethyl acetate. For example, when the residence time between reaction zone 101 and distillation zone 102 is greater than 5 days, significantly more ethyl acetate may form at the expense of ethanol. Thus, shorter residence times between reaction zone 101 and distillation zone 102 are generally preferred in order to maximize the amount of ethanol formed. In one embodiment, a holding tank (not shown), is included between the reaction zone 101 and distillation zone 102 for temporarily storing the liquid component from line 115 for up to 5 days, e.g., up to 1 day, or up to 1 hour. In a preferred embodiment no tank is included and the condensed liquids are fed directly to the first distillation column 107. In addition, the rate at which the non-catalyzed reaction occurs may increase as the temperature of the crude ethanol product, e.g., in line 115, increases. These reaction rates may be particularly problematic at temperatures exceeding 30°C, e.g., exceeding 40°C or exceeding 50°C. Thus, in one embodiment, the temperature of liquid components in line 115 or in the optional holding tank is maintained at a temperature less than 40°C, e.g., less than 30°C or less than 20°C. One or more cooling devices may be used to reduce the temperature of the liquid in line 115.

[0070] As discussed above, a holding tank (not shown) may be included between the reaction zone 101 and distillation zone 102 for temporarily storing the liquid component from line 115, for example from 1 to 24 hours, optionally at a temperature of about 21°C, and corresponding to

an ethyl acetate formation of from 0.01 wt.% to 1.0 wt.% respectively. In addition, the rate at which the non-catalyzed reaction occurs may increase as the temperature of the crude ethanol product is increased. For example, as the temperature of the crude ethanol product in line 115 increases from 4°C to 21°C, the rate of ethyl acetate formation may increase from about 0.01 wt.% per hour to about 0.005 wt.% per hour. Thus, in one embodiment, the temperature of liquid components in line 115 or in the optional holding tank is maintained at a temperature less than 21°C, e.g., less than 4°C or less than -10°C.

[0071] In addition, it has now been discovered that the above-described equilibrium reaction may also favor ethanol formation in the top region of first column 107.

[0072] The distillate, e.g., overhead stream, of first column 107 optionally is condensed and refluxed as shown in FIGS. 1A-C, preferably, at a reflux ratio of 1:5 to 10:1. The distillate in line 117 preferably comprises ethanol; *in situ* denaturant, e.g., ethyl acetate and/or acetaldehyde; water, and other impurities, which may be difficult to separate due to the formation of binary and tertiary azeotropes. The first distillate also comprises a significantly reduced amount of acetic acid. As shown in FIG. 1C, in some embodiments, the distillate of the first column (without further processing) is a denatured ethanol composition comprising from 0.0001 wt.% to 80 wt.% denaturant, e.g., from 0.001 wt.% to 60 wt.%, and from 20 wt.% to 75 wt.% ethanol, e.g., from 30 wt.% to 70 wt.%. Preferably, the denaturant in these embodiments is ethyl acetate. In other embodiments the distillate of the first column (without further processing) is a denatured ethanol composition comprising from 0.0001 wt.% to 10 wt.% denaturant, e.g., from 0.001 wt.% to 5 wt.% or from 0.01 wt.% to 4 wt.%, and from 20 wt.% to 75 wt.% ethanol, e.g., from 30 wt.% to 70 wt.%. Preferably, the denaturant in these embodiments is acetaldehyde.

[0073] In another embodiment, at least a portion of the first distillate may be combined, via optional line 117', with a purified ethanol stream to form a denatured ethanol composition. Preferably, the denaturant comprises ethyl acetate and/or acetaldehyde. In another embodiment, at least a portion of the first distillate may be fed to an additional column, e.g., a third column as discussed below. As a result, the denaturant(s) in the first distillate, e.g., ethyl acetate and/or acetaldehyde, may be carried through to the distillate of the third column. As such, the third distillate may be denatured ethanol composition comprising the denaturant(s) from the first distillate. In these embodiments, the weight percentages of the denaturant(s) in the denatured

ethanol composition may be as previously discussed. The weight ratio of the denaturant-containing stream, e.g., line 117, and the purified ethanol stream vary widely and may be adjusted so as to achieve a particular desired concentration of denaturant in the denatured ethanol composition. For example, the weight ratio of the purified ethanol stream to the denaturant-containing stream may range from 0.01:1 to 5:1, e.g., from 0.05:1 to 3:1.

[0074] As discussed above, the residue from first column 107 comprises an amount of unreacted acetic acid. Thus, in another embodiment, at least a portion of the first residue may be combined with a purified ethanol stream to form an acetic acid-denatured ethanol composition.

[0075] Beneficially, these denatured ethanol compositions are produced utilizing denaturant that is formed *in situ* via the hydrogenation reaction and without additional separation steps. As such, it is not necessary to provide an additional outside source of denaturant or to combine denaturant and purified ethanol, which eliminates a process step, and simplifies the overall process. It is also within the scope of the invention to further purify the first column distillate to remove, for example, additional water and/or acetaldehyde. Conventional separation methods may be used to achieve this additional purification.

[0076] As shown in Table 3, the first residue comprises a significant portion of unreacted acetic acid, which may, in turn, be recycled back to reactor 103, as shown in FIGS. 1A, 1B, and 1C.

[0077] The first distillate in line 117 is introduced to the second column 108, also referred to as the "light ends column," preferably in the middle part of column 108, e.g., middle half or middle third. Second column 108 may be a tray column or packed column. In one embodiment, second column 108 is a tray column having from 5 to 70 trays, e.g., from 15 to 50 trays or from 20 to 45 trays.

[0078] As one example, when a 25 tray column is utilized in a column without water extraction, line 117 is introduced at tray 17. When the second column is not an extractive distillation column, it is expected that the ethyl acetate in line 117 may be separated into the second residue along with the ethanol and water. As a result, in one embodiment, more ethyl acetate may be fed to third column 109 and, thus, this ethyl acetate may be present in the third distillate. In other embodiments, at least a portion of the ethyl acetate-containing second residue may be combined with a purified ethanol stream to form a denatured ethanol composition.

[0079] In preferred embodiments, however, the second column 108 may be an extractive distillation column. In extractive distillation columns, it is expected that the ethyl acetate in line 117 may be separated from the ethanol and water and pass into the second distillate. In such embodiments, an extraction agent, such as water, may be optionally added to second column 108 via line 127. If the extraction agent comprises water, it may be obtained from an external source or from an internal return/recycle line from one or more of the other columns. In a preferred embodiment, the water in the third residue of third column 109 is utilized as the extraction agent. As shown in FIGS 1A, 1B, and 1C, the third residue may be optionally directed to second column 108 via line 121'.

[0080] Although the temperature and pressure of second column 108 may vary, when at atmospheric pressure the temperature of the second residue exiting in line 118 from second column 108 preferably is from 60°C to 90°C, e.g., from 70°C to 90°C or from 80°C to 90°C. The temperature of the second distillate exiting in line 120 from second column 108 preferably is from 50°C to 90°C, e.g., from 60°C to 80°C or from 60°C to 70°C. Column 108 may operate at atmospheric pressure. In other embodiments, the pressure of second column 108 may range from 0.1 KPa to 510 KPa, e.g., from 1 KPa to 475 KPa or from 1 KPa to 375 KPa. Exemplary components for the distillate and residue compositions for second column 108 are provided in Table 4 below. It should be understood that the distillate and residue may also contain other components, not listed, such as components in the feed.

TABLE 4
SECOND COLUMN

	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
<u>Distillate</u>			
Ethyl Acetate (Denaturant)	10 to 90	25 to 90	50 to 90
Acetaldehyde (Denaturant)	1 to 25	1 to 15	1 to 8
Water	1 to 25	1 to 20	4 to 16
Ethanol	< 30	0.001 to 15	0.01 to 5
Acetal	< 5	0.001 to 2	0.01 to 1
<u>Residue</u>			
Water	30 to 70	30 to 60	30 to 50
Ethanol	20 to 75	30 to 70	40 to 70
Ethyl Acetate	< 3	0.001 to 2	0.001 to 0.5
Acetic Acid	< 0.5	0.001 to 0.3	0.001 to 0.2
Isopropanol (Denaturant)	0.01 to 10	0.25 to 8	1.5 to 6.3

[0081] The weight ratio of ethanol in the second residue to ethanol in the second distillate preferably is at least 3:1, e.g., at least 6:1, at least 8:1, at least 10:1 or at least 15:1. The weight ratio of ethyl acetate in the second residue to ethyl acetate in the second distillate preferably is less than 0.4:1, e.g., less than 0.2:1 or less than 0.1:1. In embodiments that use an extractive column with water as an extraction agent as the second column 108, the weight ratio of ethyl acetate in the second residue to ethyl acetate in the second distillate approaches zero. Thus, as shown in Table 4, the second distillate in line 120, which is a derivative stream of the crude ethanol product, comprises a significant amount of separated, *in situ*, denaturant and the second residue in line 118 comprises a significant amount of ethanol. In some embodiments, the second distillate comprises diethyl ether. The diethyl ether may be present in amounts ranging from 0.1 wt.% to 20 wt.%, e.g., 0.1 wt.% to 10 wt.%, from 1 wt.% to 9 wt.%, or from 3 wt.% to 7 wt.%. In these cases, the second distillate may be a denatured ethanol composition having a diethyl ether denaturant. In one embodiment, the second residue in line 118 further comprises isopropanol. The isopropanol may be derived from acetone via the methods discussed above. The acetone, for example, may be formed *in situ* in the hydrogenation and/or the acetone may be added to the hydrogenation reactor as a reactant. Thus, in embodiments where a sufficient

amount of isopropanol, e.g., from 0.1 wt.% to 10 wt.%, from 1 wt.% to 9 wt.%, or from 3 wt.% to 7 wt.%, is present in the second residue, the second residue may be a denatured ethanol composition having an isopropanol denaturant.

[0082] In another embodiment of the invention as shown in FIG. 1A, at least a portion of the second distillate is directed, e.g., via line 120, to the purified ethanol exiting third column 109. In this case, the denatured ethanol composition results from the addition of the *in situ*-formed denaturant to the purified ethanol. Preferably, ethyl acetate denaturant in the second distillate is combined with the purified ethanol obtained from third column 109. In other embodiments, acetaldehyde denaturant in the second distillate is combined with the purified ethanol obtained from third column 109. In other embodiments, at least a portion of the second distillate is fed to third column 109. In these cases, at least a portion of the denaturant in the second distillate, e.g., ethyl acetate and/or acetaldehyde, follows the ethanol through third column 109. Other impurities in the second distillate may be withdrawn in the residue of the third column 109. As a result, the third distillate comprises ethanol along with denaturant from the second column distillate. Denatured ethanol compositions thus formed may have the characteristics and composition of the denatured ethanol compositions discussed herein. The weight ratio of the denaturant-containing stream, e.g., line 120, and the purified ethanol stream vary widely and may be adjusted so as to achieve a particular desired concentration of denaturant in the denatured ethanol composition. For example, when ethyl acetate is the denaturant, the weight ratio of the purified ethanol stream to the denaturant-containing stream may range from 100:1 to 1:1, e.g., from 25:1 to 5:1.

[0083] In another embodiment, at least a portion of the second distillate is recycled to reactor 103 (not shown). As shown, the second residue from the bottom of second column 108, which comprises ethanol and water, is fed via line 118 to third column 109, also referred to as the "product column." More preferably, the second residue in line 118 is introduced in the lower part of third column 109, e.g., lower half or lower third. Third column 109 recovers ethanol, which preferably is substantially pure other than the azeotropic water content, as the distillate in line 119. The distillate of third column 109 preferably is refluxed as shown in FIG. 1A, for example, at a reflux ratio of from 1:10 to 10:1, e.g., from 1:3 to 3:1 or from 1:2 to 2:1. The third residue in line 121, which preferably comprises primarily water, preferably is removed from the

system 100 or may be partially returned to any portion of the system 100. Third column 109 is preferably a tray column as described above and preferably operates at atmospheric pressure. The temperature of the third distillate exiting in line 119 from third column 109 preferably is from 60°C to 110°C, e.g., from 70°C to 100°C or from 75°C to 95°C. The temperature of the third residue exiting from third column 109 preferably is from 70°C to 115°C, e.g., from 80°C to 110°C or from 85°C to 105°C, when the column is operated at atmospheric pressure.

Exemplary components of the distillate, residue, and optional side stream compositions for third column 109 are provided in Table 5 below. As shown in Table 5, the third distillate may comprise significant amounts of isopropanol denaturant. In these cases, the third distillate may be a denatured ethanol composition. It should be understood that the distillate and residue may also contain other components, not listed, such as components in the feed.

[0084] As separation occurs in the third column, the composition of the stream being separated may vary from tray to tray in the third column. In some embodiments, the composition of the stream within the third column, depending upon operating conditions, may contain an increased concentration or build up of alcohols, e.g., mid-boiling alcohols having a boiling point lower than that of water and higher than that of an ethanol/water low-boiling azeotrope. Examples of these alcohols include n-propanol (BP 97.1°C), isopropanol (BP 82.5°C), and 2-butanol (BP 99.5°C). Some of these alcohols were formed *in situ* as a result of the acetic acid hydrogenation. Preferably, these *in situ*-formed mid-boiling alcohols may be utilized as denaturants.

[0085] The mid-boiling point alcohols may be removed using one or more side streams 138 drawn from third column 109. Preferably, side stream 138 is drawn from a middle or an upper section of third column 109, above the feed point of the second residue. Most preferably, side stream 138 is drawn from above the tray 25, e.g., from above tray 30, or from above tray 40. By adjusting the process parameters of third column 109 and withdrawing side stream 138 at the appropriate location, side stream 138 beneficially removes a significant portion of mid-boiling point alcohols, e.g., n-propanol, from the feed in line 118. Side stream 138 preferably comprises from 0.01 wt.% to 10 wt.% n-propanol, e.g., from 0.01 to 5 wt.% or from 0.01 wt.% to 3 wt.%. By withdrawing side stream 138, a significant amount of n-propanol is removed resulting in the purification of the ethanol in the third distillate in line 119. It is within the scope of the invention to select, based on column configuration and operating conditions, an appropriate tray

in a column from which to draw a particular side stream. Also, the contents of side stream 138 may constitute a denatured ethanol composition comprising ethanol and n-propanol. Thus, in this embodiment, a pure ethanol composition may be co-produced with a denatured ethanol composition. In other embodiments, side stream 138 and third distillate are each, independently of one another, denatured ethanol compositions. For example, side stream 130 may comprise an n-propanol-denatured ethanol composition and third distillate 119 may comprise an ethyl acetate-denatured ethanol composition. By performing the separation in this manner, the resultant third distillate 119 beneficially comprises less n-propanol. In other embodiments, at least a portion of withdrawn side stream 138 may be combined with third distillate 119 to form a denatured ethanol composition comprising at least a portion of the *in situ*-formed denaturant from side stream 130.

TABLE 5
THIRD COLUMN

	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
<u>Distillate</u>			
Ethanol	75 to 96	80 to 96	85 to 96
Water	< 12	1 to 9	3 to 8
Acetic Acid	< 1	0.001 to 0.1	0.005 to 0.01
Ethyl Acetate	< 5	0.001 to 4	0.01 to 3
Isopropanol	0.07 to 10	0.8 to 7	2.5 to 7
<u>Residue</u>			
Water	75 to 100	80 to 100	90 to 100
Ethanol	< 0.8	0.001 to 0.5	0.005 to 0.05
Ethyl Acetate	< 1	0.001 to 0.5	0.005 to 0.2
Acetic Acid	< 2	0.001 to 0.5	0.005 to 0.2
<u>Side Stream (Optional)</u>			
Ethanol	0.01 to 10	0.01 to 5	0.01 to 3
n-propanol	0.1 to 10	0.25 to 8	1.5 to 6.3

[0086] Any of the compounds that are carried through the distillation process from the feed or crude reaction product generally remain in the third distillate in amounts of less 0.1 wt.%, based on the total weight of the third distillate composition, e.g., less than 0.05 wt.% or less than 0.02

wt.%. In one embodiment, one or more side streams may remove impurities from any of the columns 107, 108, and/or 109 in system 100. In one embodiment, at least one side stream may be used to remove impurities from the third column 109. The impurities may be purged and/or retained within the system 100.

[0087] The third distillate in line 119 may be further purified to form an anhydrous ethanol product stream, i.e., “finished anhydrous ethanol,” using one or more additional separation systems, such as, for example, distillation columns (e.g., a finishing column) or molecular sieves.

[0088] Returning to second column 108, the distillate in line 120 preferably is refluxed as shown in FIGS. 1A, 1B, and 1C, for example, at a reflux ratio of from 1:10 to 10:1, e.g., from 1:5 to 5:1 or from 1:3 to 3:1. As noted above, the second distillate comprises a significant portion of denaturant, e.g., ethyl acetate and/or acetaldehyde. Accordingly, all or a portion of the second distillate, as shown by line 120, may be directed downstream and may be combined with ethanol that has been further purified, e.g., via third column 109. Also, at least a portion of the distillate from second column 108 may be purged if necessary. In another embodiment, as shown in FIG. 1B, a portion of the second distillate from second column 108 may be recycled to reaction zone 101 via line 120 in order to convert ethyl acetate to additional ethanol, e.g., may be recycled to reactor 103 and co-fed along with acetic acid feed line 105. In another embodiment, the second distillate in line 120 may be further purified to remove other components, such as acetaldehyde, using one or more additional columns (not shown). Such a configuration may be utilized in a case where the desired denaturant consists essentially of ethyl acetate, e.g., Formulae 35 or 35-A of Title 27, Part 21 of the US Code of Federal Regulations (hereinafter abbreviated as 27 C.F.R. Part 21), the entirety of which is incorporated herein by reference. As another option, additional columns (not shown) may be utilized to remove the ethyl acetate and leave acetaldehyde, which may be useful in a situation where the desired denaturant comprises acetaldehyde and does not comprise ethyl acetate.

[0089] System 100 in FIG. 1C is similar to that of FIGS. 1A and 1B, with the addition that the second distillate in line 120 is fed to fourth column 123, also referred to as the “acetaldehyde removal column.” In fourth column 123, the second distillate is separated into a fourth distillate, which comprises acetaldehyde in line 124 and a fourth residue, which comprises ethyl

acetate in line 125. The fourth distillate preferably is refluxed at a reflux ratio of from 1:20 to 20:1, e.g., from 1:10 to 10:1 or from 1:5 to 5:1, and at least a portion of the fourth distillate may be returned to the reaction zone 101 as shown by line 124. For example, the fourth distillate may be combined with the acetic acid feed, added to the vaporizer 110, or added directly to the reactor 103. As shown, the fourth distillate is co-fed with the acetic acid in feed line 105 to vaporizer 110. Without being bound by theory, since acetaldehyde may be hydrogenated to form ethanol, the recycling of a stream that contains acetaldehyde to the reaction zone increases the yield of ethanol and decreases byproduct and waste generation. In another embodiment (not shown in the figure), the acetaldehyde may be collected and utilized, with or without further purification, to make useful products including but not limited to n-butanol, 1,3-butanediol, and/or crotonaldehyde and derivatives. In one preferred embodiment, the acetaldehyde is removed from the second distillate in fourth column 123 such that no detectable amount of acetaldehyde is present in the residue of column 123.

[0090] In preferred embodiments, at least a portion of fourth distillate is combined (not shown) with a purified ethanol stream to form a denatured ethanol composition. Preferably, the denaturant comprises acetaldehyde and/or ethyl acetate. In other embodiments, at least a portion of the fourth distillate may be fed to third column 109. As a result, in these embodiments, the distillate exiting third column 109 may comprise at least a portion of the *in situ*-formed acetaldehyde and/or ethyl acetate that was present in the fourth distillate. In these embodiments, the weight percentages of the acetaldehyde denaturant in the denatured ethanol composition may be as previously discussed. The weight ratio of the purified ethanol stream and the fourth distillate may vary widely and may be adjusted so as to achieve a particular desired concentration of denaturant in the denatured ethanol composition. For example, the weight ratio of the purified ethanol stream to the fourth distillate may range from 2:1 to 75:1, e.g., from 7:1 to 50:1.

[0091] The fourth residue primarily comprises ethyl acetate and ethanol. Preferably, at least a portion of fourth residue is combined with a purified ethanol stream to form a denatured ethanol composition. Preferably, the denaturant comprises ethyl acetate. In other embodiments, at least a portion of the fourth residue may be fed to third column 109. As a result, in these embodiments, the distillate exiting third column 109 may comprise at least a portion of the *in*

situ-formed ethyl acetate that was present in the fourth residue. In these embodiments, the weight percentages of the ethyl acetate denaturant in the denatured ethanol composition may be as previously discussed. The weight ratio of the purified ethanol stream and the fourth residue may vary widely and may be adjusted so as to achieve a particular desired concentration of denaturant in the denatured ethanol composition. For example, the weight ratio of the purified ethanol stream to the fourth residue may range from 1:1 to 50:1, e.g., from 1.75:1 to 20:1. The fourth residue of fourth column 123, in other embodiments, may be purged via line 125.

[0092] Fourth column 123 is preferably a tray column as described above and preferably operates above atmospheric pressure. In one embodiment, the pressure is from 120 KPa to 5,000 KPa, e.g., from 200 KPa to 4,500 KPa, or from 400 KPa to 3,000 KPa. In a preferred embodiment the fourth column 123 may operate at a pressure that is higher than the pressure of the other columns.

[0093] The temperature of the fourth distillate exiting in line 124 from fourth column 123 preferably is from 60°C to 110°C, e.g., from 70°C to 100°C or from 75°C to 95°C. The temperature of the residue exiting from fourth column 125 preferably is from 70°C to 115°C, e.g., from 80°C to 110°C or from 85°C to 110°C. Exemplary components of the distillate and residue compositions for fourth column 123 are provided in Table 6 below. It should be understood that the distillate and residue may also contain other components, not listed, such as components in the feed.

TABLE 6
FOURTH COLUMN

	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
<u>Distillate</u>			
Acetaldehyde	2 to 80	2 to 50	5 to 40
Ethyl Acetate	< 90	30 to 80	40 to 75
Ethanol	< 30	0.001 to 25	0.01 to 20
Water	< 25	0.001 to 20	0.01 to 15
<u>Residue</u>			
Ethyl Acetate	40 to 100	50 to 100	60 to 100
Ethanol	< 40	0.001 to 30	0.01 to 15
Water	< 25	0.001 to 20	2 to 15
Acetaldehyde	< 1	0.001 to 0.5	Not detectable
Acetal	< 3	0.001 to 2	0.01 to 1

[0094] FIG. 1C also shows that the third residue in line 121 may be recycled to second column 108. In one embodiment, recycling the third residue further reduces the aldehyde components in the second residue and concentrates these aldehyde components in the distillate stream 120 and thereby sent to the fourth column 123, wherein the aldehydes may be more easily separated in the fourth column 123. Such embodiments also provide a finished ethanol product that preferably has low amounts of aldehydes and esters.

[0095] In several embodiments, denaturant-containing streams are combined with purified ethanol streams to form denatured ethanol compositions. In other embodiments, these denaturant-containing streams may be fed to third column 109, as opposed to being combined with the distillate of third column 109. In these cases, the denaturants that are fed to column 109 may be separated in the distillate of the third column 109 and, as such may be present in the purified ethanol. Thus, the third distillate may comprise a denatured ethanol composition.

[0096] As noted above, the denatured ethanol composition obtained by the processes of the present invention comprises ethanol and at least one, e.g., at least two or at least three, denaturant(s). The denaturant may be produced *in situ* via the hydrogenation reaction, thus eliminating the need for an outside denaturant source. Preferably, the denaturant comprises ethyl acetate, acetaldehyde, diethyl ether, acetic acid, isopropanol and/or mixtures thereof.

[0097] The denaturant, thus produced, should be present in an effective amount, e.g., in an amount sufficient to provide for a denatured ethanol composition in accordance with appropriate

government regulations. As used herein, the term "denatured ethanol composition" means a composition comprising ethanol and one or more denaturants that is unfit for beverage or internal human medicine, e.g., unpalatable. In other embodiments, the denatured ethanol may comprise a "specifically denatured ethanol," which is an ethanol composition that is denatured pursuant to the formulae authorized under 27 C.F.R. Part 21, Subpart D. In addition, requirements for denatured ethanols are different for different applications, e.g., fuel applications and industrial applications. Thus, some applications may require higher amounts of denaturants while other applications may require lower amounts. A listing of some of these applications is provided in 27 C.F.R. Part 21, the entirety of which is incorporated herein by reference. Table 7 indicates some of the denatured compositions in terms of the amount of denaturant that is added to 100 gallons of ethanol.

TABLE 7**US Denatured Alcohol Formulae According to 27 C.F.R. Part 21**

Formula	Denaturant	Amount (gallons)
Formula 3-C	isopropyl alcohol	5
Formula 13-A	ethyl ether	10
Formula 18*	vinegar 90-grain strength (9% acetic acid in water)	100
Formula 18*	vinegar 60-grain strength (6% acetic acid in water)	150
Formula 29	acetaldehyde	1
Formula 29	alcohol solution containing not less than 20% acetaldehyde	5
Formula 29	ethyl acetate	1
Formula 32	ethyl ether	5
Formula 35	ethyl acetate	29.75
Formula 35	mixture of ethyl acetate with an ester content of not less than 85 percent by weight	35
Formula 35-A	ethyl acetate	4.25
Formula 35-A	mixture of ethyl acetate with an ester content of not less than 85 percent by weight	5

* Ethanol is not less than 160 proof.

[0098] In addition, in other embodiments, the inventive denatured ethanol compositions, as formed, corresponds to the denatured formulae of countries other than the United States. For example, in the United Kingdom, one formula for trade specific denatured alcohol is as follows. With every 979 parts by volume of alcohol (of a strength of not less than 85 percent alcohol by

volume) mix not less than 20 parts by volume of ethyl acetate and 1 part by volume of isopropyl alcohol.

[0099] Another exemplary United Kingdom trade specific denatured alcohol formula is as follows. With every 950 parts by volume of alcohol (of a strength of not less than 85 percent alcohol by volume) mix not less than 50 parts by volume of isopropyl alcohol.

[0100] Of course, this listing of US and international denatured ethanol composition formulae is not exclusive and other formula are certainly within the scope of the invention.

[0101] Preferably, the denatured ethanol composition comprises from 50 wt.% to 99 wt.% ethanol, e.g., from 60 wt.% to 99 wt.% or from 70 wt.% to 95 wt.%, and from 0.01 wt.% to 40 wt.% denaturant, e.g., from 0.01 wt.% to 25 wt.%, from 0.01 wt.% to 20 wt.%, or from 1 wt.% to 15 wt.%, based on the total weight of the denatured ethanol composition.

[0102] In addition to the ethanol and the denaturant, the denatured ethanol composition may also comprise only trace amounts of other impurities such as acetic acid; C₃ alcohols, e.g., n-propanol and isopropanol; and/or C₄-C₅ alcohols.

[0103] In some embodiments, the inventive denatured ethanol composition comprises at least a portion of the first column distillate, as discussed above. Here, the denatured ethanol composition may comprise as the denaturant ethyl acetate and/or acetaldehyde. Exemplary weight percentage ranges for the ethanol and the denaturants (as well as other optional components) are provided in Table 3 above. Preferably, the amount of total denaturant (ethyl acetate and acetaldehyde) in these denatured ethanol compositions ranges from 0.01 wt.% to 90 wt.% denaturant, e.g., from 0.01 wt.% to 65 wt.% or from 0.01 wt.% to 34 wt.%.

[0104] In other embodiments, the denatured ethanol composition is withdrawn from a separation tower in the separation zone. In these cases, the ethanol composition may, for example, comprise an isopropanol denaturant in an amount ranging from 0.1 wt.% to 10 wt.% isopropanol, e.g., from 1 wt.% to 9 wt.% or from 3 wt.% to 7 wt.%.

[0105] In other embodiments, the ethanol composition comprises an ethyl ether, e.g., diethyl ether, denaturant in an amount ranging from 0.1 wt.% to 20 wt.% diethyl ether, e.g., from 0.1 wt.% to 10 wt.%, from 1 wt.% to 9 wt.% or from 3 wt.% to 7 wt.%. In other embodiments, the ethanol composition comprises an acetic acid denaturant in an amount ranging from 0.1 wt.% to 20 wt.% acetic acid, e.g., from 1 wt.% to 15 wt.% or from 2 wt.% to 12 wt.%. In other

embodiments, the ethanol composition comprises an n-propanol denaturant in an amount ranging from 0.001 wt.% to 10 wt.% n-propanol, e.g., from 0.001 wt.% to 0.1 wt.%, from 0.1 wt.% to 10 wt.%, from 1 wt.% to 9 wt.%, or from 3 wt.% to 7 wt.%.

[0106] In preferred embodiments, the denatured ethanol composition is formed by combining a crude ethanol product derivative stream comprising denaturant, e.g., the second distillate, and a purified ethanol stream. Exemplary weight percentage ranges for the ethanol and the denaturants, e.g., ethyl acetate and/or acetaldehyde, (as well as other optional components) are provided in Table 8. In some embodiments, the ethanol composition comprises an ethyl acetate denaturant in an amount ranging from 0.01 wt.% to 40 wt.% ethyl acetate, e.g., from 0.01 wt.% to 15 wt.%, from 0.01 wt.% to 10 wt.% or from 0.01 wt.% to 9 wt.%. In other embodiments, the ethanol composition comprises an acetaldehyde denaturant in an amount ranging from 0.01 wt.% to 10 wt.% acetaldehyde, e.g., from 0.01 wt.% to 5 wt.%, from 0.01 wt.% to 2 wt.% or from 0.01 wt.% to 1 wt.%. Preferably, the amount of total denaturant in these denatured ethanol compositions ranges from 0.01 wt.% to 20 wt.% denaturant, e.g., from 0.01 wt.% to 12 wt.% or from 0.01 wt.% to 10 wt.%.

TABLE 8
DENATURED ETHANOL COMPOSITIONS

Component	Conc. (wt.%)	Conc. (wt.%)	Conc. (wt.%)
Ethanol	50 to 99	60 to 99	70 to 95
Water	0.0001 to 1	0.001 to 0.1	0.001 to 0.05
Acetic Acid	1 to 20	3 to 15	5 to 10.5
Ethyl Acetate (Denaturant)	< 15	< 10	< 9
Acetaldehyde (Denaturant)	< 10	< 5	< 3
Isopropanol (Denaturant)	0.05 to 10	0.6 to 9	2 to 6.7
Diethyl Ether (Denaturant)	0.05 to 10	0.6 to 9	2 to 6.7
N-propanol (Denaturant)	0.05 to 10	0.6 to 9	2 to 6.7
Acetal	< 0.05	< 0.01	< 0.005
Acetone	< 0.05	< 0.01	< 0.005

[0107] Although the exemplary weight percentages of water in the embodiments of Table 8 range from 0.0001 wt.% to 1 wt.%, in other embodiments, water may be present in the denatured ethanol composition in greater amounts. For example, the denatured ethanol composition may comprise water in an amount ranging from 0.1 wt.% to 8 wt.% water, e.g., from 0.1 wt.% to 5 wt.% or from 0.1 wt.% to 2 wt.%.

[0108] The denatured ethanol compositions of the embodiments of the present invention may be suitable for use in a variety of applications including fuels, solvents, chemical feedstocks, pharmaceutical products, cleansers, sanitizers, or hydrogenation transport. In fuel applications, the denatured ethanol composition may be blended with gasoline for motor vehicles such as automobiles, boats and small piston engine aircrafts. In non-fuel applications, the denatured ethanol composition may be used as a solvent for toiletry and cosmetic preparations, detergents, disinfectants, coatings, inks, and pharmaceuticals. The denatured ethanol composition may also be used as a processing solvent, e.g., in manufacturing processes for medicinal products, food preparations, dyes, photochemicals and latex processing.

[0109] The denatured ethanol composition may also be used as a chemical feedstock to make other chemicals such as vinegar, ethyl acrylate, ethyl acetate, ethylene, glycol ethers,

ethylamines, aldehydes, and higher alcohols, especially butanol. The denatured ethanol composition may be suitable for use as a feed stock in esters production. Preferably, in the production of ethyl acetate, the denatured ethanol composition may be esterified with acetic acid or reacted with polyvinyl acetate. The denatured ethanol composition may be dehydrated to produce ethylene. Any of known dehydration catalysts can be employed in to dehydrate ethanol, such as those described in U.S. Pub. Nos. 2010/0030001 and 2010/0030002, the entire contents and disclosures of which are hereby incorporated by reference. A zeolite catalyst, for example, may be employed as the dehydration catalyst. Preferably, the zeolite has a pore diameter of at least about 0.6 nm, and preferred zeolites include dehydration catalysts selected from the group consisting of mordenites, ZSM-5, a zeolite X and a zeolite Y. Zeolite X is described, for example, in U.S. Pat. No. 2,882,244 and zeolite Y in U.S. Pat. No. 3,130,007, the entireties of which are hereby incorporated by reference.

[0110] In order that the invention disclosed herein may be more efficiently understood, some non-limiting examples are provided below. The following examples describe various embodiments of the inventive ethanol composition.

Examples

Example 1

[0111] A crude ethanol product comprising ethanol, acetic acid, water, and ethyl acetate was produced by reacting a vaporized feed comprising 95.2 wt.% acetic acid and 4.6 wt.% water with hydrogen in the presence of a catalyst comprising 1.6 wt.% platinum and 1 wt.% tin supported on 1/8 inch calcium silicate modified silica extrudates at an average temperature of 291°C, an outlet pressure of 2,063 KPa. Unreacted hydrogen was recycled back to the inlet of the reactor such that the total hydrogen/acetic acid molar ratio was 5.8 at a GHSV of 3,893 hr⁻¹. Under these conditions, 42.8% of the acetic acid was converted, and the selectivity to ethanol was 87.1%, selectivity to ethyl acetate was 8.4%, and selectivity to acetaldehyde was 3.5%. The crude ethanol mixture was purified using a separation scheme having distillation columns as shown in FIG. 1A.

[0112] The crude ethanol product was fed to the first column at a feed rate of 20 g/min. The composition of the liquid feed is provided in Table 8. The first column was a 2 inch diameter Oldershaw with 50 trays. The column was operated at a temperature of 115°C at atmospheric

pressure. Unless otherwise indicated, a column operating temperature is the temperature of the liquid in the reboiler and the pressure at the top of the column is atmospheric (approximately one atmosphere). The column differential pressure between the trays in the first column was 7.4 KPa. The first residue was withdrawn at a flow rate of 12.4 g/min and returned to the hydrogenation reactor.

[0113] The first distillate was condensed and refluxed at a 1:1 ratio at the top of the first column, and a portion of the distillate was introduced to the second column at a feed rate of 7.6 g/min. The second column was a 2 inch diameter Oldershaw design equipped with 25 trays. The second column was operated at a temperature of 82°C at atmospheric pressure. In this embodiment, an extractive agent was not utilized. The column differential pressure between the trays in the second column was 2.6 KPa. The second residue was withdrawn at a flow rate of 5.8 g/min and directed to the third column. The second distillate was refluxed at a ratio of 4.5:0.5 and the remaining distillate was collected for analysis. The compositions of the feed, distillates, and residues are provided in Table 9.

TABLE 9					
Component	First Column			Second Column	
	Feed (wt.%)	Distillate (wt.%)	Residue (wt.%)	Distillate (wt.%)	Residue (wt.%)
Water	13.8	24.7	5.6	5.1	30.8
Acetaldehyde	--	1.8	--	8.3	--
Acetic Acid	55.0	0.08	93.8	0.03	0.1
Ethanol	23.4	57.6	0.06	12.4	67.6
Ethyl Acetate	6.5	15.1	--	76.0	--
Acetal	0.7	0.1	--	0.006	0.03
Acetone	--	0.01	--	0.03	--

[0114] As shown in Table 9, the first column distillate is a denatured ethanol composition, which comprises ethanol and a significant portion of *in situ*-formed denaturant.

[0115] Residue from the second column was collected from several runs and introduced (above tray 25) to the third column, a 2 inch Oldershaw containing 60 trays, at a rate of 10 g/min. The third column was operated at a temperature of 103°C at atmospheric pressure. The column differential pressure between the trays in the third column was 6.2 KPa. The third residue was withdrawn at a flow rate of 2.7 g/min. The third distillate was condensed and

refluxed at a 3:1 ratio at the top of the third column. The composition of the recovered ethanol composition is shown in Table 10. The ethanol composition comprises ethanol and a significant portion of *in situ*-formed ethyl acetate. This denatured ethanol composition was, surprisingly and unexpectedly, a denatured ethanol composition that was prepared without the addition of outside denaturant. The ethanol composition also contained 10 ppm of n-butyl acetate.

TABLE 10

Component	Feed (wt.%)	Third Column	
		Distillate (wt.%)	Residue (wt.%)
Acetic Acid	0.098	0.001	0.4
Ethanol	65.7	93.8	0.004
Water	35.5	6.84	98
Ethyl Acetate	1.37	1.8	--
Acetal	0.02	0.03	--
Isopropanol	0.004	0.005	--
n-propanol	0.01	0	--

Example 2

[0116] A crude ethanol product comprising ethanol, acetic acid, water and ethyl acetate was produced by reacting a vaporized feed comprising 96.3 wt.% acetic acid and 4.3 wt.% water with hydrogen in the presence of a catalyst comprising 1.6 wt.% platinum and 1% tin supported on 1/8 inch calcium silicate modified silica extrudates at an average temperature of 290°C, an outlet pressure of 2,049 KPa. Unreacted hydrogen was recycled back to the inlet of the reactor such that the total hydrogen/acetic acid molar ratio was 10.2 at a GHSV of 1,997 hr⁻¹. Under these conditions, 74.5% of the acetic acid was converted, and the selectivity to ethanol was 87.9%, selectivity to ethyl acetate was 9.5%, and selectivity to acetaldehyde was 1.8%. The crude ethanol mixture was purified using a separation scheme having distillation columns as shown in FIG. 1A.

[0117] The crude ethanol product was fed to the first column at a feed rate of 20 g/min. The composition of the liquid feed is provided in Table 11. The first column is a 2 inch diameter Oldershaw with 50 trays. The column was operated at a temperature of 116 °C at atmospheric pressure. The column differential pressure between the trays in the first column was 8.1 KPa.

The first residue was withdrawn at a flow rate of 10.7 g/min and returned to the hydrogenation reactor.

[0118] The first distillate was condensed and refluxed at a 1:1 ratio at the top of the first column, and a portion of the distillate was introduced to the second column at a feed rate of 9.2 g/min. The second column is a 2 inch diameter Oldershaw design equipped with 25 trays. The second column was operated at a temperature of 82°C at atmospheric pressure. The column differential pressure between the trays in the second column was 2.4 KPa. The second residue was withdrawn at a flow rate of 7.1 g/min and directed to the third column. The second distillate was refluxed at a ratio of 4.5:0.5 and the remaining distillate was collected for analysis. The compositions of the feed, distillates, and residues are provided in Table 11.

Component	TABLE 11				
	First Column			Second Column	
	Feed (wt.%)	Distillate (wt.%)	Residue (wt.%)	Distillate (wt.%)	Residue (wt.%)
Water	14.6	27.2	3.7	3.0	36.2
Acetaldehyde	--	1.5	--	10.3	--
Acetic Acid	49.1	0.2	98.2	0.04	0.3
Ethanol	27.6	54.5	0.04	13.3	64.4
Ethyl Acetate	7.9	15.2	--	75.7	1.8
Acetal	0.7	0.1	--	0.01	0.02
Acetone	--	0.01	--	0.03	--

[0119] As shown in Table 11, the first column distillate is a denatured ethanol composition, which comprises ethanol and a significant portion of *in situ*-formed denaturant.

Example 3

[0120] A crude ethanol product comprising ethanol, isopropanol, acetic acid, water, and ethyl acetate was produced by reacting a vaporized feed comprising 98 wt.% acetic acid and 2 wt.% acetone with hydrogen in the presence of a catalyst comprising 1.6 wt.% platinum and 1 wt.% tin supported on 1/8 inch calcium silicate modified silica extrudates at an average temperature of 291°C, an outlet pressure of 1,420 KPa. The catalyst was diluted at a volume ratio of 1:1 with 3mm glass beads. Under these conditions, the acetone conversion was 68% and, after separation, the resulting ethanol/isopropanol mixture comprised 4.3 wt.% isopropanol.

[0121] The composition of the resultant crude ethanol composition is provided in Table 12.

TABLE 12	
Component	wt.%
Ethanol	30.7
Acetaldehyde	0.3
Acetone	0.6
Isopropanol	1.3
Ethyl Acetate	3.4
Acetic Acid	50.9
Acetal	0.5

[0122] As shown in Table 12, the addition of acetone to the acetic acid feed provides for isopropanol product when the acetic acid feed is hydrogenated. The crude ethanol product formed from the hydrogenation provides for a denatured ethanol composition comprising the ethanol and 4.3 wt.% of the *in situ*-formed isopropanol.

[0123] In other embodiments, the denatured ethanol composition is formed by combining a crude ethanol product derivative stream comprising denaturant and a purified ethanol stream. As such, denaturants from the derivative stream are combined with the purified ethanol stream.

Example 4

[0124] A crude ethanol product comprising ethanol, acetic acid, acetaldehyde, water, and ethyl acetate was prepared via acetic acid hydrogenation as discussed above. The crude ethanol product was purified using a separation scheme having distillation columns as shown in FIG. 1A. The second column was operated as an extractive distillation column with a water extraction agent.

[0125] The compositions of the distillate exiting the second column and the distillate exiting the third column are provided in Table 13.

TABLE 13		
Component	Second Distillate (wt.%)	Third Distillate (wt.%)
Ethanol	12.4	93.8
Ethyl Acetate	76	1.8
Acetaldehyde	8.3	0
Acetic Acid	0.03	0.001
Isopropanol	0	0.005
N-propanol	0	0
Acetone	0.03	0
Acetal	0.006	0.03
Water	5.1	6.8

[0126] The second distillate and the third distillate of Table 13, when combined at a weight ratio of 1.6:1 and 21:1, respectively, provides for a denatured ethanol compositions as shown in Table 14.

TABLE 14		
	1.6:1	21:1
	Weight Ratio	Weight Ratio
Component	wt. %	wt. %
Ethanol	61	88
Ethyl Acetate	30	5
Acetaldehyde	3	0.4
Acetic Acid	0.01	0.002
Isopropanol	0.003	0.005
N-propanol	0	0
Acetone	0.01	0.001
Acetal	0.02	0.03
Water	6	7

Example 5

[0127] A crude ethanol product comprising ethanol, acetic acid, acetaldehyde, water, and ethyl acetate was prepared via acetic acid hydrogenation as discussed above. The crude ethanol

product was purified using a separation scheme having distillation columns as shown in FIG. 1C.

[0128] The compositions of the residue exiting the fourth column and the distillate exiting the third column are provided in Table 15.

TABLE 15		
Component	Fourth Residue (wt.%)	Third Distillate (wt.%)
Ethanol	14.3	93.8
Ethyl Acetate	80.5	1.8
Acetaldehyde	--	0
Acetic Acid	0.03	0.001
Isopropanol	--	0.005
N-propanol	--	0
Acetone	0.01	0
Acetal	0.017	0.03
Water	4.7	6.8

[0129] The third distillate and the fourth residue of Table 15, when combined at a weight ratio of 1.75:1 and 20:1, respectively, provides for a denatured ethanol composition as shown in Table 16.

TABLE 16		
	1.75:1	20:1
	Weight Ratio	Weight Ratio
Component	wt.%	wt.%
Ethanol	64	88
Ethyl Acetate	30	5
Acetaldehyde	0	0
Acetic Acid	0.01	0.002
Isopropanol	0.003	0.005
N-propanol	0	0
Acetone	0	0.0005
Acetal	0.02	0.03
Water	6	7

Example 6

[0130] A crude ethanol product comprising ethanol, acetic acid, acetaldehyde, water, and ethyl acetate was prepared via acetic acid hydrogenation as discussed above. The crude ethanol product was purified using a separation scheme having distillation columns as shown in FIG. 1C.

[0131] The compositions of the distillate exiting the fourth column and the distillate exiting the third column are provided in Table 17.

TABLE 17		
Component	Fourth Distillate (wt.%)	Third Distillate (wt.%)
Ethanol	5.4	93.8
Ethyl Acetate	39.8	1.8
Acetaldehyde	61.5	0
Acetic Acid	0.02	0.001
Isopropanol	--	0.005
N-propanol	--	0
Acetone	0.08	0
Acetal	0.001	0.03
Water	2.1	6.8

[0132] The third distillate and the fourth distillate of Table 17, when combined at a weight ratio of 7:1 and 50:1, respectively, provides for a denatured ethanol compositions as shown in Table 18.

TABLE 18

Component	7:1	50:1
	Weight Ratio	Weight Ratio
	wt. %	wt. %
Ethanol	80	90
Ethyl Acetate	6	2
Acetaldehyde	7	1
Acetic Acid	0	0.001
Isopropanol	0.004	0.005
N-propanol	0	0
Acetone	0.01	0.0015
Acetal	0.03	0.03
Water	6	7

Example 7

[0133] A crude ethanol product comprising ethanol, acetic acid, acetaldehyde, water, and ethyl acetate was prepared via acetic acid hydrogenation as discussed above. The crude ethanol product was purified using a separation scheme having distillation columns as shown in FIG. 1A.

[0134] The compositions of the distillate exiting the first column and the distillate exiting the third column are provided in Table 19.

TABLE 19

Component	First Distillate (wt. %)	Third Distillate (wt. %)
Ethanol	57.6	93.8
Ethyl Acetate	15.1	1.8
Acetaldehyde	1.8	0
Acetic Acid	0.08	0.001
Isopropanol	--	0.005
N-propanol	--	0
Acetone	0.01	0
Acetal	0.1	0.03
Water	24.7	6.8

[0135] The third distillate and the first distillate of Table 19, when combined at a weight ratio of 0.05:1 and 3:1, respectively, provides for a denatured ethanol compositions as shown in Table 20.

TABLE 20		
	0.05:1	3:1
	Weight Ratio	Weight Ratio
Component	wt. %	wt. %
Ethanol	60	83
Ethyl Acetate	15	5
Acetaldehyde	2	0
Acetic Acid	0.08	0.02
Isopropanol	0	0.004
N-propanol	0	0
Acetone	0.01	0.0025
Acetal	0.1	0.05
Water	24	11

Example 8

[0136] A crude ethanol product comprising ethanol, acetic acid, acetaldehyde, water, and ethyl acetate was prepared via acetic acid hydrogenation as discussed above. The crude ethanol product may be purified using a first column. In this separation scheme, however, the first distillate may be conveyed directly to the third column, thus bypassing the second and/or fourth columns. The third column may provide a residue and a distillate. The compositions of the first distillate and the third distillate is provided in Table 24. The third distillate is a denatured ethanol composition that may be advantageously prepared without the need for a second column or a fourth column.

TABLE 24		
Component	First Distillate (wt.%)	Third Distillate (wt.%)
Ethanol	57.6	77
Ethyl Acetate	15.1	20
Acetaldehyde	1.8	2
Acetic Acid	0.08	0
Isopropanol	--	0
N-propanol	--	0
Acetone	0.01	0.01
Acetal	0.1	0.13
Water	24.7	0

Example 9

[0137] A crude ethanol product comprising ethanol, acetic acid, acetaldehyde, water, and ethyl acetate was prepared via acetic acid hydrogenation as discussed above. The crude ethanol product was purified using a separation scheme having, *inter alia*, first and second distillation columns as shown in FIG. 1A.

[0138] Residue from the second column was collected from several runs and introduced to the third column, a 2 inch Oldershaw containing 50 trays, at a rate of 18 g/min. The third column was operated at a temperature of 102°C at atmospheric pressure. The column differential pressure between the trays in the third column was 6.2 KPa. The third residue was withdrawn at a flow rate of 13 g/min. The third distillate was condensed and refluxed at a 3:2 ratio at the top of the third column.

[0139] The composition of some components in the second residue stream at various tray positions within the third column is shown in FIG. 2. Ethanol is also present in a significant amount at each tray.

[0140] As shown in FIG. 2, a side stream may be withdrawn from the third column. Preferably, the withdrawn side stream comprises ethanol and n-propanol. The side stream withdrawn from the third column provides a denatured ethanol composition comprising ethanol and n-propanol. In some embodiments, the side stream may be combined with a purified ethanol stream, e.g., the third distillate, to form a separate denatured ethanol composition. Each of these denatured ethanol compositions, surprisingly and unexpectedly, may be prepared without the addition of outside denaturant.

[0141] In the sample of FIG. 2, the side stream may be withdrawn at from tray 22 to 52, e.g., from tray 25 to tray 43; from tray 25 to tray 40; or from tray 26 to tray 39. The sample of FIG. 2 is, however, merely exemplary. It is within the scope of the invention to adjust the position from which the side stream is withdrawn, based on process parameters, to achieve a desired side stream composition.

[0142] While the invention has been described in detail, modifications within the spirit and scope of the invention will be readily apparent to those of skill in the art. In view of the foregoing discussion, relevant knowledge in the art and references discussed above in connection with the Background and Detailed Description, the disclosures of which are all incorporated herein by reference. In addition, it should be understood that aspects of the invention and portions of various embodiments and various features recited below and/or in the appended claims may be combined or interchanged either in whole or in part. In the foregoing descriptions of the various embodiments, those embodiments which refer to another embodiment may be appropriately combined with other embodiments as will be appreciated by one of skill in the art. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention.

We claim:

1. A process for producing a denatured ethanol composition, the process comprising:
hydrogenating an acetic acid feed in the presence of a catalyst to form a crude ethanol product comprising ethanol and at least one denaturant;
separating the crude ethanol product in one or more separation units into a denatured ethanol composition and one or more derivative streams, wherein the denatured ethanol composition comprises from 0.01 wt.% to 40 wt % denaturant, based on the total weight of the denatured ethanol composition.
2. The process of claim 1, wherein the at least one denaturant is selected from the group consisting of acetaldehyde, acetaldol, ethyl ether, and methanol.
3. The process as in any one of claims 1 and 2, wherein the at least one denaturant comprises ethyl acetate.
4. The process as in one of claims 1-3, wherein the at least one denaturant comprises acetaldehyde.
5. The process as in one of claims 1-3, wherein the at least one denaturant comprises isopropanol.
6. The process as in one of claims 1-3, wherein the at least one denaturant comprises diethyl ether.
7. The process as in one of claims 1-3, wherein the at least one denaturant comprises acetic acid.
8. The process as in one of claims 1-3, wherein the denatured ethanol composition comprises from 50 wt.% to 99 wt.% ethanol.

9. The process as in one of claims 1-8, wherein the acetic acid feed comprises acetic acid and propionic acid.
10. The process of claim 9, wherein the propionic acid is hydrogenated to produce n-propanol.
11. The process of claim 10, further comprising:
 - separating, in a first column, at least a portion of the crude ethanol product into a first distillate comprising ethanol and n-propanol, and a first residue comprising acetic acid;
 - separating, in a second column, at least a portion of the first distillate into a second distillate and a second residue comprising ethanol, at least a portion of the n-propanol, and water; and
 - separating, in a third column, at least a portion of the second residue into a third distillate comprising ethanol and a third residue comprising water.
12. The process of claim 11, further comprising:
 - withdrawing, from the third column, a side stream comprising n-propanol.
13. The process as in one of claims 1-12, wherein the crude ethanol product further comprises:
 - from 0.01 wt.% to 20 wt.% ethyl acetate;
 - from 0.01 wt.% to 10 wt.% acetaldehyde;
 - from 0.01 wt.% to 10 wt.% isopropanol;
 - from 0.01 wt.% to 20 wt.% diethyl ether;
 - from 0 wt.% to 90 wt.% acetic acid; and
 - from 5 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
14. The process as in one of claims 1-13, wherein the acetic acid feed comprises acetic acid and acetone, and the at least one denaturant comprises isopropanol.

15. The process as in one of claims 1-14, further comprising contacting acetic acid and hydrogen, in an auxiliary reactor, under conditions effective to form the acetone.
16. The process as in one of claims 1-14, wherein the denatured ethanol composition, as formed, comprises from 0.1 wt.% to 10 wt % isopropanol, based on the total weight of the denatured ethanol composition.
17. The process as in one of claims 1-16, wherein the separating comprises:
 - separating a first portion of the crude ethanol product into an ethanol stream and the one or more derivative streams;
 - purifying the ethanol stream to form a purified ethanol stream; and
 - combining a second portion of the crude ethanol product with the purified ethanol stream to form the denatured ethanol composition.
18. The process as in one of claims 1-17, wherein the separating comprises:
 - separating at least a portion of the crude ethanol product into an ethanol stream and the one or more derivative stream;
 - purifying the ethanol stream to form a purified ethanol stream; and
 - combining at least a portion of the acetic acid feed with the purified ethanol stream to form the denatured ethanol composition.
19. The process as in one of claims 1-18, further comprising:
 - separating, in a first column, at least a portion of the crude ethanol product into a first distillate comprising ethanol, acetaldehyde, and ethyl acetate, and a first residue comprising acetic acid.
20. The process as in one of claims 1-19, further comprising:
 - separating at least a portion of the first distillate into an ethanol stream and a denaturant stream comprising acetaldehyde and ethyl acetate;

purifying the ethanol stream to form a purified ethanol stream; and
combining at least a portion of the denaturant stream and the purified ethanol stream to form the denatured ethanol composition.

21. The process as in one of claims 1-19, further comprising:
separating at least a portion of the first distillate into an ethanol stream;
purifying the ethanol stream to form a purified ethanol stream; and
combining at least a portion of the first residue and the purified ethanol stream to form the denatured ethanol composition.
22. The process as in one of claims 1-19, further comprising:
separating, in a second column, at least a portion of the first distillate into a second distillate comprising ethyl acetate and/or acetaldehyde, and an ethanol stream;
purifying the ethanol stream to form a purified ethanol stream; and
combining at least a portion of the second distillate and the purified ethanol stream to form the denatured ethanol composition.
23. The process of claim 22, wherein the second column is an extractive distillation column.
24. The process as in one of claims 1-19, further comprising:
separating, in a second column, at least a portion of the first distillate into a second residue comprising ethyl acetate, and an ethanol stream;
purifying the ethanol stream to form a purified ethanol stream; and
combining at least a portion of the second residue and the purified ethanol stream to form the denatured ethanol composition.
25. The process of claim 24, wherein the second column is a non-extractive distillation column.

26. The process as in one of claims 1-19, further comprising:
separating, in a second column, at least a portion of the first distillate into a second residue comprising ethyl acetate, and an ethanol stream;
separating, in a third column, at least a portion of the second residue into a third distillate comprising ethyl acetate and ethanol.
27. The process as in one of claims 1-26, wherein the denaturant comprises ethyl acetate, and wherein the denatured ethanol composition further comprises:
from 0.01 wt.% to 40 wt.% ethyl acetate;
from 50 wt.% to 99 wt.% ethanol; and
from 1 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
28. The process as in one of claims 1-26, wherein the denaturant comprises acetaldehyde, and wherein the denatured ethanol composition further comprises:
from 0.01 wt.% to 10 wt.% acetaldehyde;
from 50 wt.% to 99 wt.% ethanol; and
from 1 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
29. The process as in one of claims 1-26, wherein the denaturant comprises isopropanol, and wherein the denatured ethanol composition further comprises:
from 0.1 wt.% to 10 wt.% isopropanol;
from 50 wt.% to 99 wt.% ethanol; and
from 1 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
30. The process as in one of claims 1-26, wherein the denaturant comprises diethyl ether, and wherein the denatured ethanol composition further comprises:
from 0.1 wt.% to 20 wt.% diethyl ether;
from 50 wt.% to 99 wt.% ethanol; and
from 1 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.

31. The process as in one of claims 1-26, wherein the denaturant comprises acetic acid, and wherein the denatured ethanol composition further comprises:
- from 0.01 wt.% to 20 wt.% acetic acid
 - from 50 wt.% to 99 wt.% ethanol; and
 - from 1 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
32. The process as in one of claims 1-26, wherein the denaturant comprises n-propanol, and wherein the denatured ethanol composition further comprises:
- from 0.1 wt.% to 10 wt.% n-propanol
 - from 50 wt.% to 99 wt.% ethanol; and
 - from 1 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
33. A denatured ethanol composition formed by the process as in one of claims 1-32.
34. A fuel composition comprising the denatured ethanol composition of claim 33.
35. A feed stock for ester production comprising the denatured ethanol composition of claim 33.
36. A solvent comprising the denatured ethanol composition of claim 33.
37. A process for producing a denatured ethanol composition, the process comprising:
- hydrogenating an acetic acid feed in the presence of a catalyst to form a crude ethanol product comprising ethanol and a denaturant;
 - separating the crude ethanol product into an ethanol stream and at least one derivative stream comprising denaturant;
 - further purifying the ethanol stream to form a purified ethanol stream; and
 - combining at least a portion of the at least one derivative stream with the purified ethanol stream to produce the denatured ethanol composition.

38. The process of claim 37, wherein the denatured ethanol composition comprises from 50 to 99 wt.% ethanol, and from 0.01 to 40 wt.% denaturant.
39. The process of claim 37, wherein the crude ethanol product comprises
from 5 wt.% to 70 wt.% ethanol;
from 0.01 wt.% to 10 wt.% acetaldehyde;
from 0.01 wt.% to 10 wt.% isopropanol;
from 0.01 wt.% to 20 wt.% diethyl ether;
from 0.01 wt.% to 20 wt.% ethyl acetate;
from 0 wt.% to 90 wt.% acetic acid; and
from 5 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
40. The process as in one of claims 37-39, wherein the denaturant is selected from the group consisting of acetaldehyde, acetaldol, ethyl ether, and methanol.
41. The process as in one of claims 37-40, wherein the denaturant is ethyl acetate.
42. The process as in one of claims 37-41, further comprising
separating, in a first column, at least a portion of the crude ethanol product into a first distillate comprising ethanol and denaturant, and a first residue comprising acetic acid;
separating, in a second column, at least a portion of the first distillate into a second distillate comprising denaturant and a second residue comprising the ethanol stream; and
separating, in a third column, at least a portion of the ethanol stream into a third distillate comprising the purified ethanol stream and a third residue comprising water.
43. The process of claim 42, further comprising adding at least a portion of the second distillate to at least a portion of the purified ethanol stream to produce the denatured ethanol composition.
44. A process for producing a denatured ethanol composition, the process comprising:

hydrogenating an acetic acid feed comprising acetic acid and acetone in the presence of a catalyst to form a crude ethanol product comprising ethanol and isopropanol;

separating the crude ethanol product in one or more separation units into a denatured ethanol composition and one or more derivative streams, wherein the denatured ethanol composition, as formed, comprises ethanol and from 0.1 wt.% to 10 wt.% isopropanol, based on the total weight of the denatured ethanol composition.

45. The process of claim 44, wherein the crude ethanol product comprises
from 5 wt.% to 70 wt.% ethanol;
from 0.01 wt.% to 10 wt.% acetaldehyde;
from 0.01 wt.% to 10 wt.% isopropanol;
from 0 wt.% to 20 wt.% ethyl acetate; and
from 5 wt.% to 35 wt.% water, based on the total weight of the crude ethanol product.
46. A denatured ethanol composition formed by the process as in one of claims 37-45.