



(51) International Patent Classification:
B29D 11/00 (2006.01) *B65G 51/01* (2006.01)

(21) International Application Number:
PCT/EP2010/065449

(22) International Filing Date:
14 October 2010 (14.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/252,476 16 October 2009 (16.10.2009) US

(71) Applicant (for all designated States except US): **NO-VARTIS AG** [CH/CH]; Lichtstrasse 35, CH-4056 Basel (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BIEL, Roger** [DE/DE]; Beethovenstrasse 4a, 63743 Aschaffenburg (DE).
HARTERT, Carolin [DE/DE]; Mühlstrasse 57, 63768 Hösbach (DE).

(74) Agent: **BOHEST AG**; P.O. Box 160, CH-4003 Basel (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR REMOVING A CONTACT LENS FROM A CONTAINER

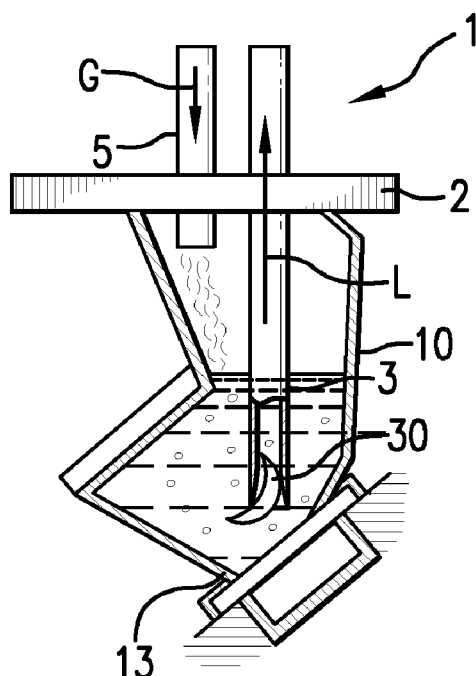


FIG. 4

(57) Abstract: There is described a method for the removal of a contact lens (30) from a container (10), with a contact lens (30) being immersed in a liquid (20) which is held in a container (10), and the contact lens (30) being removed from the container (10) together with at least a portion of the liquid (20) through a removal tube (3) which is dipped into the liquid (20) within the container (10). First the container (10) containing the liquid (20) and the immersed contact lens (30) is closed pressure-tight with a lid (2), which comprises the removal tube (3) and a pressure tube (5). Both, the removal tube (3) and the pressure tube (5), are guided through the lid (2). After the closing of the container (10) with the lid (2) an overpressure is applied to the interior of the closed container (10) through the pressure tube (5). The overpressure is applied such that the contact lens (30) and the liquid (20) are pressed into the removal tube (3) and removed together therethrough. There is also described a device (1) for carrying out the method.



Published:

— *with international search report (Art. 21(3))*