

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number
WO 2004/028301 A1

(51) International Patent Classification⁷: **A47B 88/04**,
67/04

(21) International Application Number:
PCT/NL2003/000655

(22) International Filing Date:
24 September 2003 (24.09.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1021522 24 September 2002 (24.09.2002) NL

(71) Applicant (*for all designated States except US*):
DRIESSEN AIRCRAFT HOLDING B.V. [NL/NL];
P.O. Box 28, NL-1770 AA Wieringerwerf (NL).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **VAN LOON, Lau-**
rentius, Petrus, Joseph [NL/NL]; Langeweg 85, NL-1774
AK Slootdorp (NL). **ORTEGIES, Cornelis, Petrus,**
Maria [NL/NL]; Harn 29, NL-1679 VD Midwoud (NL).

(74) Agent: **VAN WESTENBRUGGE, Andries**; Nederland-
sch Octrooibureau, Scheveningseweg 82, P.O. Box 29270,
NL-2502 LS The Hague (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

[Continued on next page]

(54) Title: DRAWER COMBINATION OF DRAWER CABINET AND DRAWER AS WELL AS AIRCRAFT OR TRAIN PROVIDED WITH SUCH A COMBINATION

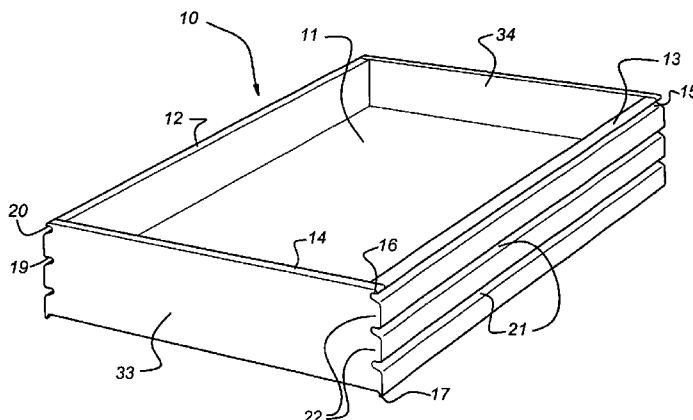

(57) Abstract: The invention relates to a drawer comprising a bottom surface (11), two opposing side walls (12,13) and a top surface (14). The side walls are each provided at the top with a recess (15) that extends over the entire side wall, is open towards the outside of the drawer and is delimited from above by a support body (16). Viewed in the vertical direction, the recesses are a recess distance (x) away from the top surface. Viewed in the horizontal direction, the outsides of the support bodies have an external support body spacing (v). The sidewalls are each provided with a supporting foot (17) that extends along the entire sidewall. Viewed in the vertical direction, the supporting foot extends to a supporting foot depth (y) below the bottom surface. Viewed horizontally, the insides of the supporting feet have an internal supporting foot spacing (w). The internal supporting foot spacing (w) is greater than the external support body spacing (v) and the supporting foot depth (y) is greater than the recess distance (x). The invention furthermore relates to a combination comprising at least one drawer according to the invention as well as a drawer cabinet. Furthermore, the invention relates to an aircraft provided with a combination according to the invention.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.