


A cross-sectional view of a container assembly 10. The assembly includes a container 12 with a wide, shallow body and a flared rim 14. A lid 16 is positioned on top of the container. A cylindrical component 20 is seated within the container, and a horizontal component 22 is positioned between the lid 16 and the cylindrical component 20.

[illegible][illegible]


工程												
第1設置工程												
第2設置工程												
敷設工程												
接續工程												

[illegible][illegible][illegible][illegible][illegible]

[図10]

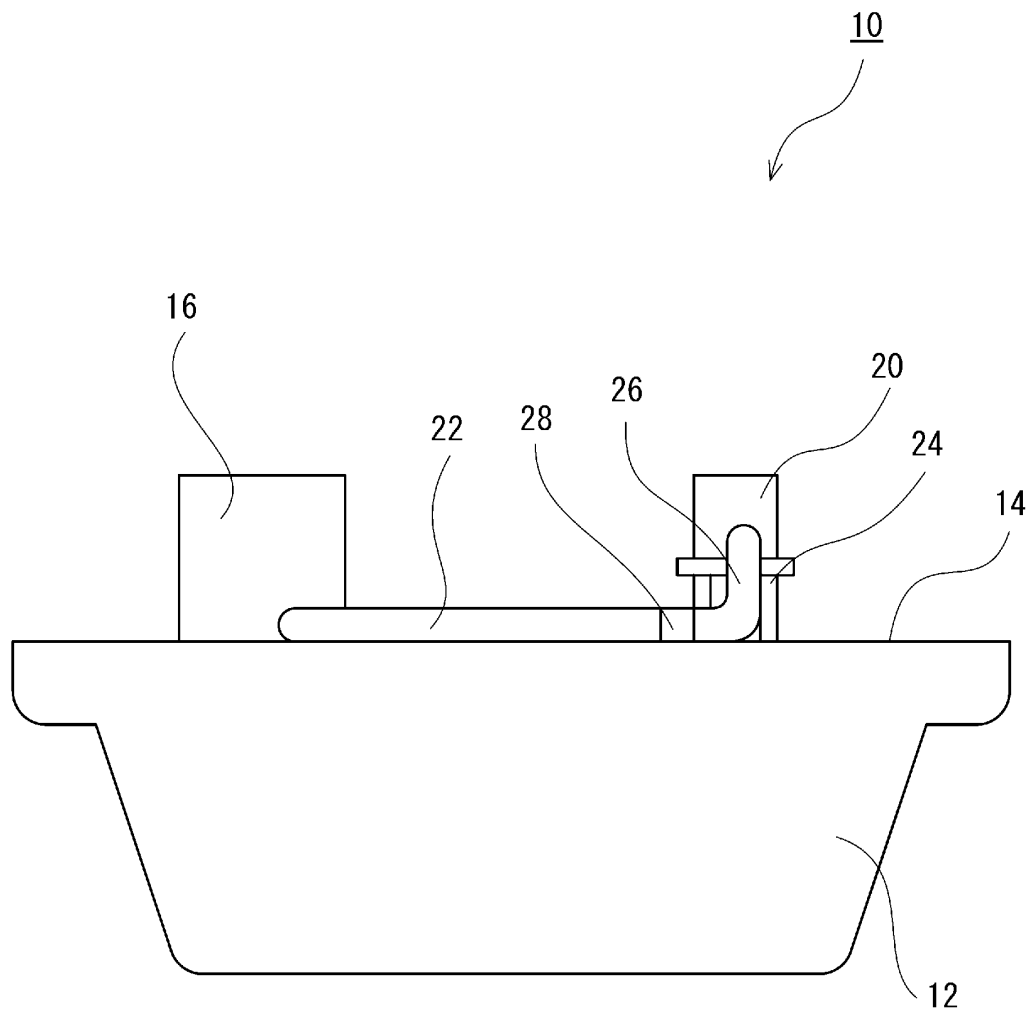

[図11]

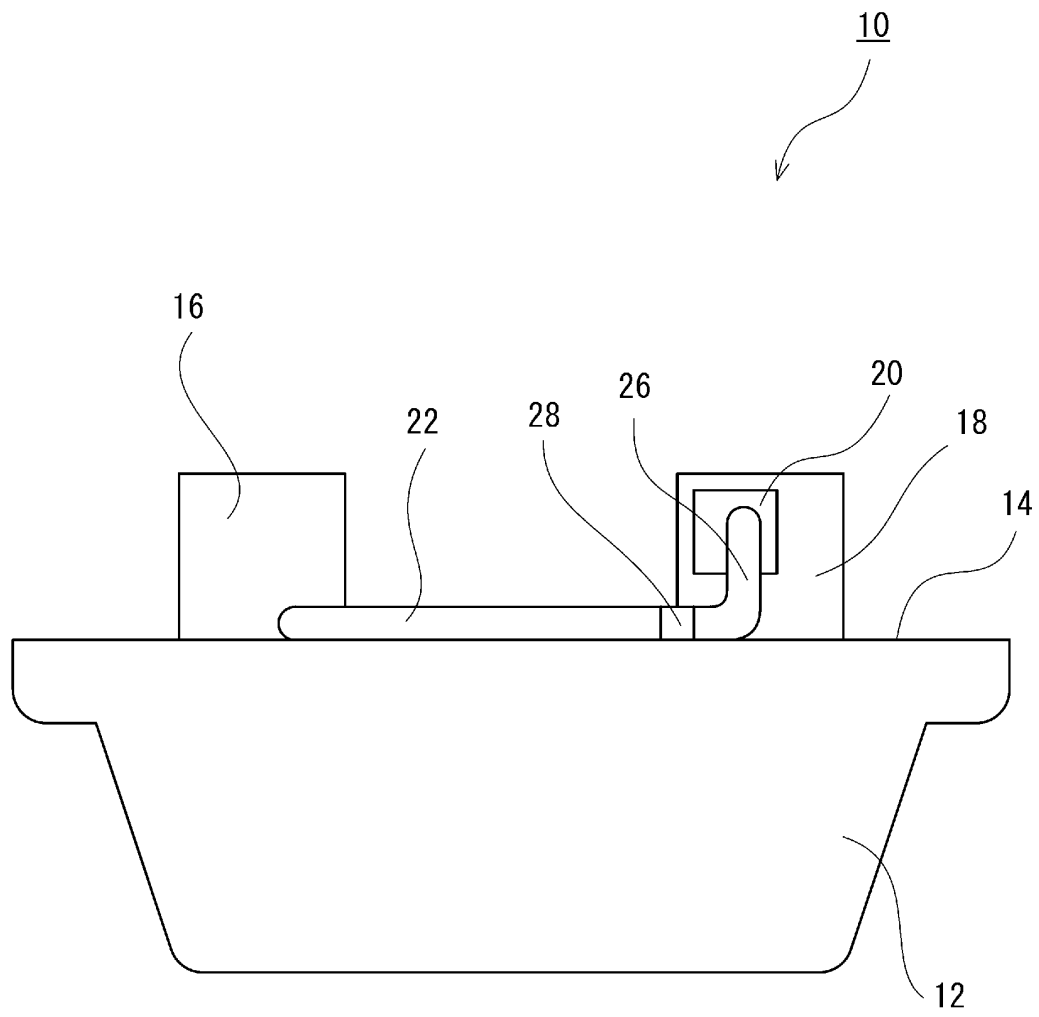

[図12]

