



- (51) International Patent Classification:
E21B 7/18 (2006.01)
- (21) International Application Number:
PCT/US2014/037054
- (22) International Filing Date:
7 May 2014 (07.05.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13/904,873 29 May 2013 (29.05.2013) US
- (71) Applicant: **VETCO GRAY INC.** [US/US]; 4424 West Sam Houston Pkwy North, Suite 100, Houston, TX 77041 (US).
- (72) Inventors: **PERRUCCI, Lucas, Antonio**; Praça Jesuino Bandeira, 51, Sao Paulo, SP 05048-090 (BR). **ALFANO, Pedro, Paulo**; Alameda das Perobas, 179, Santana do Parnaiba 06519-335 (BR). **BORNIA, Guaraci**; Rod. de Acesso Joao de Goes, 2300, Jardim Alvorada, Jandira, SP

(BR). **AZEVEDO, Tarso Adriano, Alves**; Rod. de Acesso Joao de Goes, 2300, Jandira, SP 06612-000 (BR). **SE-QUEIRA, Carlos Eduardo, Menardi**; Rua Machado de Assis, 772-ap. 123, Sao Paulo, SP 04106-001 (BR).

(74) Agents: **DOMBROWSKI, Joanna, M.** et al.; General Electric Company, Global Patent Operation, 2 Corporate Drive, Suite 648, Shelton, CT 06484 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR MEASURING INCLINATION IN SUBSEA RUNNING, SETTING AND TESTING TOOLS

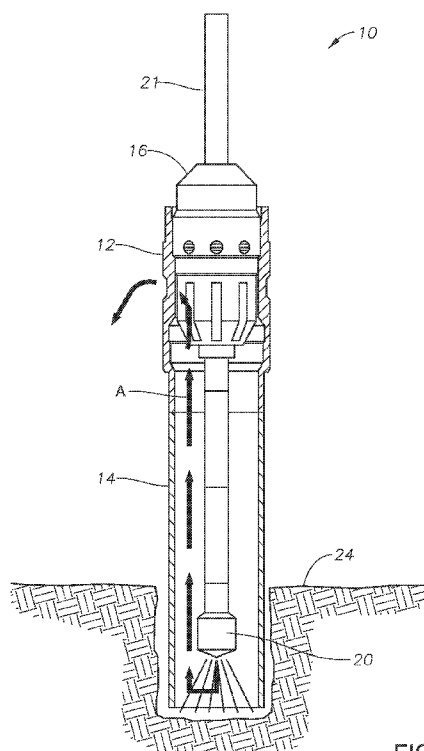


FIG. 2

(57) Abstract: A system for jetting a borehole in a seafloor (24), the system including a tubular (16), and a jetting tool (20) inserted into the tubular (16) and having an end from which fluid is selectively discharged to excavate the borehole. An electrical inclination sensor (38) is attached to the stem (21) of the tubular (16), and is in communication a transmitter (40). A receiver (42) is positioned proximate the sea surface and is in communication with the transmitter (40) through the fluid in a drill pipe (18), so that when the jetting tool (20) is excavating the borehole, an inclination of the tubular (16) is sensed by the inclination sensor (38), which inclination is communicated from the transmitter (40) to the receiver (42).



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*