



- (51) **International Patent Classification:**
C25D 17/00 (2006.01) **H01L 21/67** (2006.01)
C25D 17/06 (2006.01)
- (21) **International Application Number:**
PCT/EP2013/069117
- (22) **International Filing Date:**
16 September 2013 (16.09.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
10 2012 019 389.0
2 October 2012 (02.10.2012) DE
- (71) **Applicant:** **ATOTECH DEUTSCHLAND GMBH**
[DE/DE]; Erasmusstraße 20, 10553 Berlin (DE).
- (72) **Inventors:** **RAUENBUSCH, Ralph**; Kornstraße 24,
92318 Neumarkt (DE). **THOMAS, Christian**; Eichholz-
straße 9a, 91058 Erlangen (DE). **WEINHOLD, Ray**;
Habsburgerstraße 70a, 90475 Nürnberg (DE). **KLINGL,**
Heinz; Schönblickstraße 3, 86356 Neusäß (DE).
- (74) **Agent:** **WONNEMANN, Jörg**; Atotech Deutschland
GmbH, Erasmusstraße 20, 10553 Berlin (DE).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published: — with international search report (Art. 21(3))

(54) **Title:** HOLDING DEVICE FOR A PRODUCT AND TREATMENT METHOD

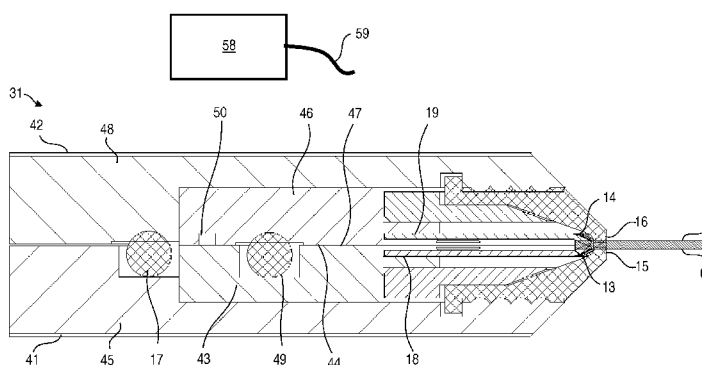


FIG. 6

(57) **Abstract:** A holding device for a treatment of a product (5), which holding device comprises a first holding part (41) and a second holding part (42). The first holding part (41) comprises at least one first electrical contact element (13) for establishing a contact with a first side (6) of the product (5). The second holding part (42) comprises at least one second electrical contact element (14) for establishing a contact with a second side (7) of the product (5), which second side lies opposite the first side (6). The first holding part (41) and the second holding part (42) are arranged in such a way that they can be fastened to one another in a detachable manner for the purpose of holding the product (5). A product seal (15, 16) and a housing seal (17) provide a sealing arrangement to prevent the penetration of fluid into the at least one first electrical contact element (13) and the at least one second electrical contact element (14) in a treatment state.